Customer Name:

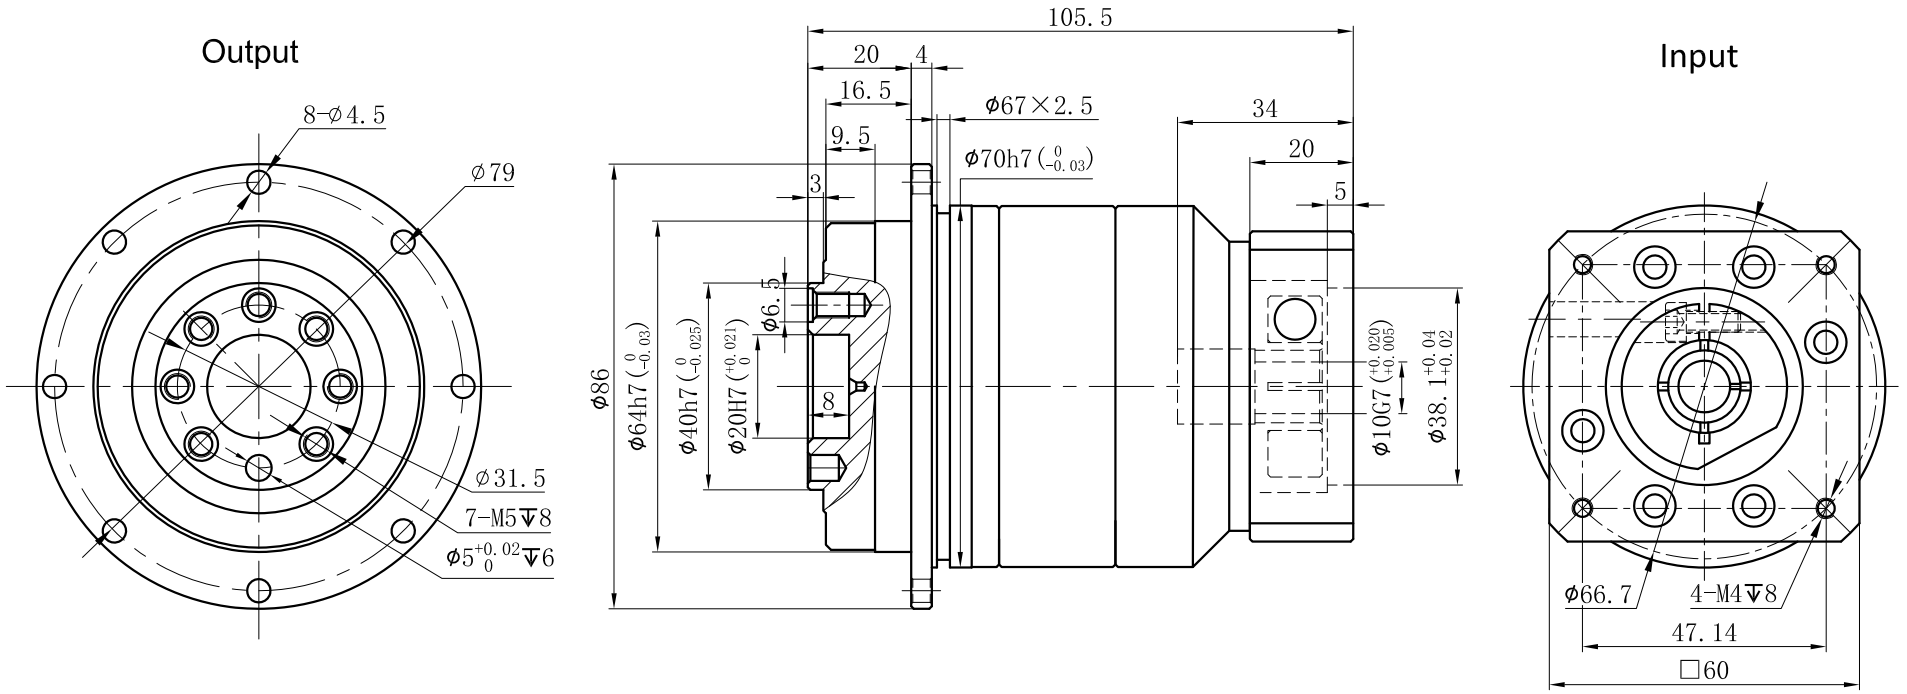

Transmission Ratio	(A):1	Mass Moments Of Inertia	(B)Kg.cm^2
Rated Output Torque	(C)Nm	Max Output Torque	(D)Nm
Rated Input Speed	5000rpm	Max Input Speed	10000rpm
Max Bending Moment	125N	Max Axial Force	1050N
Efficiency	≥ 94%	Operating Temperature	-20°~+90°
Mounting Position	Any	Lubrication Method	Synthetic grease
Weight ±3%	1.6Kg	Service Life	30000h
Standard Backlash	≤ 7arcmin	Protection Class	IP65
Motor Power	- - KW	Noise Level	58dB
Motor Dimensions			

					Sign/Date					
	20	0.03	48	86.4			100	0.03	40	72
	25	0.03	60	108						
	35	0.03	50	90						
	40	0.03	48	81						
	50	0.03	60	108						
	70	0.03	50	90						
	A	B	C	D		Ratio	A	B	C	D

Note

φ14 to φ10

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

Precision Planetary Reducer

GD064

GD064-L2

Shaft Type	Precision

Above specifications are for standard reducer and may be subject to change without notice.