Customer name：

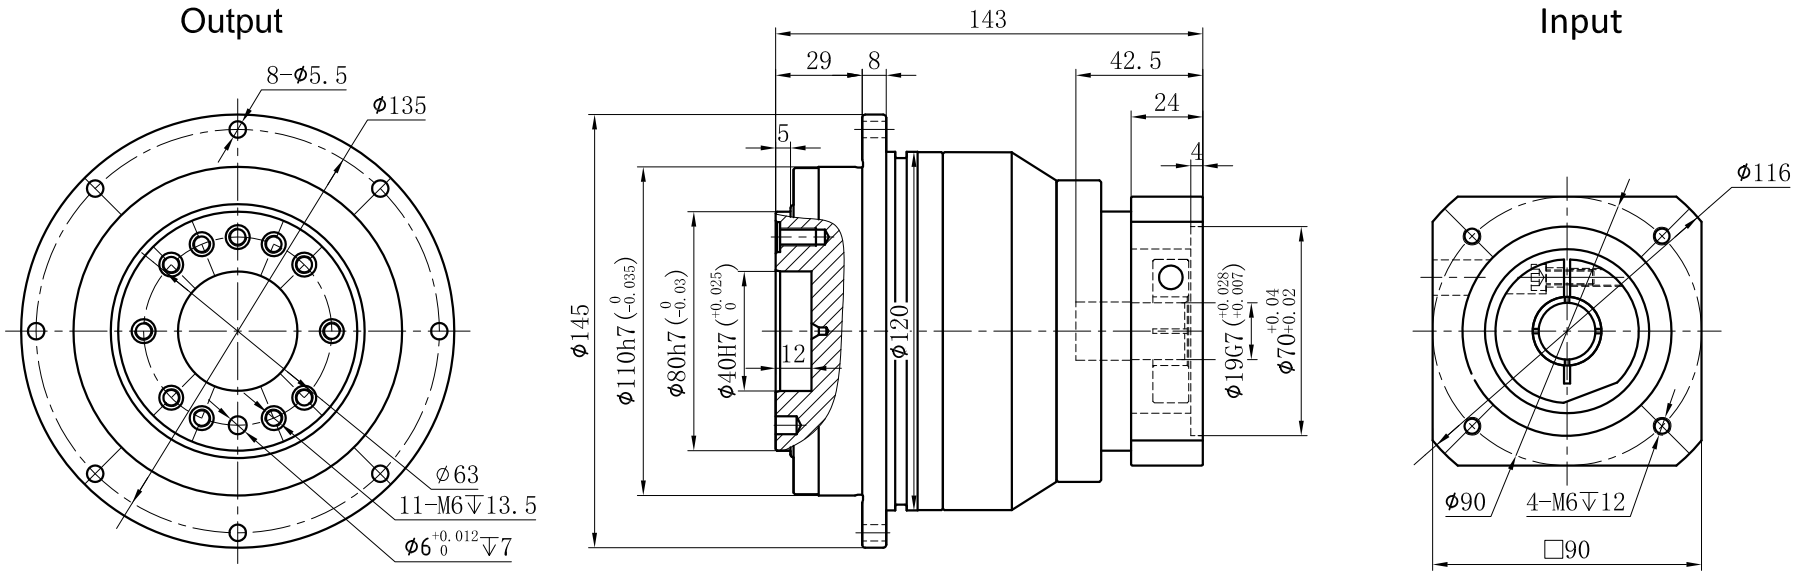

Transmission ratio	(A):1	Mass moments of inertia	(B)Kg.cm^2
Rated output torque	(C)Nm	Max.Output torque	(D)Nm
Rated input speed	4000rpm	Max input speed	8000rpm
Max Benging Moment	430Nm	Max.axial force	2990N
Efficiency	≥ 94%	Operating temperature	-20°~+90°
Mounting position	Any	Lubrication method	Synthetic grease
Weight ±3%	7.3Kg	Service life	20000h
Standard backlash	≤ 7 arcmin	Protection class	IP65
Motor power		Noise level	60dB
Motor dimensions			

	40	0.47	270	486	Sign/Date					
	35	0.47	300	540			100	0.44	230	414
	25	0.47	330	594			70	0.44	300	540
	20	0.47	270	486						
							50	0.44	330	594
Ratio	A	B	C	D		Ratio	A	B	C	D

NOTE

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

Precision Planetary Reducer

GEARKO®

GD110	
GD110-L2	
Shaft Type	Precision