Customer Name:

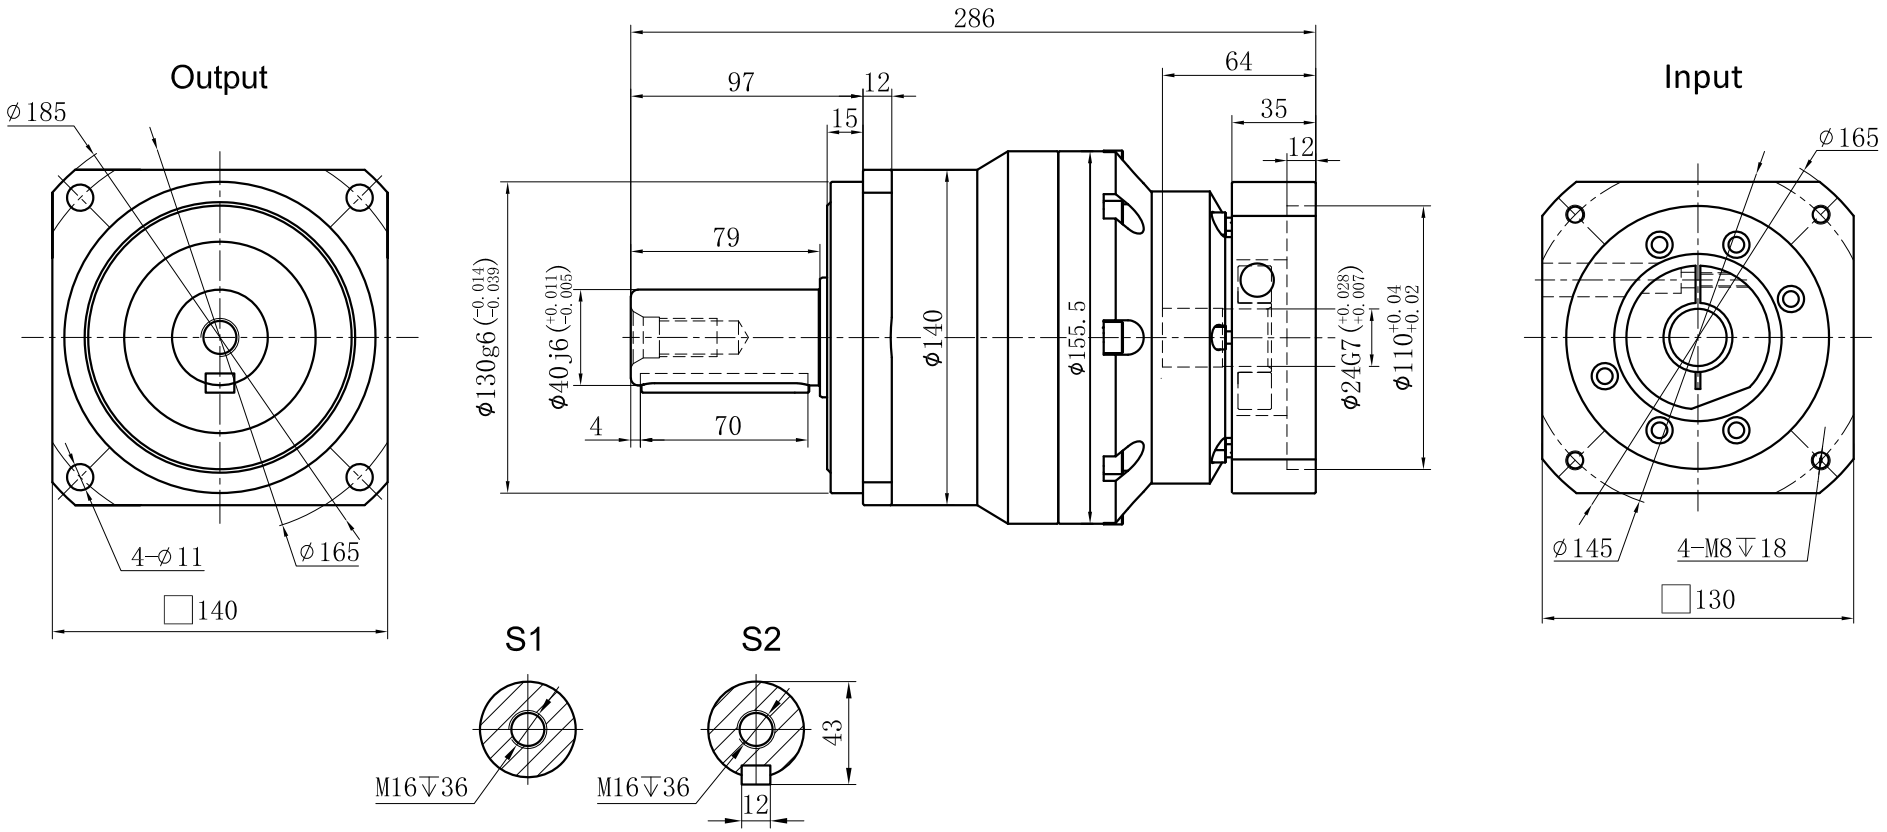

Transmission Ratio	(A):1	Mass Moments Of Inertia	(B)Kg.cm^2
Rated Output Torque	(C)Nm	Max Output Torque	(D)Nm
Rated Input Speed	3000rpm	Max Input Speed	4000rpm
Max Radial Force	9400N	Max Axial Force	4700N
Efficiency	≥ 94%	Operating Temperature	-20°~+90°
Mounting Position	Any	Lubrication Method	Synthetic grease
Weight ±3%	19.8Kg	Service Life	20000h
Standard Backlash	≤ -- arcmin	Protection Class	IP65
Motor Power	--KW	Noise Level	65dB
Motor Dimensions			

Ratio	A	B	C	D
	20	2.71	535	963
	25	2.71	650	1170
	30	2.71	600	1080
	35	2.71	550	990
	40	2.71	500	900

Sign/Date

Ratio	A	B	C	D
	50	2.54	650	1170
	60	2.54	600	1080
	70	2.54	550	990
	80	2.54	500	900
	100	2.54	445	801

Note

Mark	No.	Sign	Date
DRAW			
CHEC			
APPR			
RULE			

Precision Planetary Reducer

GCB140A

GCB140A-L2

Shaft Type	Precision

GEARKO®

Above specifications are for standard reducer and may be subject to change without notice.