


Customer Name:

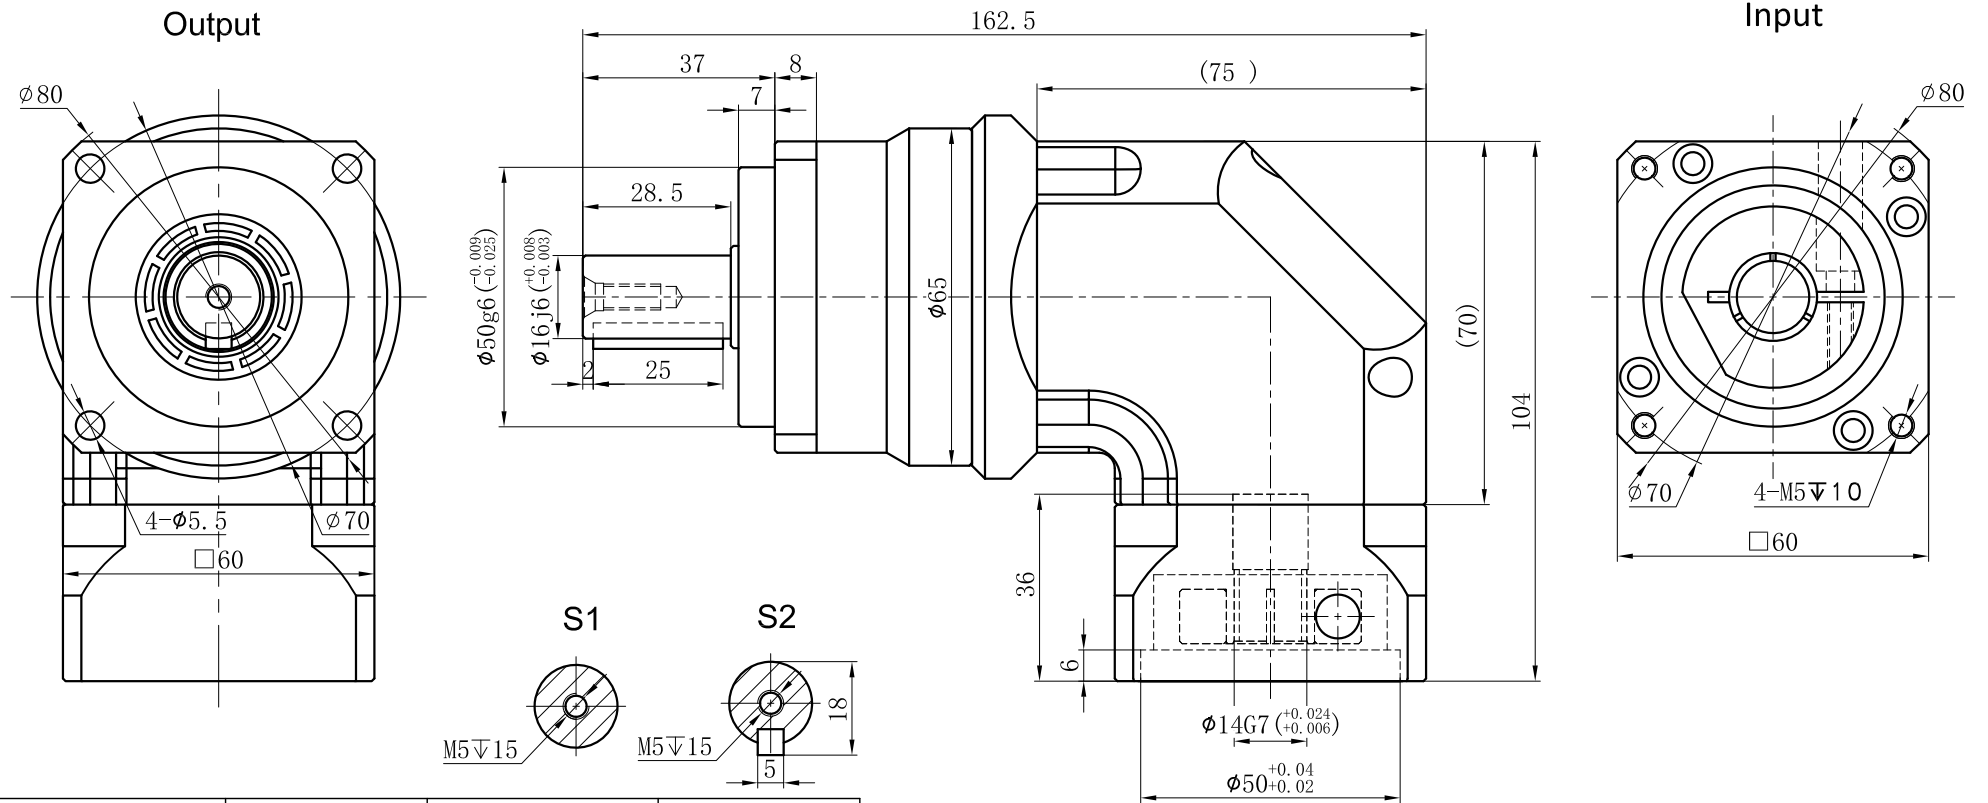

Transmission Ratio	(A):1	Mass Moments Of Inertia	(B)Kg.cm ²	3	0.35	35	63	Sign/Date	4	0.35	45	81	
Rated Output Torque	(C)Nm	Max Output Torque	(D)Nm	5	0.35	55	99		6	0.35	50	90	
Rated Input Speed	3000rpm	Max Input Speed	5000rpm	7	0.35	46	82.8		8	0.35	43	77.4	
Max Radial Force	1450N	Max Axial Force	724N	10	0.35	40	72		12	0.07	50	90	
Efficiency	≥ 95%	Operating Temperature	-20°~+90°	14	0.07	40	72		16	0.07	43	77.4	
Mounting Position	Any	Lubrication Method	Synthetic grease	20	0.07	40	72		Ratio	A	B	C	D
Weight ±3%	1.5Kg	Service Life	20000h	Ratio	A	B	C	D	Precision Planetary Reducer				GCBR060
Standard Backlash	≤ -- arcmin	Protection Class	IP65	Note					GCBR060-L1				
Motor Power	-- KW	Noise Level	66dB	Mark	No.	Sign	Date					Shaft Type	Precision
Motor Dimensions					DRAW								
					CHEC								
					APPR								
					RULE								

Above specifications are for standard reducer and may be subject to change without notice.