


Customer name:

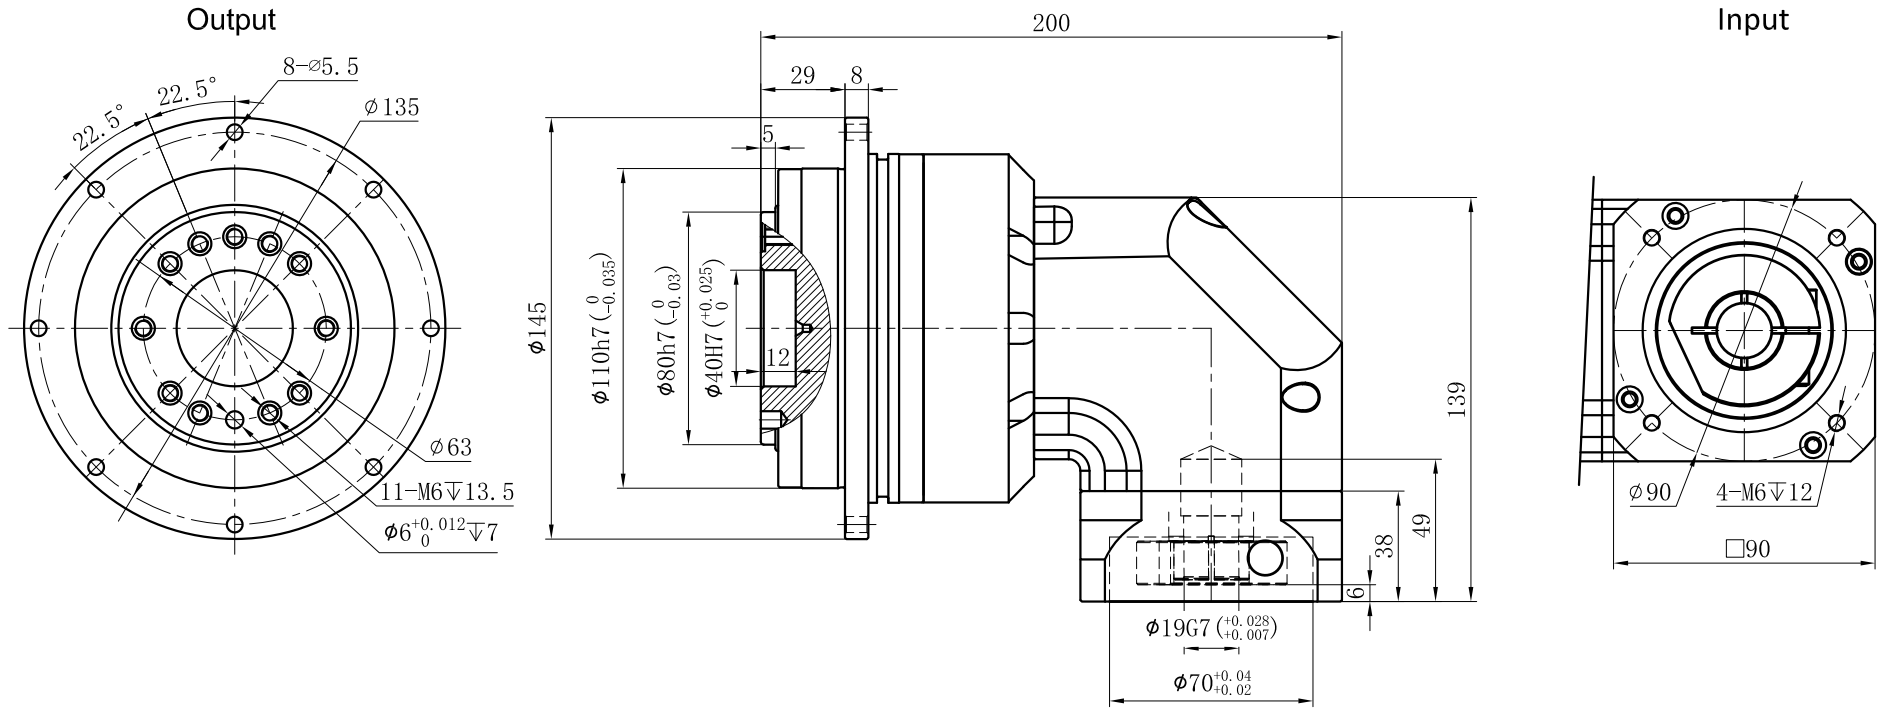

Transmission ratio	( A ):1	Mass moments of inertia	( B )Kg.cm <sup>2</sup>												
Rated output torque	( C )Nm	Max.Output torque	( D )Nm	50	2.25	330	594	Sign/Date	200	1.87	230	414			
Rated input speed	4000rpm	Max input speed	8000rpm	40	2.25	270	486		140	1.87	300	540			
Max Bending Moment	430Nm	Max.axial force	2990N	35	2.25	300	540		100	2.25	230	414			
Efficiency	≥ 92%	Operating temperature	-20°~+90°	25	2.25	330	594		70	2.25	300	540			
Mounting position	Any	Lubrication method	Synthetic grease	Ratio	A	B	C	D	Ratio	A	B	C	D		
Weight ±3%	11Kg	Service life	30000h	NOTE											
Standard backlash	≤ 9 arcmin	Protection class	IP65												
Motor power		Noise level	68dB												
Motor dimensions															
				Mark				No.	Sign	Date	Precision Planetary Reducer		GDR110		
				DRAW									GDR110-L2		
				CHEC									Shaft Type		Precision
				APPR											
				RULE											

Above specifications are for standard reducer and may be subject to change without notice.