


Customer Name:

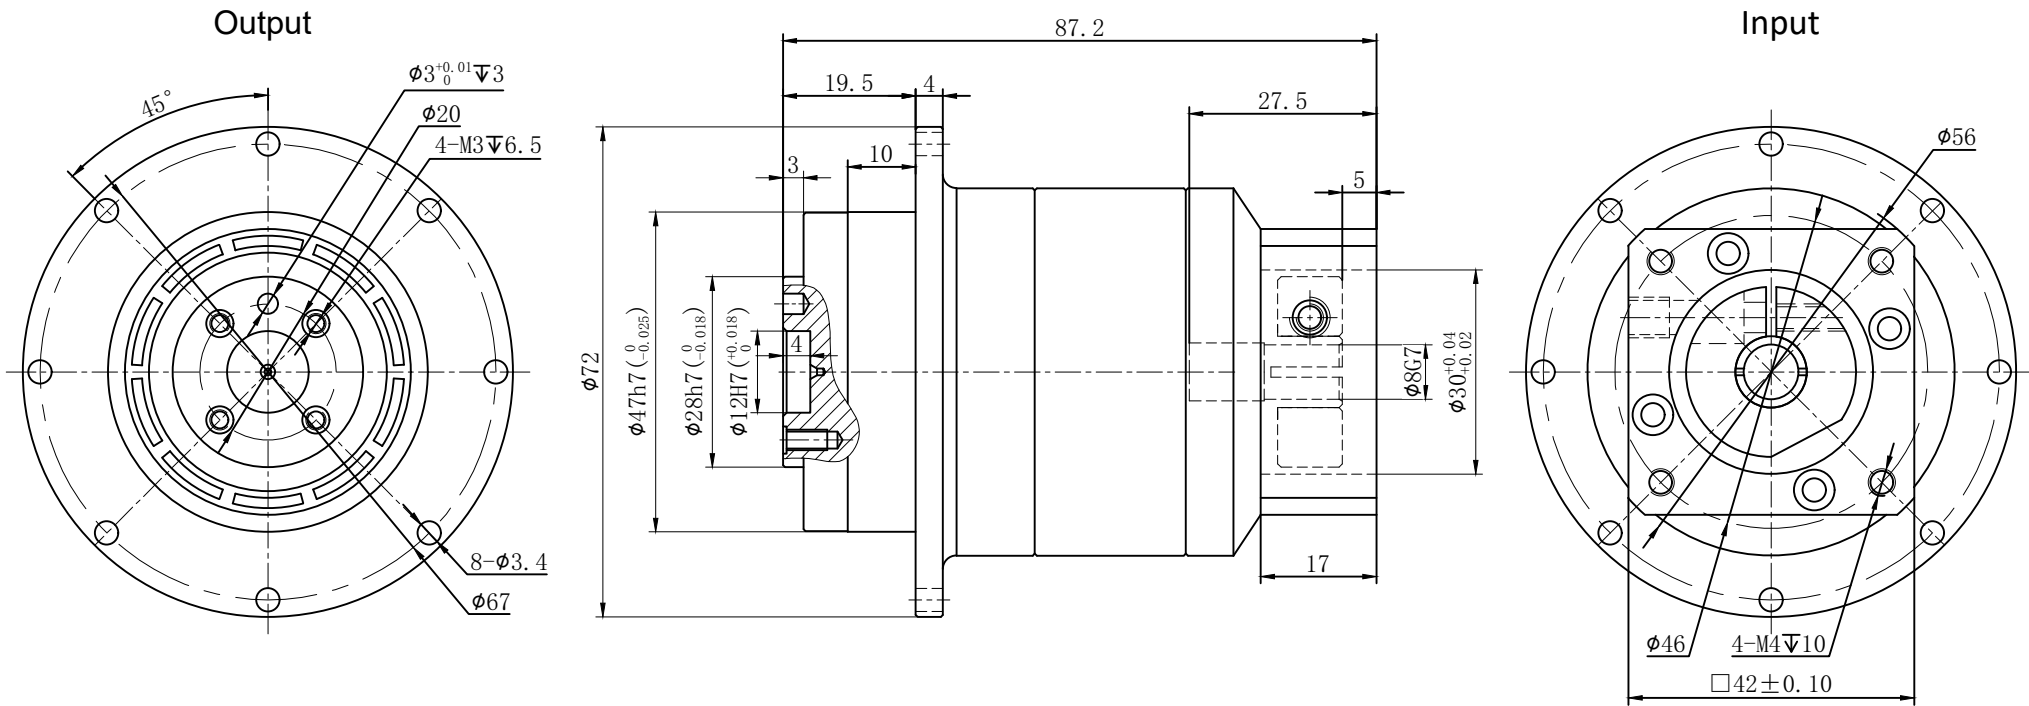

Transmission Ratio	(A):1	Mass Moments Of Inertia	(B)Kg.cm ²										
Rated Output Torque	(C)Nm	Max Output Torque	(D)Nm	20	0.03	19	34.2	Sign/Date	50	0.03	20	36	
Rated Input Speed	4000rpm	Max Input Speed	8000rpm	25	0.03	20	36		70	0.03	19	34.2	
Max Benging Moment	42.5Nm	Max Axial Force	450N	35	0.03	19	34.2		100	0.03	14	25.2	
Efficiency	≥ 94%	Operating Temperature	-20~+90°	40	0.03	19	34.2						
Mounting Position	Any	Lubrication Method	Synthetic grease	Ratio	A	B	C	D	Ratio	A	B	C	D
Weight ±3%	1Kg	Service Life	30000h	Note					Precision Planetary Reducer		GD047		
Standard Backlash	--arcmin	Protection Class	IP65	Mark	No.	Sign	Date				GD047-L2		
Motor Power	-- KW	Noise Level	56dB								Shaft Type	Precision	
Motor Dimensions													

Above specifications are for standard reducer and may be subject to change without notice.