
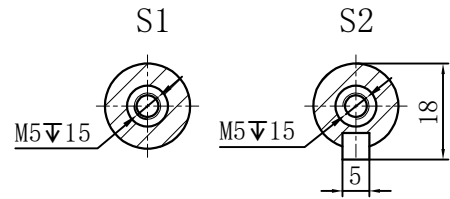
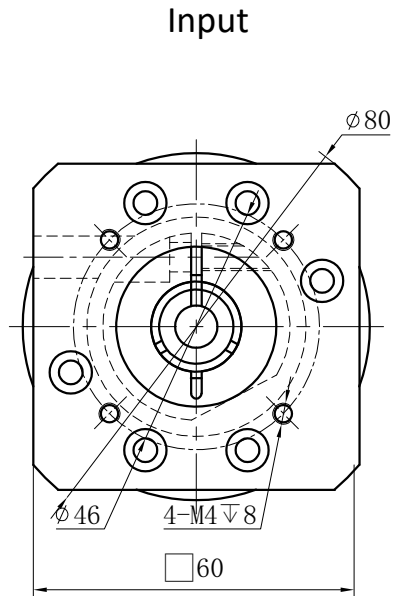
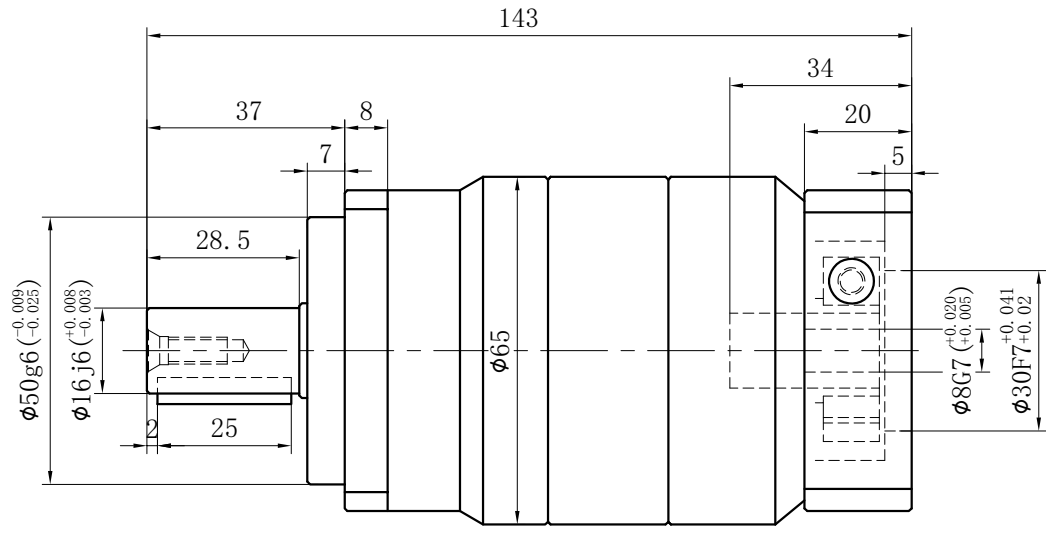
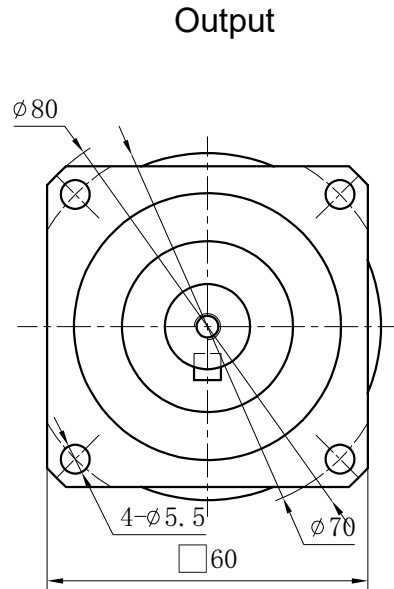



Customer Name:



Transmission Ratio	( A ):1	Mass Moments Of Inertia	( B )Kg.cm <sup>2</sup>
Rated Output Torque	( C )Nm	Max Output Torque	( D )Nm
Rated Input Speed	3000rpm	Max Input Speed	5000rpm
Max Radial Force	1530N	Max Axial Force	765N
Efficiency	≥ 94%	Operating Temperature	-20~+90°
Mounting Position	Any	Lubrication Method	Synthetic grease
Weight ±3%	1.7Kg	Service Life	20000h
Standard Backlash	≤ 7arcmin	Protection Class	IP65
Motor Power	-- KW	Noise Level	58dB
Motor Dimensions			

	40	0.13	45	81	Sign/Date					
	35	0.13	45	81			100	0.13	35	63
	30	0.13	50	90			80	0.13	45	81
	25	0.13	55	99			70	0.13	45	81
	20	0.13	45	81			60	0.13	50	90
	15	0.13	40	72			50	0.13	55	99
Ratio	A	B	C	D		Ratio	A	B	C	D

Note						Precision Planetary Reducer	GCB060A		
Mark  No. Sign Date							GCB060A-L2		
							Shaft Type	Precision	

Above specifications are for standard reducer and may be subject to change without notice.