


Customer name:

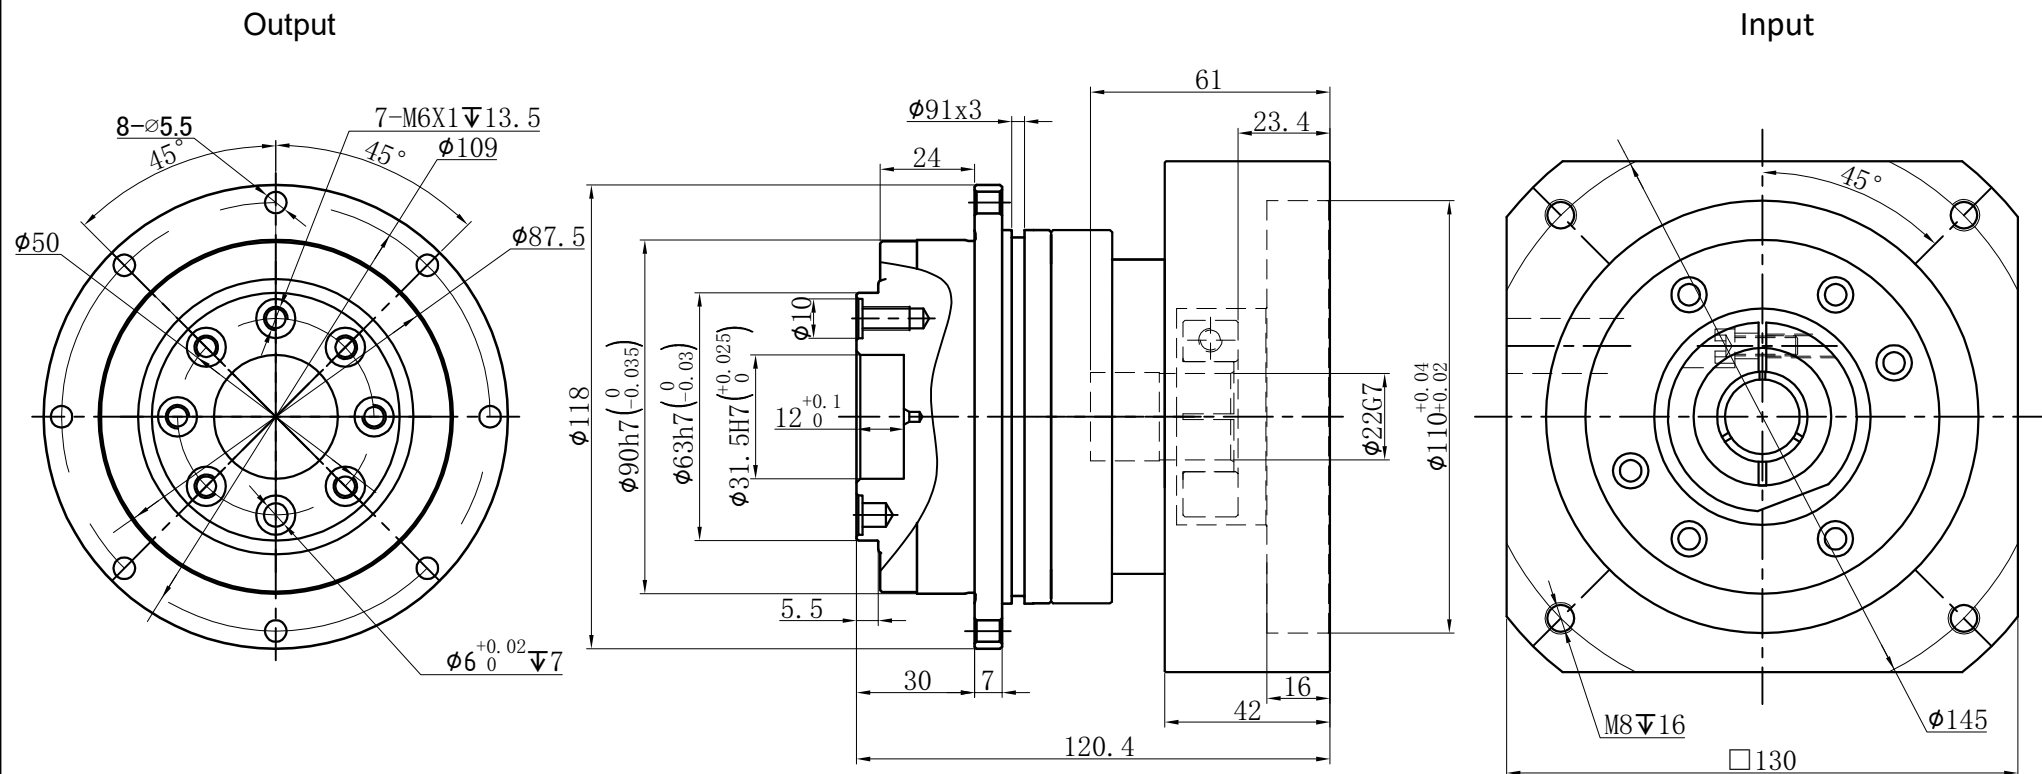

Transmission ratio	( A ):1	Mass moments of inertia	( B )Kg.cm <sup>2</sup>										
Rated output torque	( C )Nm	Max.output torque	( D )Nm										
Rated input speed	4000rpm	Max input speed	8000rpm	10	0.44	100	180	Sign/Date					
Max Bending Moment	235Nm	Max.axial force	2850N	7	0.45	140	252						
Efficiency	≥ 97%	Operating temperature	-20~+90°	5	0.47	160	280						
Mounting position	Any	Lubrication method	Synthetic grease	4	0.48	130	234						
Weight ±3%	3Kg	Service life	20000h	Ratio	A	B	C	D					
Standard backlash	≤ 5 arcmin	Protection class	IP65	Note									
Motor power		Noise level	60dB										
Motor dimensions													

	Mark	No.	Sign	Date		Precision planetary reducer	GD090	
							GD090-L1	
							Shaft Type	Precision

Above specifications are for standard reducer and may be subject to change without notice.