
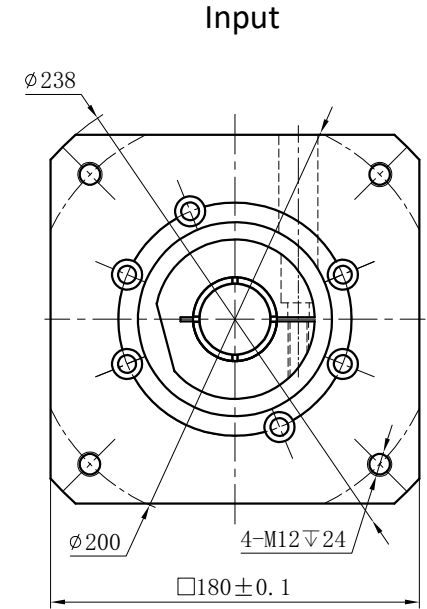
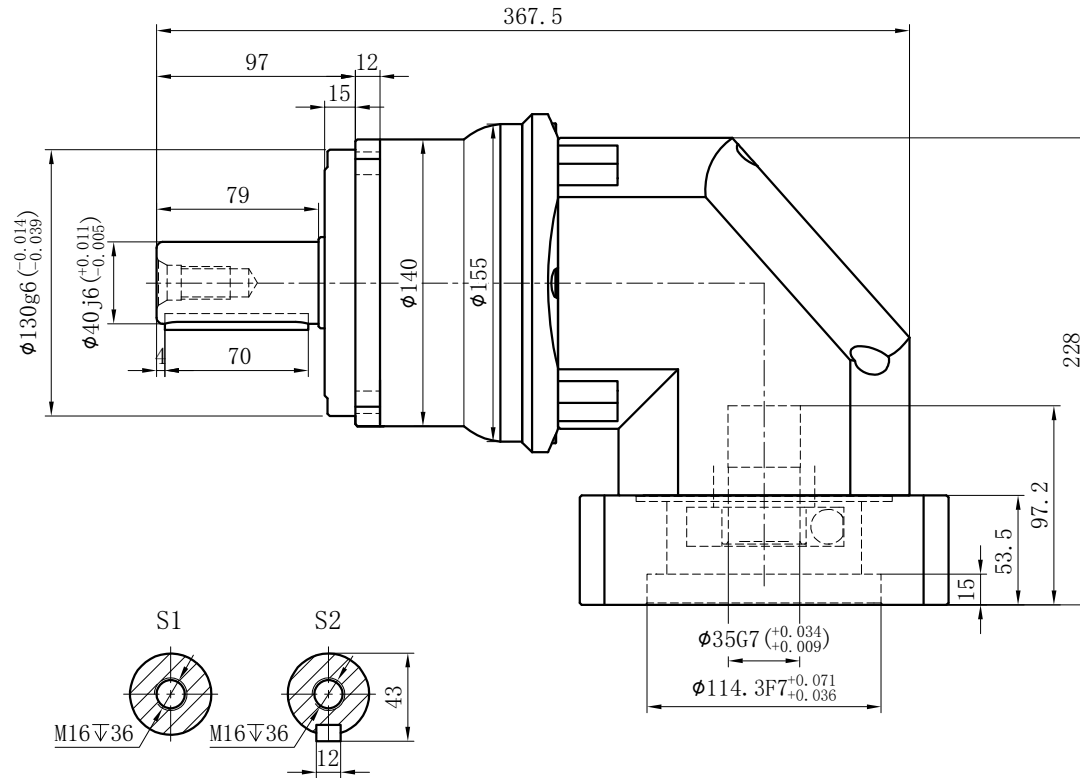


Customer name:

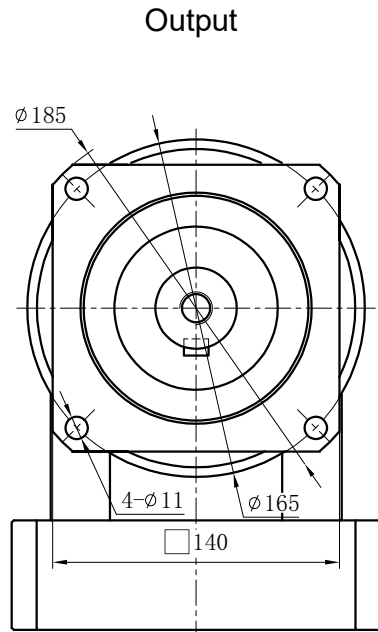

Transmission ratio	( <u>A</u> ):1	Mass moments of inertia	( <u>B</u> )Kg.cm <sup>2</sup>											
Rated output torque	( <u>C</u> )Nm	Max.output torque	( <u>D</u> )Nm	3	23.4	342	615	Sign/Date	10	23.4	450	810		
Rated input speed	3000rpm	Max input speed	6000rpm	4	23.4	520	936		12	21.8	600	1080		
Max.Radial Force	9400N	Max.Axial Force	4700N	5	23.4	650	1170		14	21.8	550	990		
Efficiency	≥ 95%	Operating temperature	-20°~+90°	6	23.4	600	1080		16	21.8	500	900		
Mounting position	Any	Lubrication method	Synthetic grease	7	23.4	550	990		20	21.8	450	810		
Weight ±3%	25.2Kg	Service life	20000h	8	23.4	500	900							
Standard backlash	≤ 6 arcmin	Protection class	IP65	Ratio	A	B	C		D	Ratio	A	B	C	D
Motor power	-- KW	Noise level	70dB	Note						Precision planetary reducer				
Motor dimensions														
				Mark	No.	Sign	Date		GCBR140-L1					
					DRAW									
					CHEC									
					APPR									
					RULE									

Above specifications are for standard reducer and may be subject to change without notice.