


Customer name:

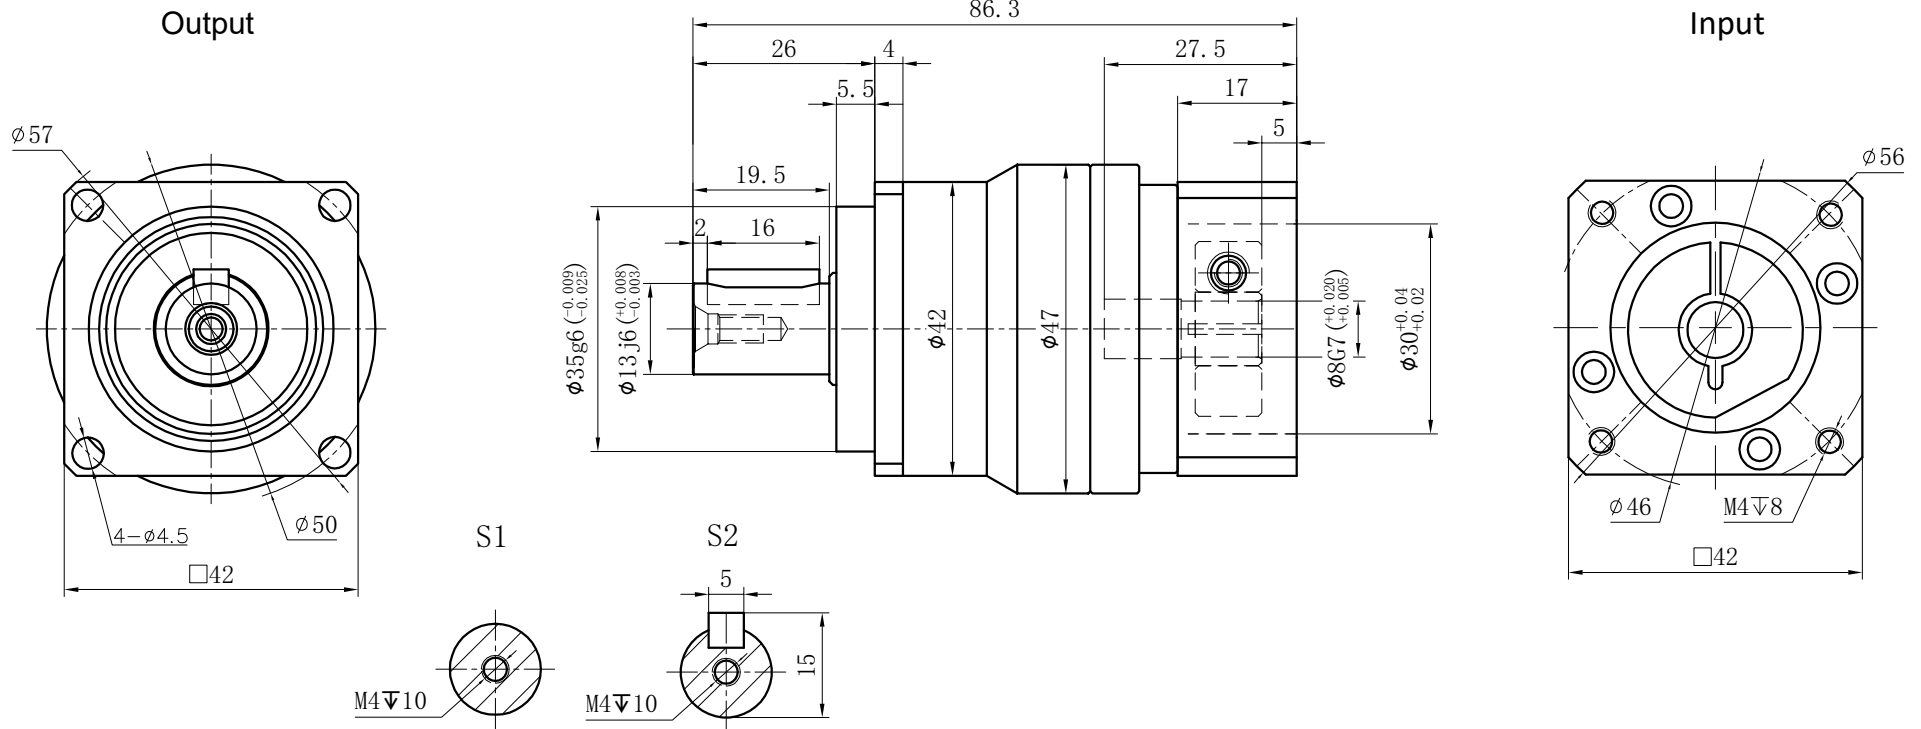

Transmission ratio	(A):1	Mass moments of inertia	(B)Kg.cm ²
Rated output torque	(C)Nm	Max.Output torque	(D)Nm
Rated input speed	3000rpm	Max input speed	6000rpm
Max.radial force	760N	Max.axial force	380N
Efficiency	≥ 97%	Operating temperature	-20°~+90°
Mounting position	Any	Lubrication method	Synthetic grease
Weight ±3%	--Kg	Service life	20000h
Standard backlash	≤ 5 arcmin	Protection class	IP65
Motor power		Noise level	56dB
Motor dimensions			

					Sign/Date					
	10	0.03	14	25.2						
	7	0.03	19	34.2						
	5	0.03	19	34.2						
	4	0.03	17	30.6						
Ratio	A	B	C	D		Ratio	A	B	C	D
NOTE					Precision Planetary Reducer					
					GCB042					
					GCB042-L1					
					Shaft Type					
					Precision					

Above specification are for standard reducer, No standard reducer only for reference