


Customer Name:

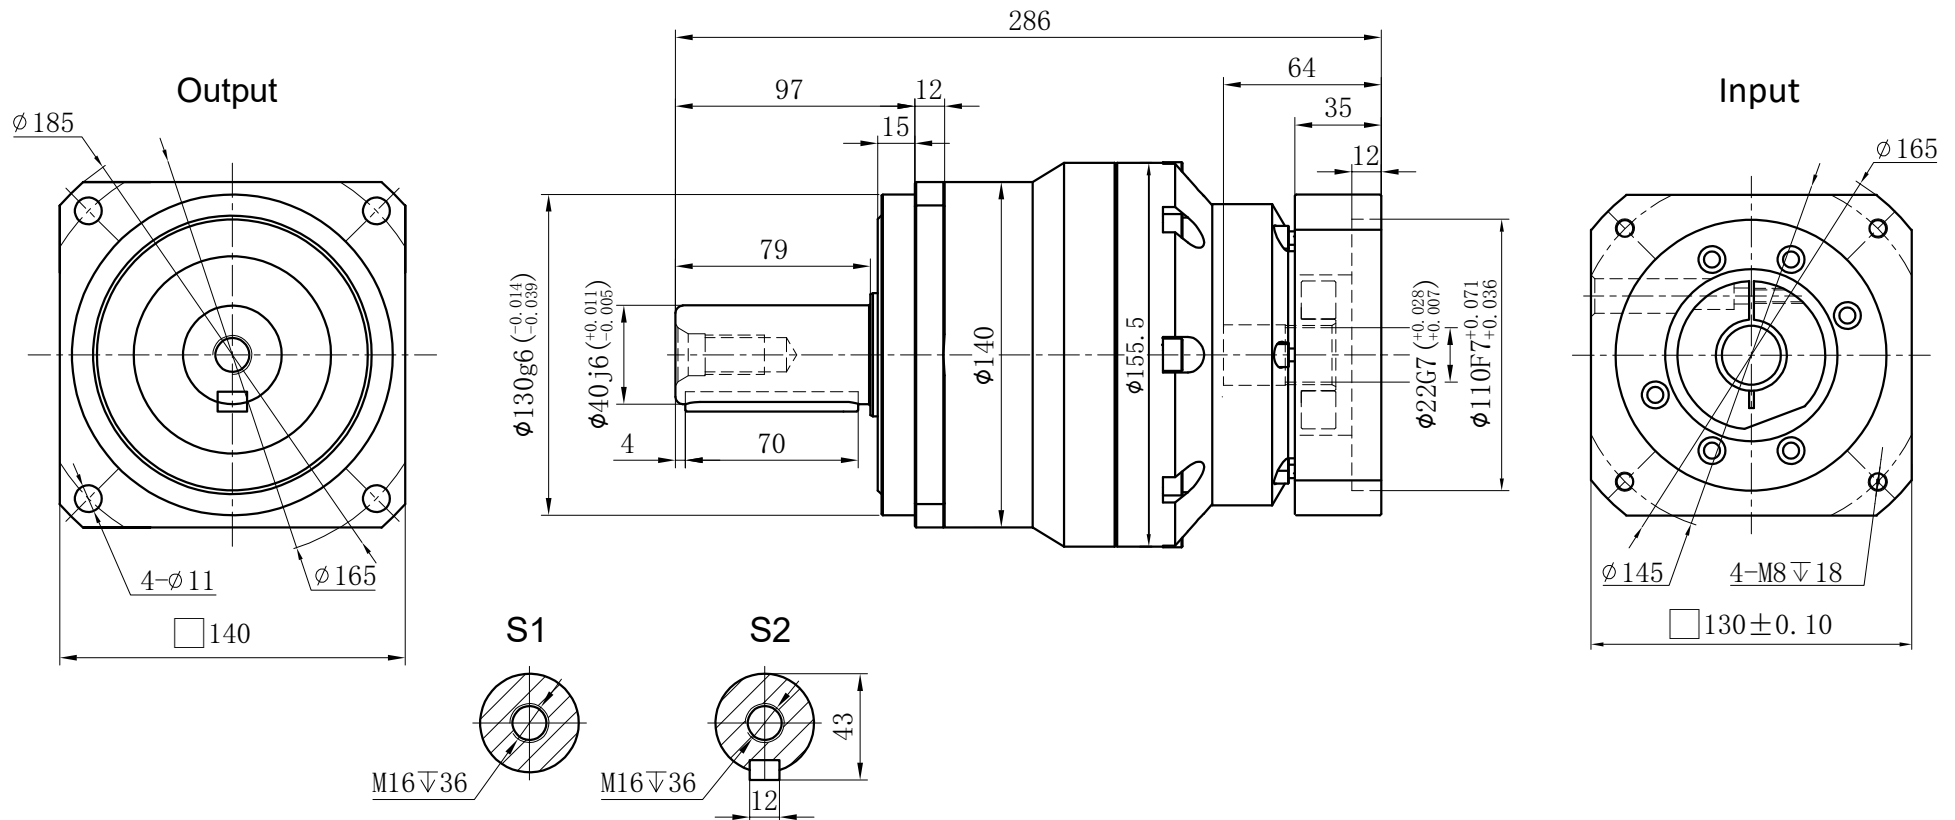

Transmission Ratio	( A ):1	Mass Moments Of Inertia	( B )Kg.cm <sup>2</sup>										
Rated Output Torque	( C )Nm	Max Output Torque	( D )Nm	15	2.71	340	612	Sign/Date	50	2.54	650	1170	
Rated Input Speed	2000rpm	Max Input Speed	4000rpm	20	2.71	535	963		60	2.54	600	1080	
Max Radial Force	9400N	Max Axial Force	4700N	25	2.71	650	1170		70	2.54	550	990	
Efficiency	≥ 94%	Operating Temperature	-20°~+90°	30	2.71	600	1080		80	2.54	500	900	
Mounting Position	Any	Lubrication Method	Synthetic grease	35	2.71	550	990		100	2.54	445	801	
Weight ±3%	19.8Kg	Service Life	20000h	40	2.71	500	900						
Standard Backlash	≤ -- arcmin	Protection Class	IP65	Ratio	A	B	C	D	Ratio	A	B	C	D
Motor Power	-- KW	Noise Level	65dB	Note									
Motor Dimensions				φ24 to φ22	Mark	No.	Sign	Date	Precision Planetary Reducer		GCB140A		
										GCB140A-L2			
										Shaft Type	Precision		

Above specifications are for standard reducer and may be subject to change without notice.