
## Customer Name:

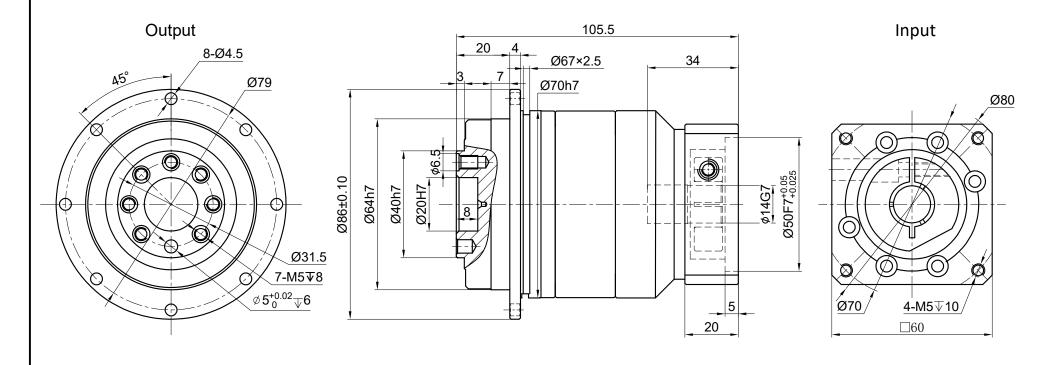

Transmission Ratio	( A ):1	Mass Moments Of Inertia	( <sub>B</sub> )Kg.cm <sup>2</sup>					1 1							
	<del></del>	+			20	0.03	48	86.4	Sign/Dat	_		100	0.03	40	72
Rated Output Torque	( <u>C</u> )Nm	Max Output Torque	(D)Nm		25	0.03	60	108	Sign/Dat	е					
Rated Input Speed	5000rpm	Max Input Speed	10000rpm		35	0.03	50	90							
					40	0.03	48	81							
Max Bending Moment	125N	Max Axial Force	1050N		50	0.03	60	108							
					70	0.03	50	90							
Efficiency	≥ 94%	Operating Temperature	-20°~+90°	Ratio	Α	В	С	D		R	Ratio	Α	В	С	D
Mounting Position	Any	Lubrication Method	Synthetic grease	Note					Precision Planetary Reduce			GD064			
Weight ±3%	1.6Kg	Service Life	30000h			Mark	No.	Sign	Date					GD 0 0	
Standard Backlash	≤ 3 arcmin	Protection Class	IP65				DRAW CHEC			<i></i>			GD064-L2		
Motor Power	KW	Noise Level	58dB				APPR						Shaft	Type	Precision
Motor Dimensions							RULE								