


Customer name:

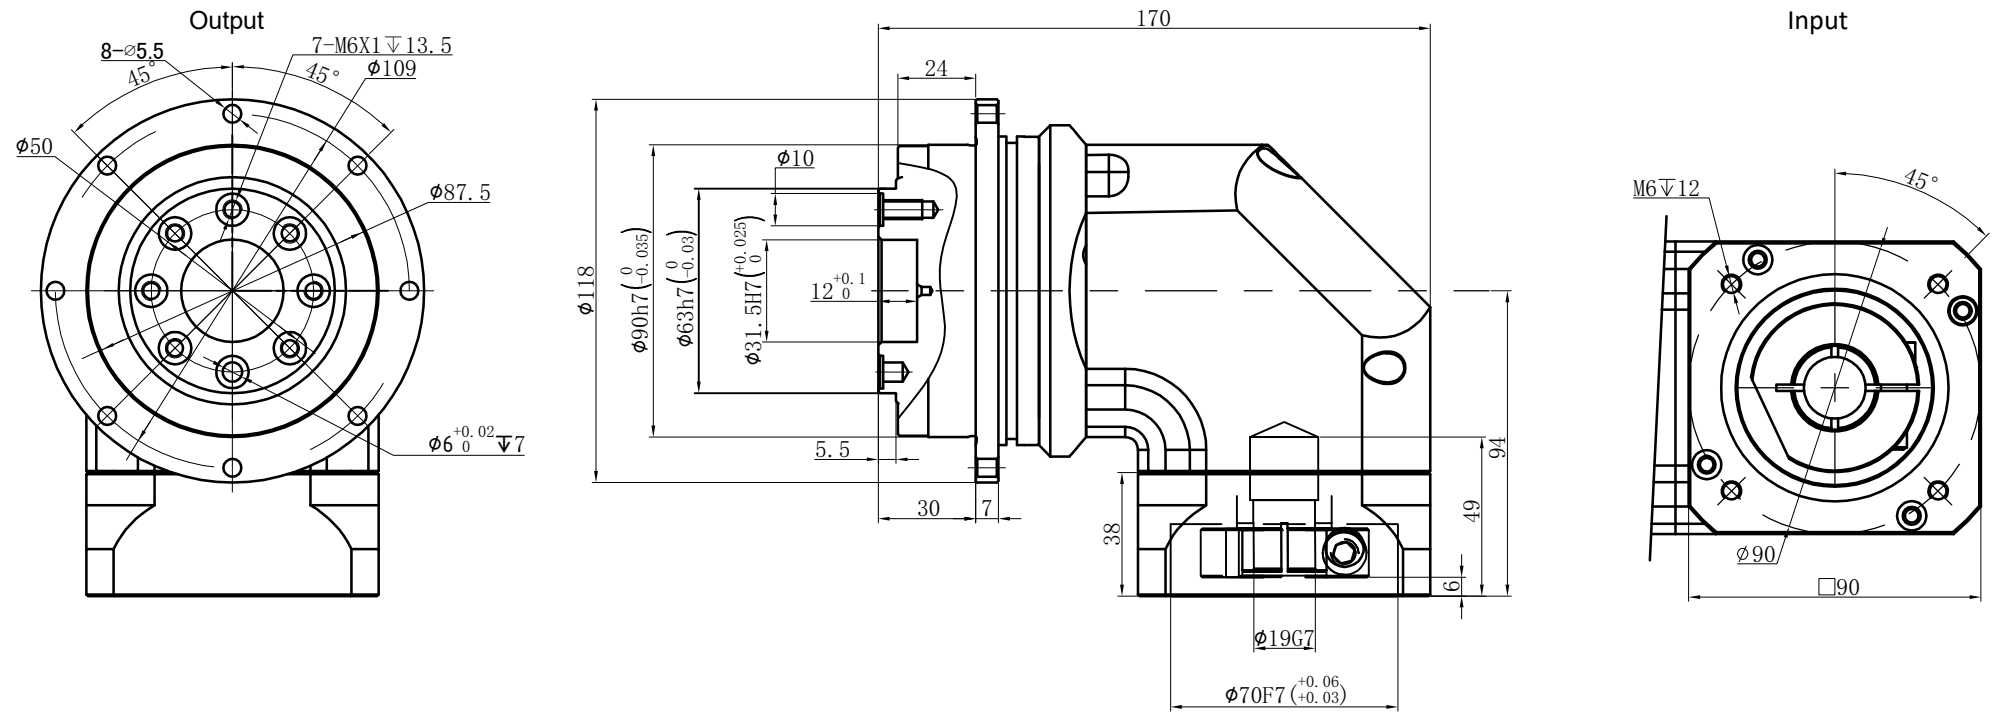

Transmission ratio	( A ):1	Mass moments of inertia	( B )Kg.cm <sup>2</sup>															
Rated output torque	( C )Nm	Max.output torque	( D )Nm															
Rated input speed	4000rpm	Max input speed	8000rpm															
Max Benging Moment	235Nm	Max.axial force	2850N															
Efficiency	≥ 97%	Operating temperature	-20~+90°															
Mounting position	Any	Lubrication method	Synthetic grease															
Weight ±3%	5Kg	Service life	20000h															
Standard backlash	≤ 6 arcmin	Protection class	IP65															
Motor power		Noise level	65dB															
Motor dimensions																		


Above specifications are for standard reducer and may be subject to change without notice.