


Customer Name:

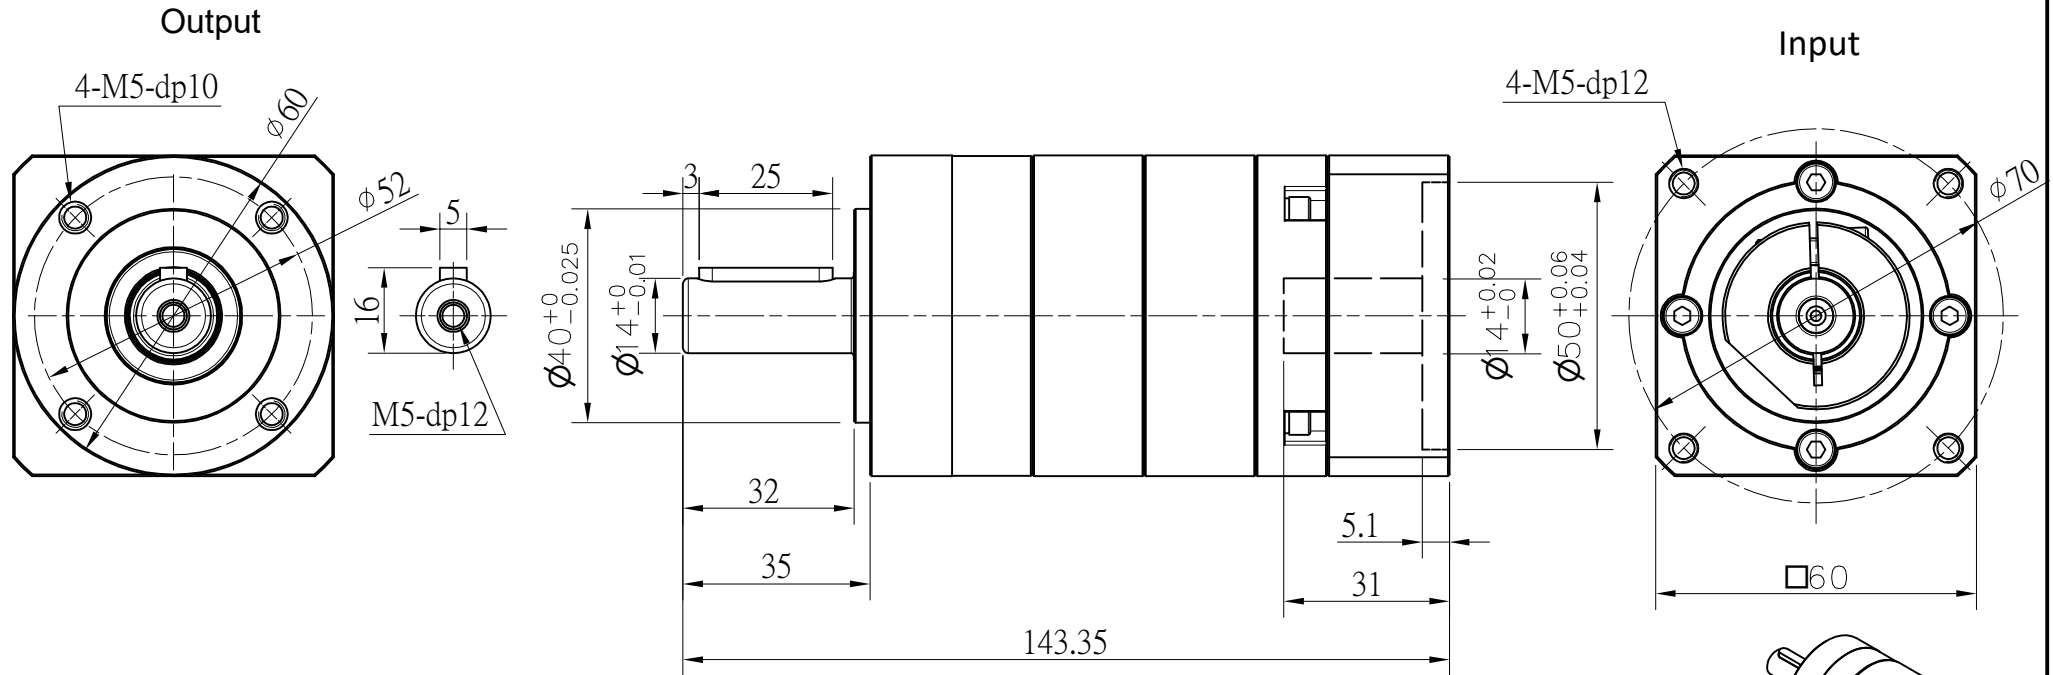

Transmission Ratio	(<u> A</u>):1	Mass Moments Of Inertia	(\)Kg.cm ²										
Rated Output Torque	(<u> C</u>)Nm	Max Output Torque	(<u> D</u>)Nm	25	49	147	Sign/Date						
Rated Input Speed	3000rpm	Max Input Speed	\	20	41	123		100	33	99			
Max Radial Force	\	Max Axial Force	\	16	41	123		70	41	123			
Efficiency	≥ 94%	Operating Temperature	-20~+90°	15	45	135		50	49	147			
Mounting Position	Any	Lubrication Method	Synthetic grease	12	45	135		35	41	123			
Weight ±3%	\	Service Life	20000h	9	45	135	30	33	99				
Standard Backlash	≤ 10 arcmin	Protection Class	IP65	Ratio	A	B	C	D	Ratio	A	B	C	D
Motor Power	-- KW	Noise Level	63dB	Note					Precision Planetary Reducer	GAE060			
Motor Dimensions				Mark	No.	Sign	Date			GAE060-L2-A1			
										Shaft Type	Precision		

Above specifications are for standard reducer and may be subject to change without notice.