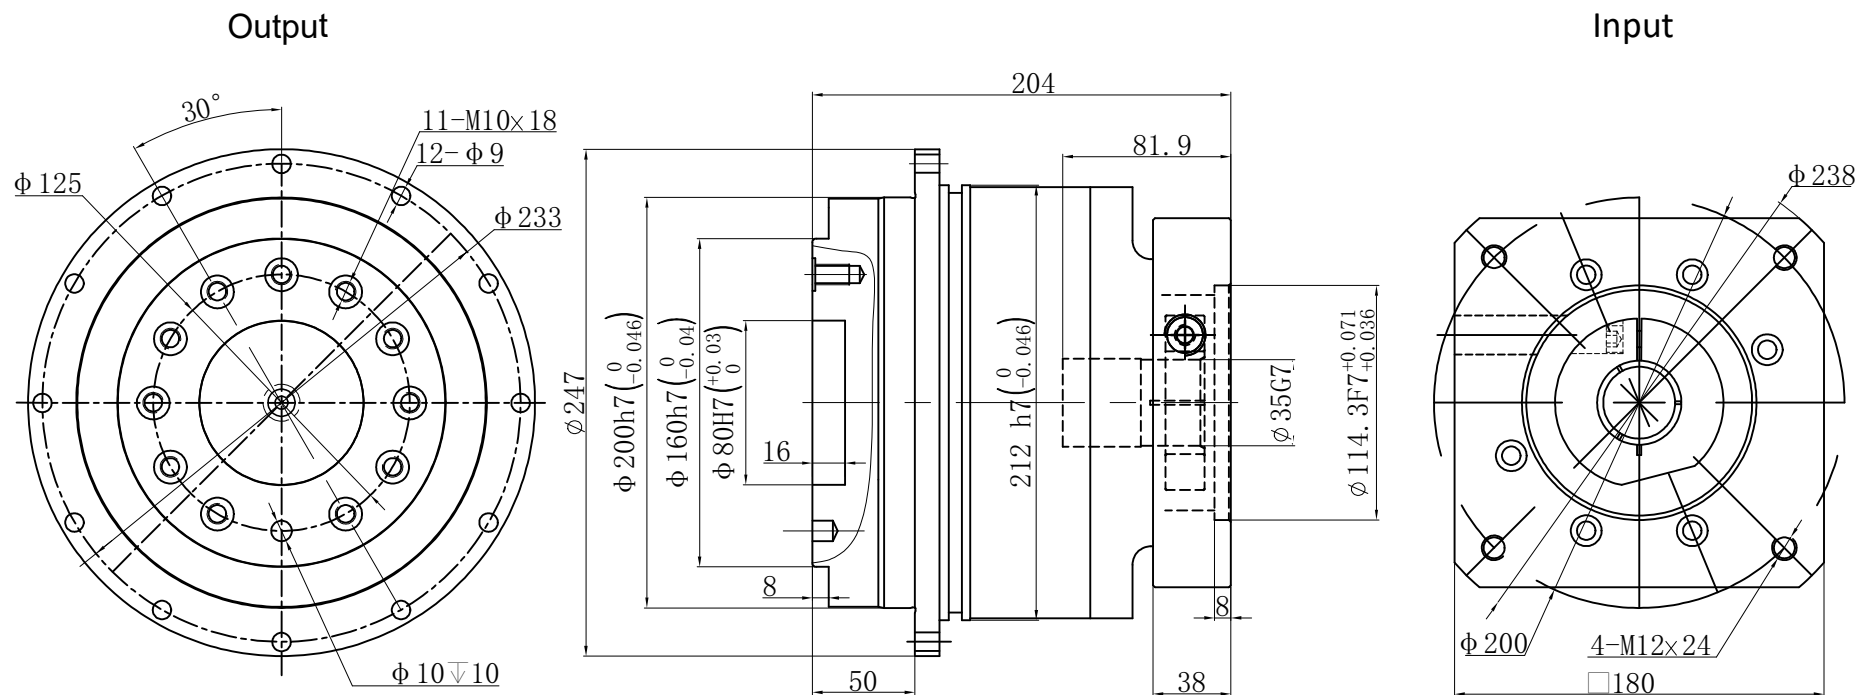





Customer Name:



Transmission Ratio	( <u>  A  </u> ):1	Mass Moments Of Inertia	( <u>  B  </u> )Kg.cm <sup>2</sup>												
Rated Output Torque	( <u>  C  </u> )Nm	Max Output Torque	( <u>  D  </u> )Nm												
Rated Input Speed	3000rpm	Max Input Speed	6000rpm		10	22.51	900	1620	Sign/Date						
					7	22.48	1100	1980							
Max Bending Moment	3064Nm	Max Axial Force	16660N		5	23.29	1200	2160							
					4	25.03	1050	1890							
Efficiency	≥ 97%	Operating Temperature	-20°~+90°	Ratio	A	B	C	D		Ratio	A	B	C	D	
Mounting Position	Any	Lubrication Method	Synthetic grease	Note					Precision Planetary Reducer	GD200					
Weight ±3%	35.1Kg	Service Life	30000h		Mark	No.	Sign	Date		GD200-L1					
Standard Backlash	≤ 5 arcmin	Protection Class	IP65												
Motor Power	-- KW	Noise Level	67dB			DRAW					Shaft Type	Precision			
						CHEC									
						APPR									
Motor Dimensions					RULE										

Above specifications are for standard reducer and may be subject to change without notice.