
Customer name:

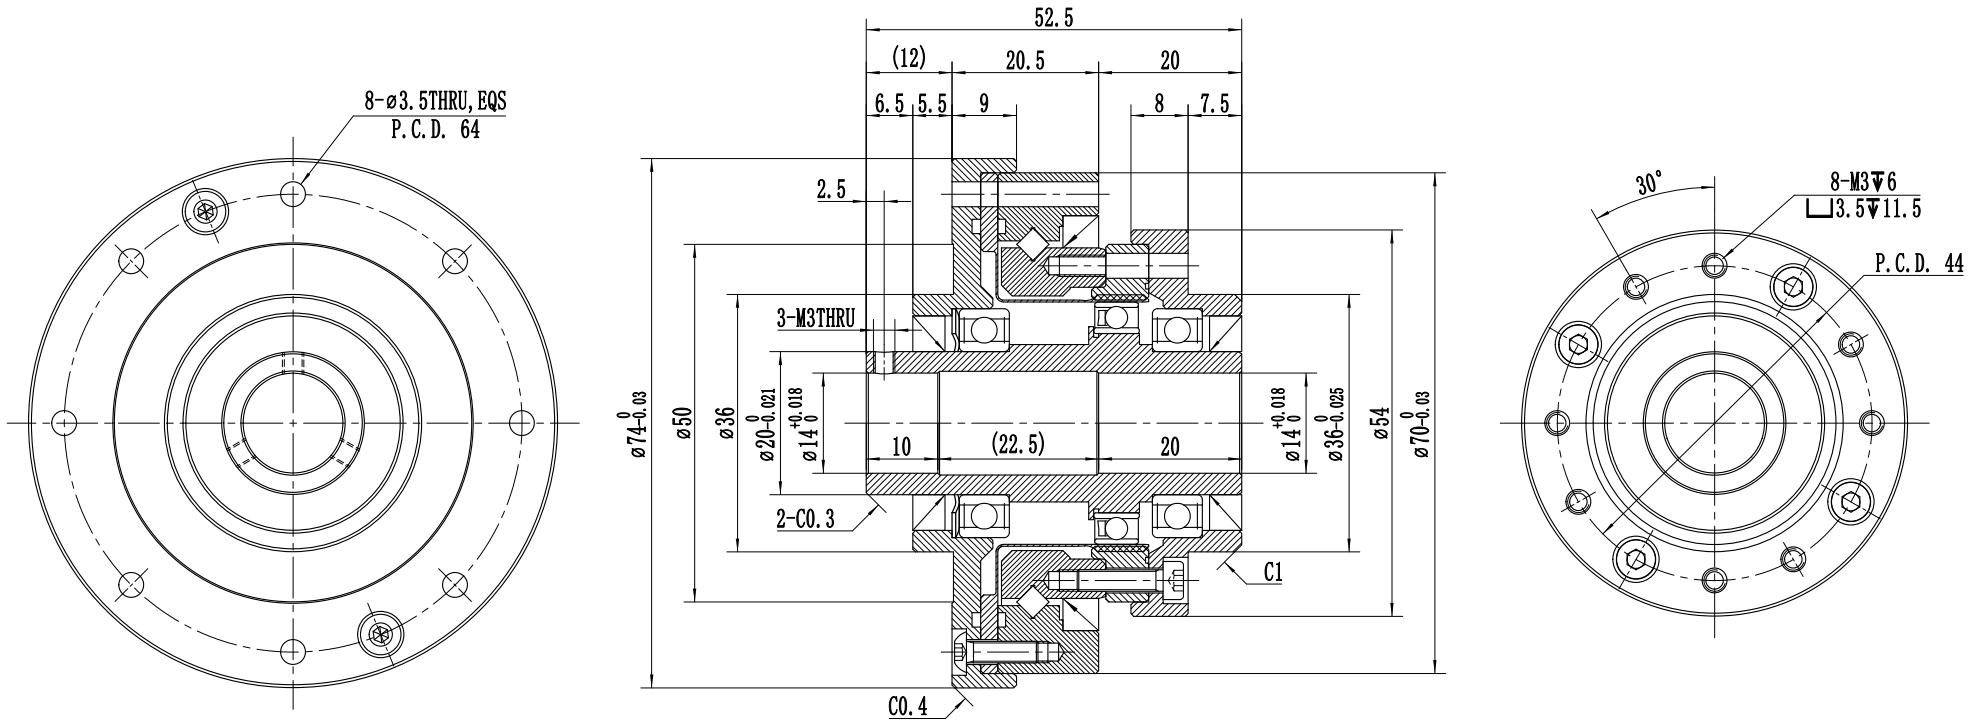

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed (r/min)	Permissible ave. input rotational speed (r/min)
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	Grease lubricant	Grease lubricant
14	50	7.0	0.7	23	2.3	9	0.9	46	4.7	8500	3500
	80	10	1.0	30	3.1	14	1.4	61	6.2		
	100	10	1.0	36	3.7	14	1.4	70	7.2		

Mark	No.	Sign	Date
Third-angle projection	DRAW		
	CHEC		
	APPR		
	RULE		

Harmonic gear reducers

TMHG14-WK

TMHG14-XXXWK

14-3*M3-74-52.5

Shafe Type	Precision

Above specifications are for standard reducer and may be subject to change without notice.