



Customer name:

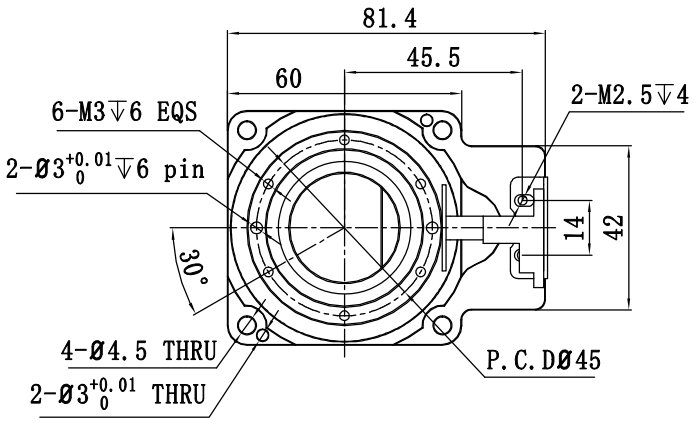

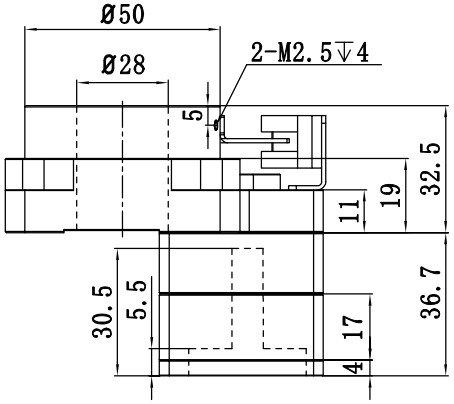

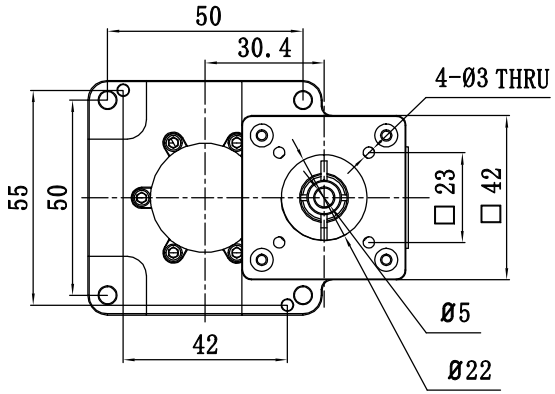

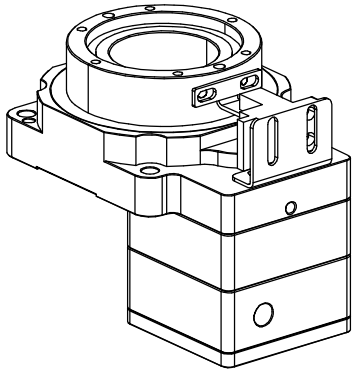

Allowable torque N.m	4	Bearing type	Cross roller bearing
Allowable disk output speed rpm	200	Positioning accuracy arcmin	⩽1
Allowable axial load N	280	Repeat positioning accuracy arcsec	⩽15
Allowable momentof inertia load N.m	6	Concentricity of rotating platform	±0.01
Moment of inertia $kg.m^2$	$4500x10^{-7}$	Mounting parallelism	±0.01
Service life H	20000	Output runout	±0.02
Weight kg	0.6	Protection class	IP40

Sign/Date

NOTE

Ø8-Ø5

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

Precision Planetary Reducer

GMN060

GMN060-10

Shaft Type	Precision