


Customer name:

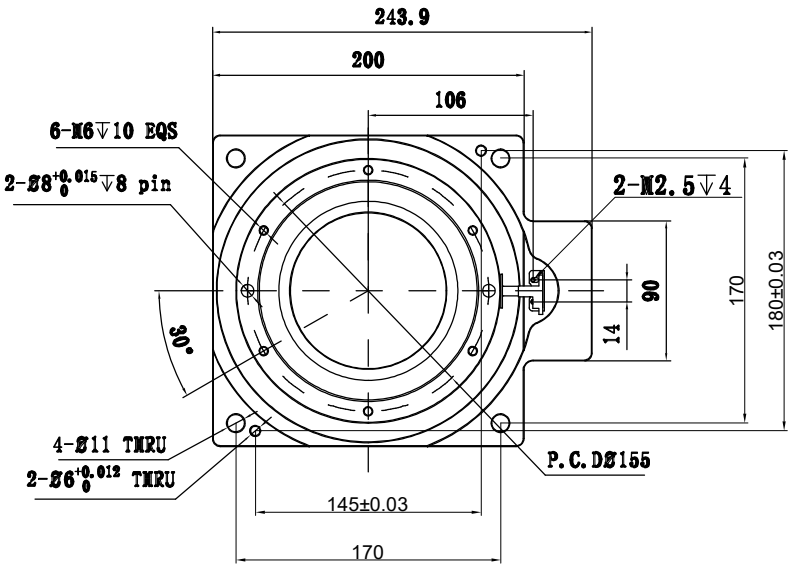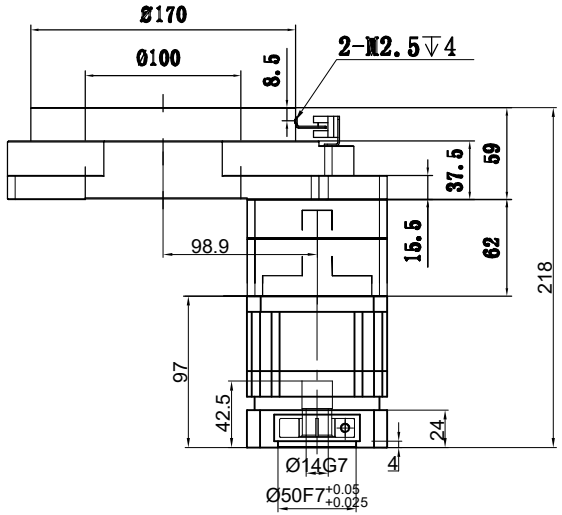


A

| | | | |
|---|---|---|---|
| Allowable torque N.m | 60 | Bearing type | Cross roller bearing |
| Allowable disk output speed rpm | 200 | Positioning accuracy arcmin | 1 |
| Allowable axial load N | 4000 | Repeat positioning accuracy arcsec | ±10 |
| Allowable momentof inertia load N.m | 216 | Concentricity of rotating platform | ±0.01 |
| Moment of inertia $kg.m^2$ | $876410x10^{-7}$ | Mounting parallelism | ±0.01 |
| Service life H | 20000 | Output runout | ±0.02 |
| Weight kg | 11.6 | Protection class | IP40 |

Sign/Date

NOTE

| Mark | No. | Sign | Date |
|---|---|---|---|
| | | | |
| | | | |
| | | | |

| | | | |
|---|---|---|---|
| DRAW | | | |
| CHEC | | | |
| APPR | | | |
| RULE | | | |

Precision Planetary Reducer

GMN200

GMN200-100

| Shaft Type | Precision |
|---|---|
| | |