
Customer name:

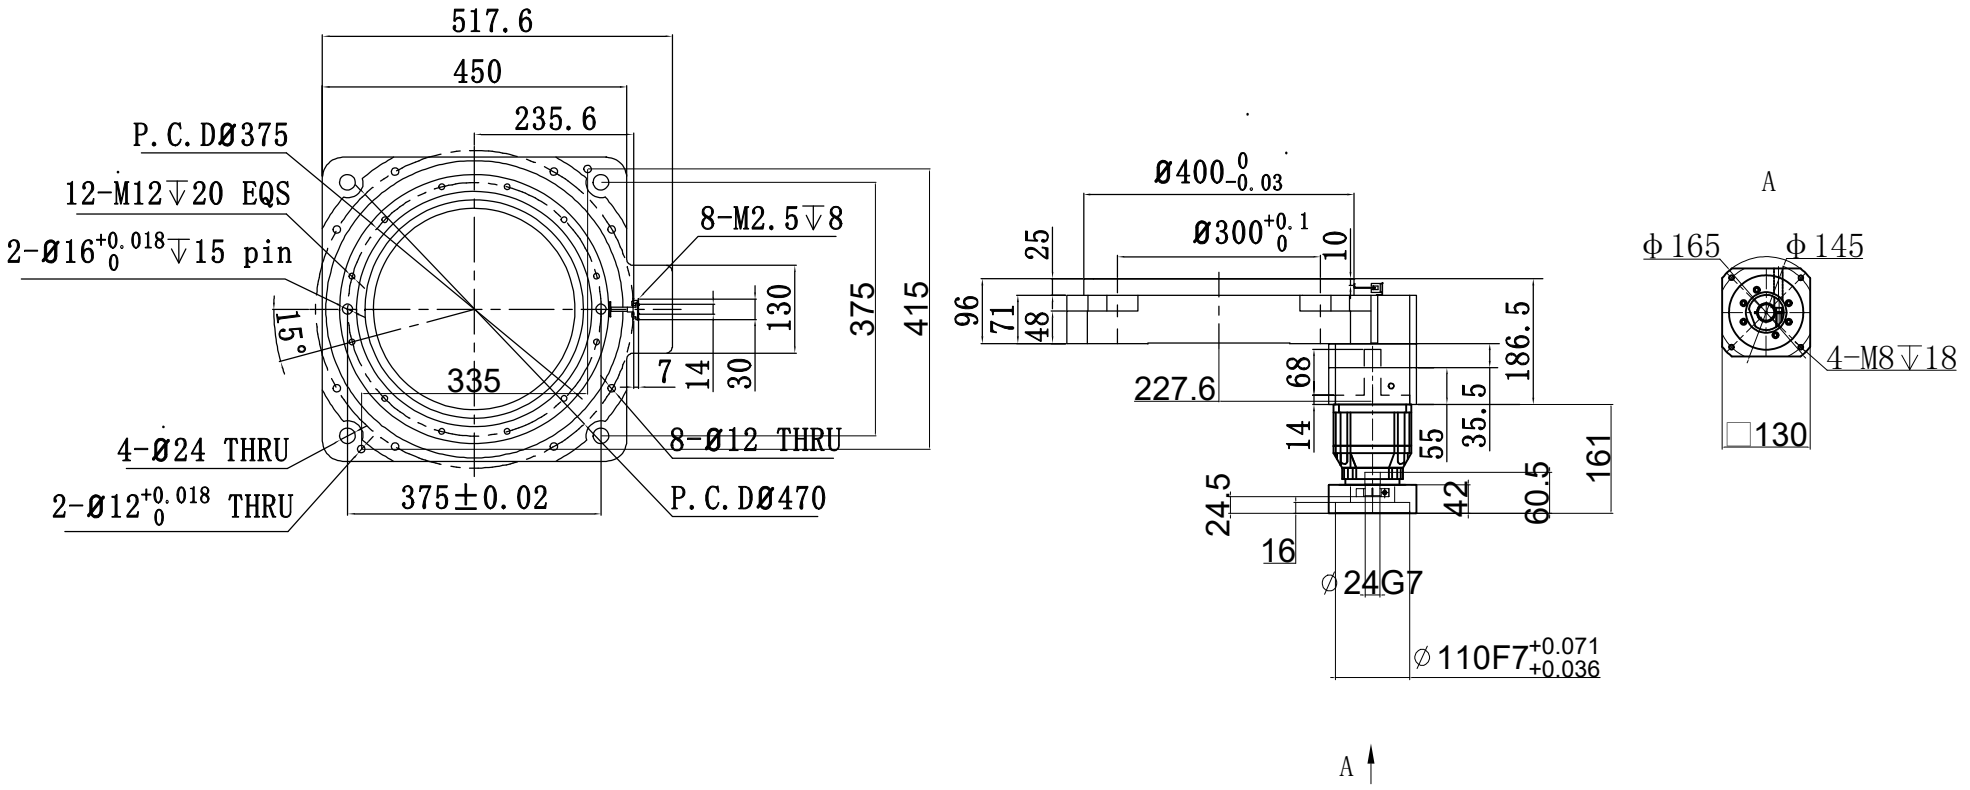

Allowable torpue	380 N.m	Bearing type	Cross roller bearing
Allowable disk output speed	200 rpm	Positioning accuracy	5 arcmin
Allowable axial load	15000 N	Repeat positioning accuracy	±10 arcsec
Allowable momentof inertia load	490 N.m	Concentricity of rotating platform	±0.01
Moment of inertia	876410x10^{-7}kg.m^2	Mounting parallelism	±0.01
Service life	20000 H	Output runout	±0.02
Weight	56.5 kg	Protection class	IP40

Sign/Date

NOTE

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

Precision Planetary Reducer

GMNB450

GMNB450-70

Shaft Type	Precision

(Above specification are for standard reducer, No standard reducer only for reference)