



Customer name:

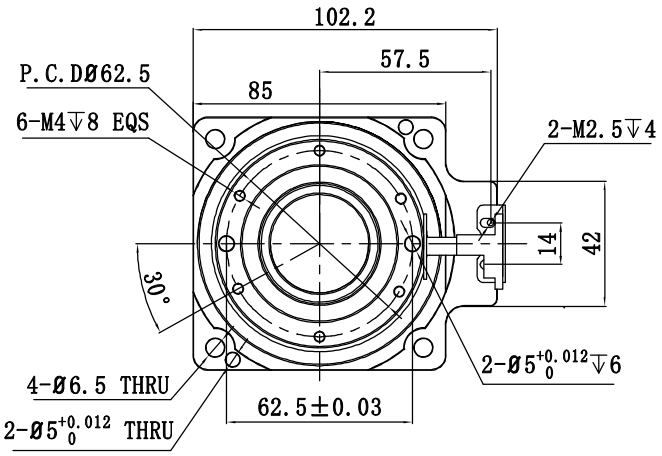

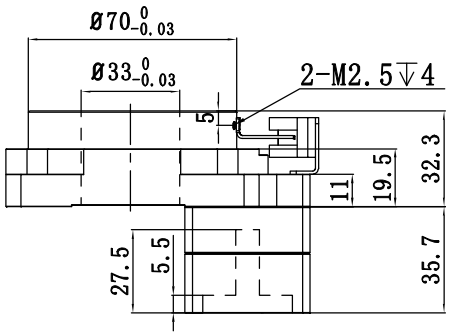

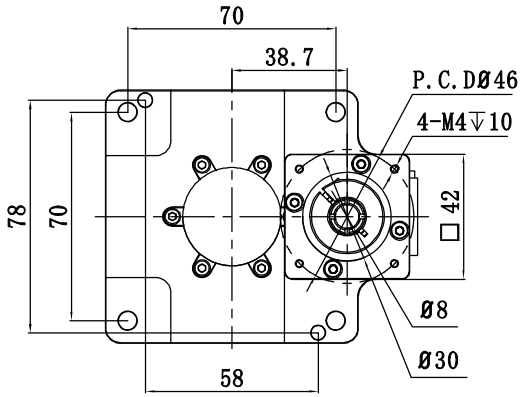

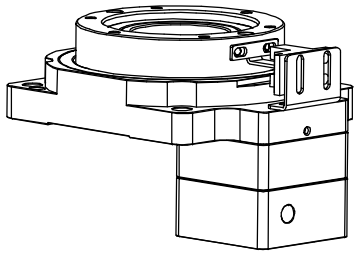

Allowable torque N.m	12	Bearing type	Cross roller bearing
Allowable disk output speed rpm	200	Positioning accuracy arcmin	1
Allowable axial load N	500	Repeat positioning accuracy arcsec	±15
Allowable momentof inertia load N.m	20	Concentricity of rotating platform	±0.01
Moment of inertia $kg.m^2$	$21090x10^{-7}$	Mounting parallelism	±0.01
Service life H	20000	Output runout	±0.02
Weight kg	1.2	Protection class	IP40

Sign/Date

NOTE

Mark	No.	Sign	Date

DRAW			
CHEC			
APPR			
RULE			

Precision Planetary Reducer

GMN085

GMN085-18

Shaft Type	Precision