Customer name:

Output

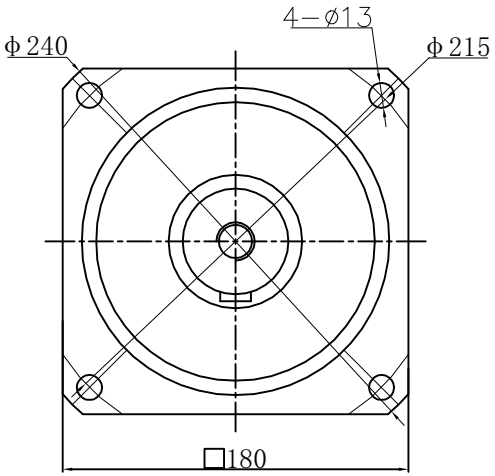

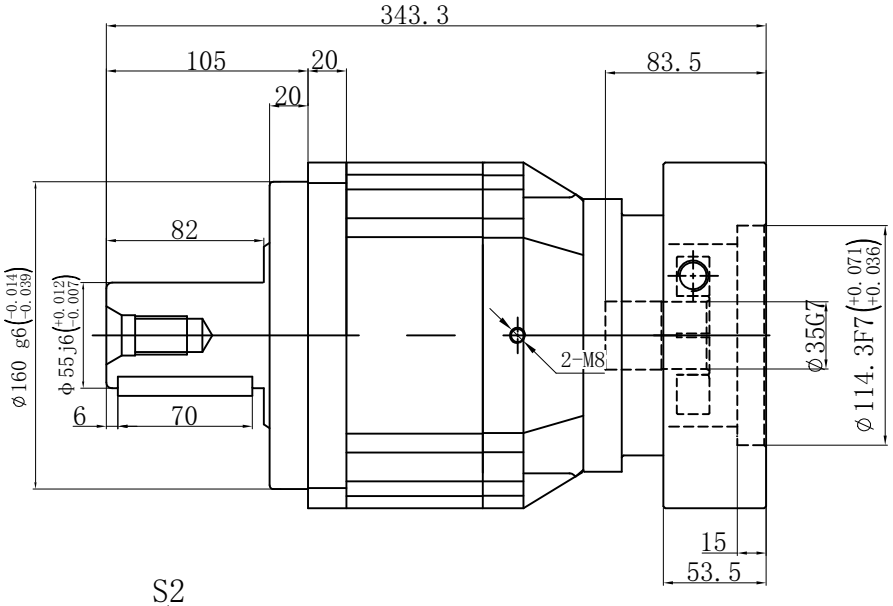

Input

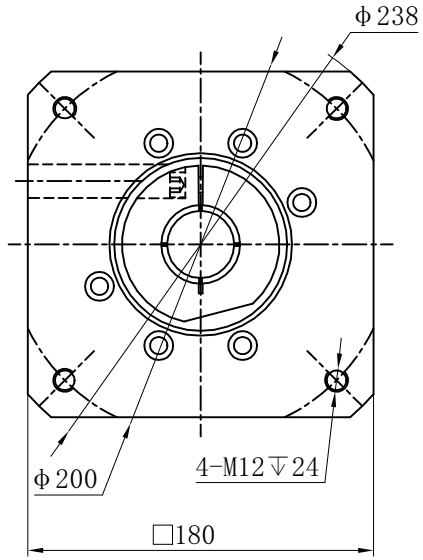

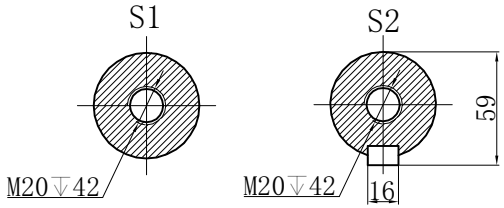

Transmission ratio	(A):1	Mass moments of inertia	(B)Kg.cm^2
Rated output torque	(C)Nm	Max.output torque	(D)Nm
Rated input speed	3000rpm	Max input speed	6000rpm
Max.radial force	14500N	Max.axial force	7250N
Efficiency	≥ 94%	Operating temperature	-20°~+90°
Mounting position	Any	Lubrication method	Synthetic grease
Weight ±3%	33Kg	Service life	20000h
Standard backlash	≤ 7 arcmin	Protection class	IP65
Motor power		Noise level	67dB
Motor dimensions			

Ratio	A	B	C	D
	40	7.42	1000	1800
	35	7.42	1100	1980
	30	7.42	1100	1980
	25	7.42	1200	2160
	20	7.42	1050	1890
	15	7.42	588	1058

Sign/Date

Ratio	A	B	C	D
	100	2.57	900	1620
	80	2.57	1000	1800
	70	2.57	1100	1980
	60	2.57	1100	1980
	50	2.57	1200	2160

Note

Mark	No.	Sign	Date
DRAW			
CHEC			
APPR			
RULE			

Precision planetary reducer

GB180

GB180-L2

Shaft Type	Precision

Above specifications are for standard reducer and may be subject to change without notice.