
Customer Name:

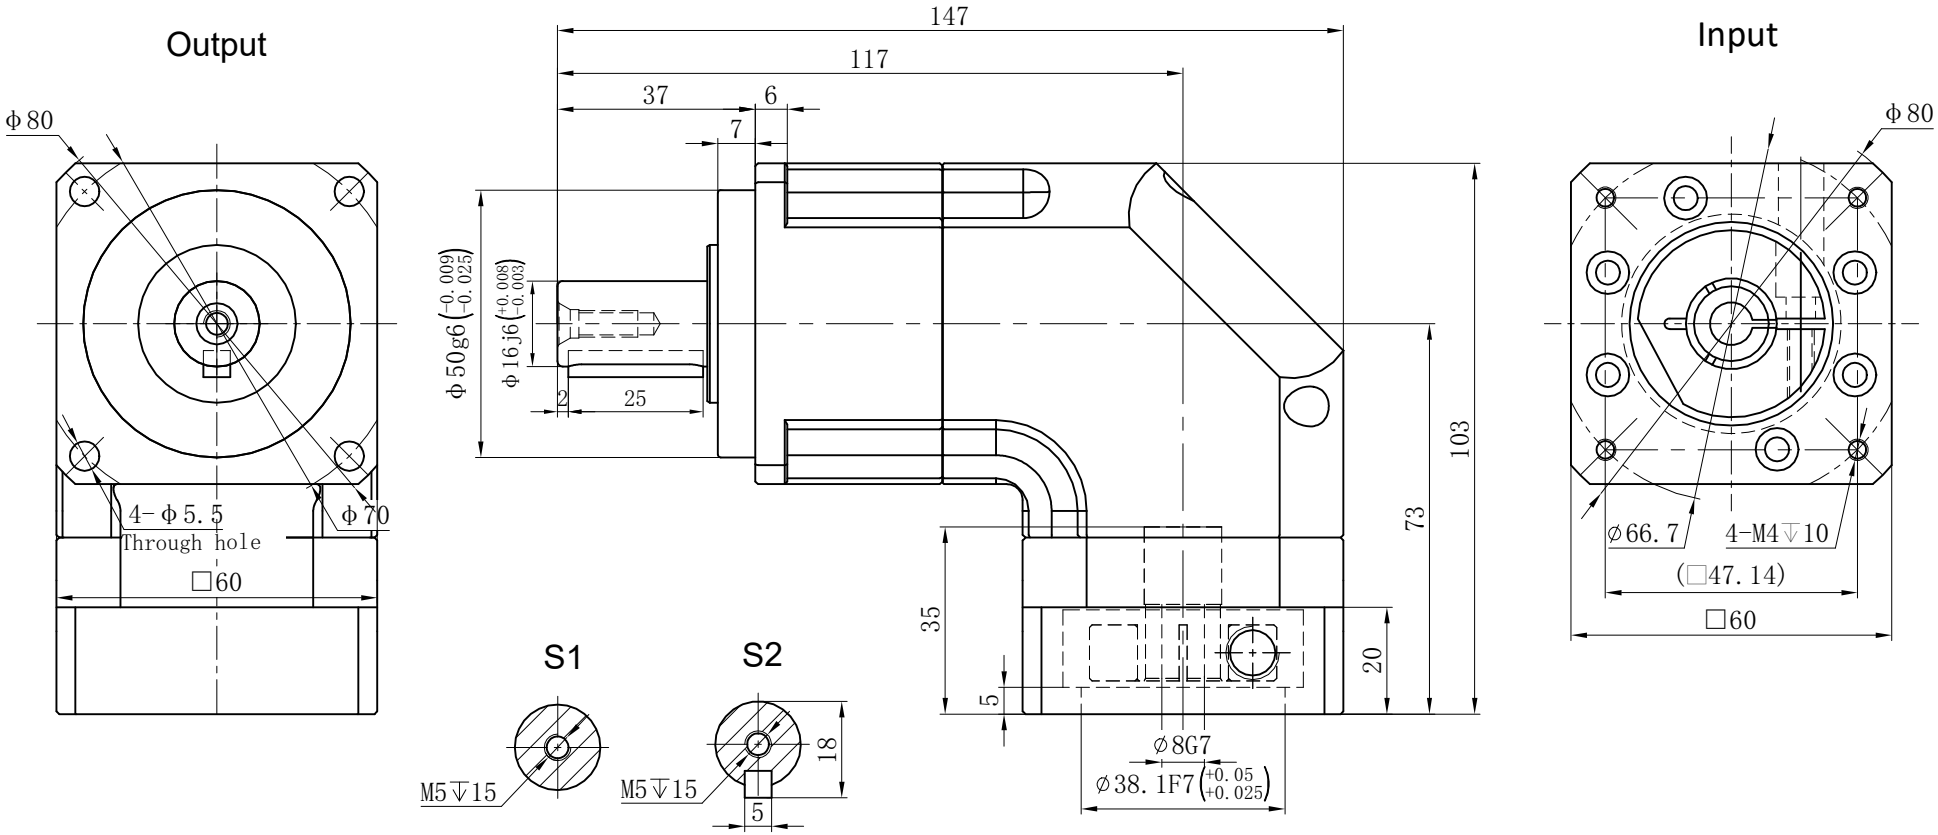

Transmission Ratio	(A):1
Rated Output Torque	(C)Nm
Rated Input Speed	5000rpm
Max Radial Force	1530N
Efficiency	≥ 95%
Mounting Position	Any
Weight ±3%	2Kg
Standard Backlash	≤ 6 arcmin
Motor Power	-- KW
Motor Dimensions	

Mass Moments Of Inertia	(B)Kg.cm^2
Max Output Torque	(D)Nm
Max Input Speed	10000rpm
Max Axial Force	765N
Operating Temperature	-20°~+90°
Lubrication Method	Synthetic grease
Service Life	20000h
Protection Class	IP65
Noise Level	63dB

	3	0.35	36	64.8	Sign/Date		4	0.35	48	86.4
	5	0.35	60	108			6	0.35	55	99
	7	0.35	50	90			8	0.35	45	81
	10	0.35	40	72			12	0.07	55	99
	14	0.07	42	75.6			16	0.07	45	81
	20	0.07	40	72						
Ratio	A	B	C	D		Ratio	A	B	C	D

Note

φ14 to φ8

Mark	No.	Sign	Date
DRAW			
CHEC			
APPR			
RULE			

Precision Planetary Reducer

GBR060

GBR060-L1

Shaft Type	Precision

Above specifications are for standard reducer and may be subject to change without notice.