Customer name:

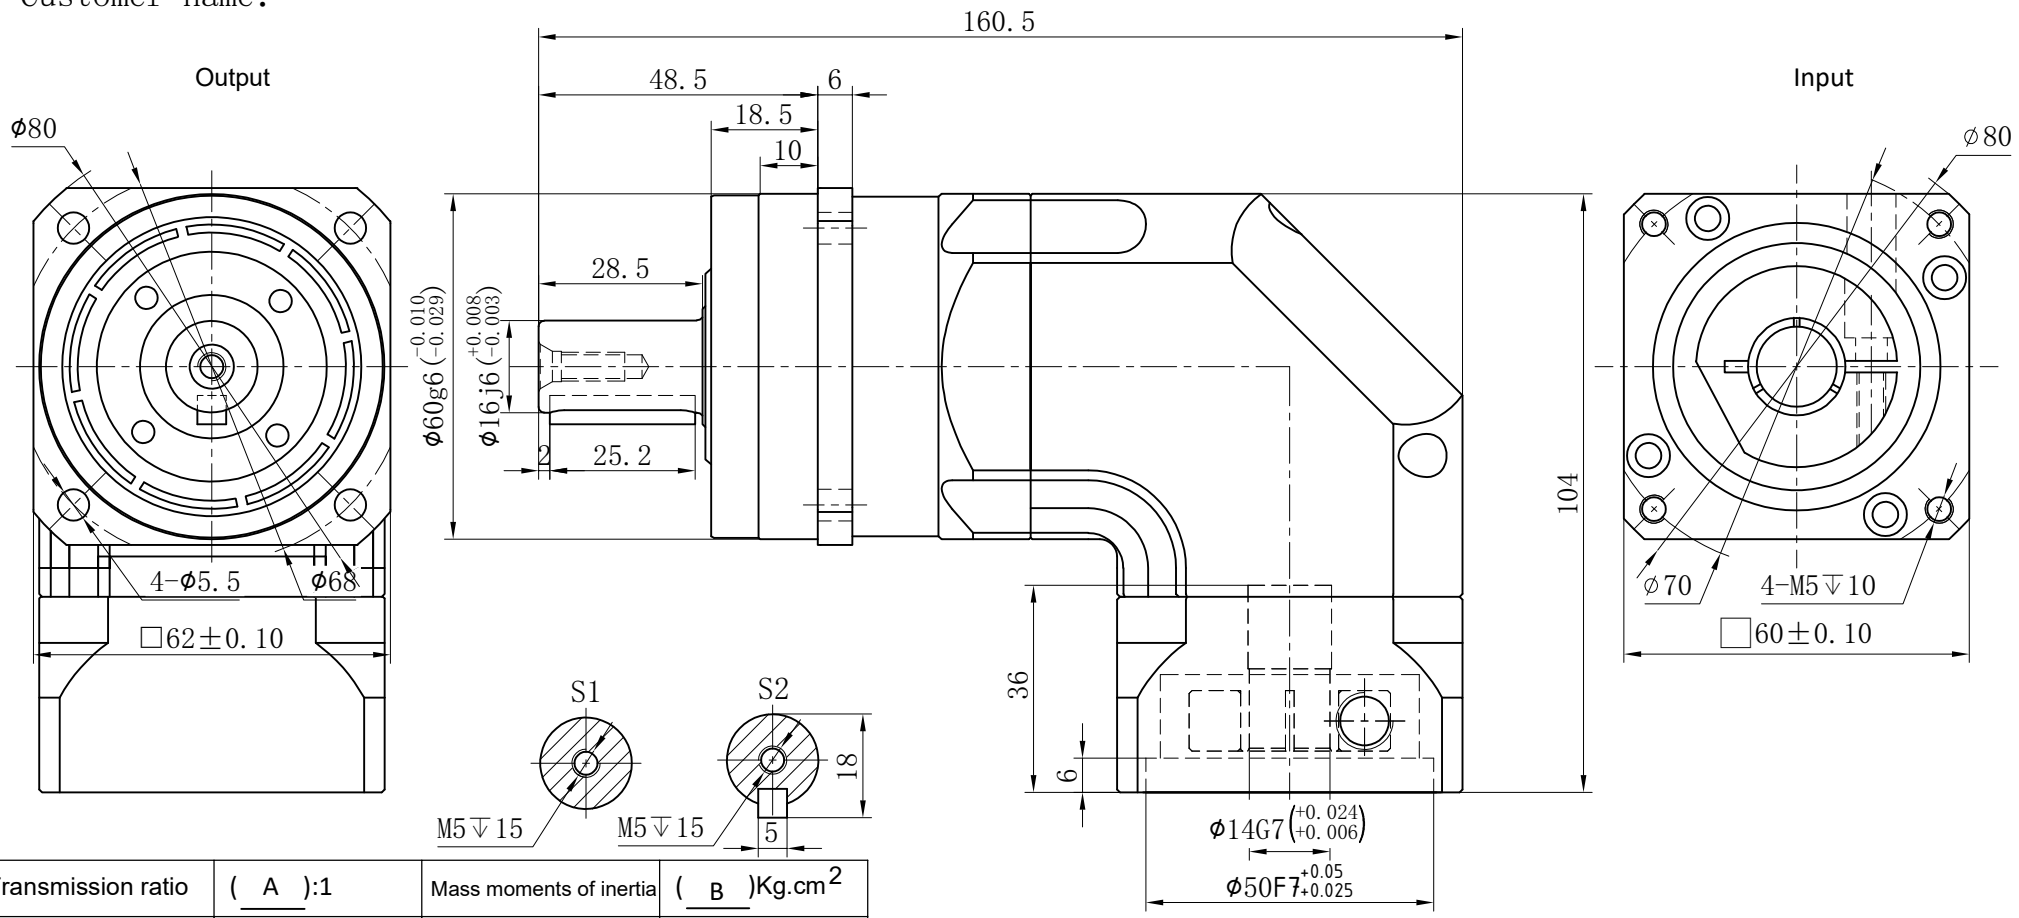

Transmission ratio	(A):1	Mass moments of inertia	(B)Kg.cm^2
Rated output torque	(C)Nm	Max.output torque	(D)Nm
Rated input speed	3000rpm	Max input speed	6000rpm
Max.radial force	1400N	Max.axial force	1100N
Efficiency	≥ 95%	Operating temperature	-20°~+90°
Mounting position	Any	Lubrication method	Synthetic grease
Weight ±3%	--Kg	Service life	20000h
Standard backlash	≤ 6 arcmin	Protection class	IP65
Motor power		Noise level	63dB
Motor dimensions			

Ratio	A	B	C	D
	4	0.35	48	86
	5	0.35	60	108
	6	0.35	55	99
	7	0.35	50	90
	8	0.35	45	81

Sign/Date

Ratio	A	B	C	D
	10	0.35	40	72
	12	0.07	55	99
	14	0.07	42	75
	16	0.07	45	81
	20	0.07	40	72

Note

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

Precision planetary reducer

GFR060

GFR060-L1

Shaft Type	Precision

Above specifications are for standard reducer and may be subject to change without notice.