



Customer Name:

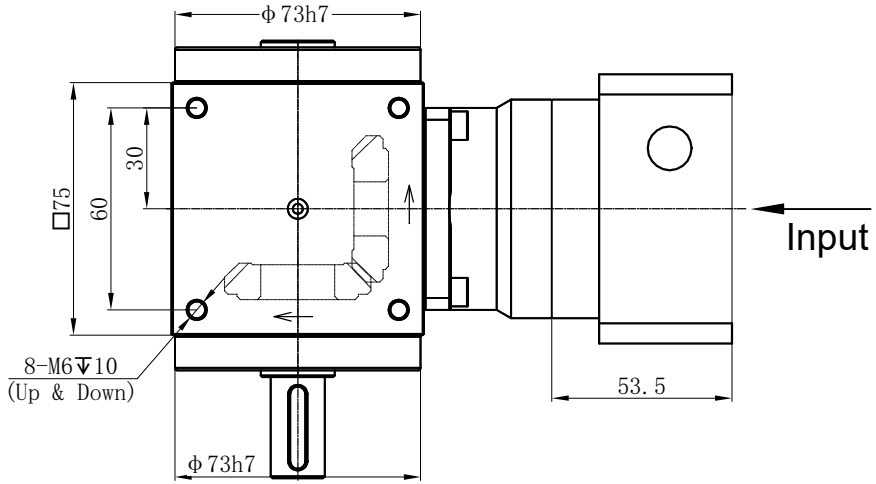

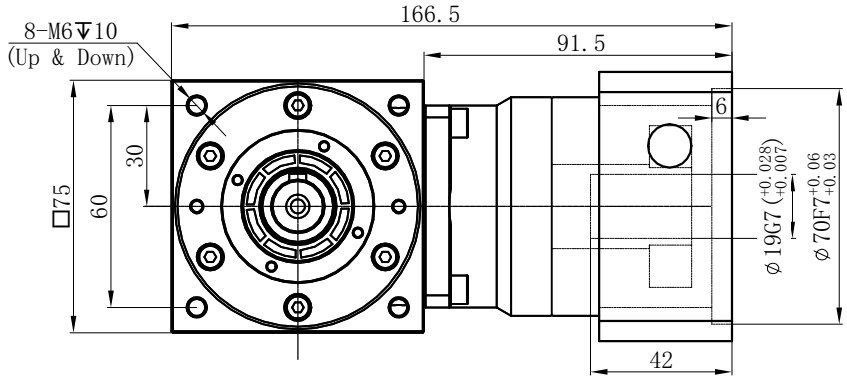

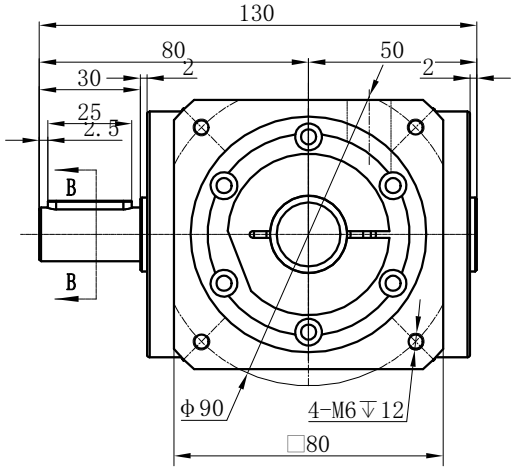



B-B SECTION

Transmission Ratio	1:A		
Nominal output torque	B Nm	Mass Moments Of Inertia	0.15 Kg.cm^2
Rated Input Speed	3000 rpm	Max Acceleration Torque	C Nm
Max.Radial Load	2400 N	Max Acceleration Input Speed	6000 rpm
Efficiency	≥ 94%	Max.Axial Load	1200 N
Weight ±3%	-- Kg	Operating Temperature	-20° ~ +90°
Standard Backlash	P0 ≤ 4 arcmin	Service Life	20000 h
	P1 ≤ 7 arcmin	Noise Level	≤ 69 dB
	P2 ≤ 10 arcmin		

	10	35	52.5	Sign/Date
	7	45	67.5	
	5	45	67.5	
	4	45	67.5	
	3	40	60	
Choose	A	B	C	

Note

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

High Precision Spieal Bevel Gearboxes

GST075

GST075-RSTL-L1/060

Shaft Type	Precision

(Above specification are for standard reducer, No standard reducer only for reference)