

Customer Name:

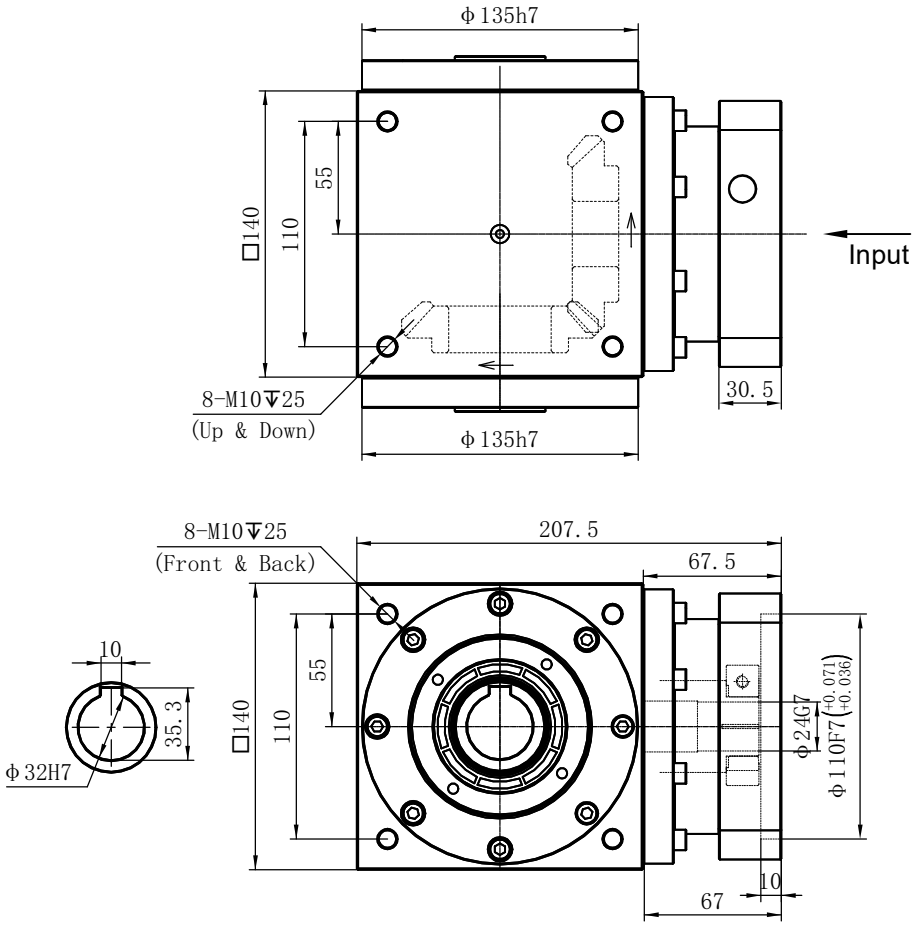

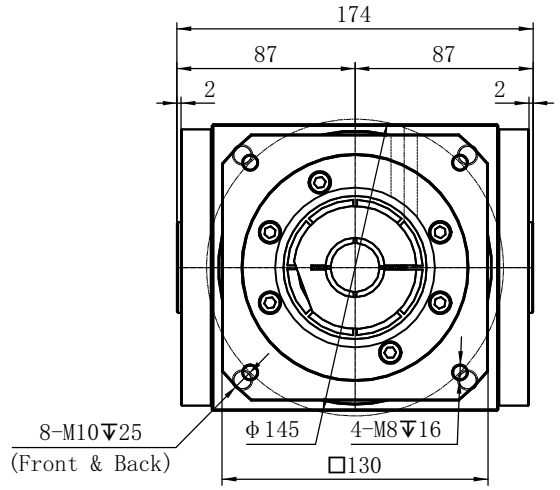

Transmission Ratio	1:1			
Nominal output torque	360 Nm		Mass Moments Of Inertia	36.8Kg.cm^2
Rated Input Speed	2500 rpm		Max Acceleration Torque	540 Nm
Max.Radial Load	6500 N		Max Acceleration Input Speed	3500 rpm
Efficiency	≥ 98%		Max.Axial Load	3250 N
Weight ±3%	-- Kg		Operating Temperature	-20° ~ +90°
Standard Backlash	P0	≤ 3 arcmin	Service Life	20000 h
	P1	≤ 6 arcmin	Noise Level	≤ 74 dB
	P2	≤ 9 arcmin		

Note

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

High Precision Spieal Bevel Gearboxes

GST140

GEARKO

GST140-FOT-001

轴样式	精度等级

(Above specification are for standard reducer, No standard reducer only for reference)