
客户名称：Customer Name：

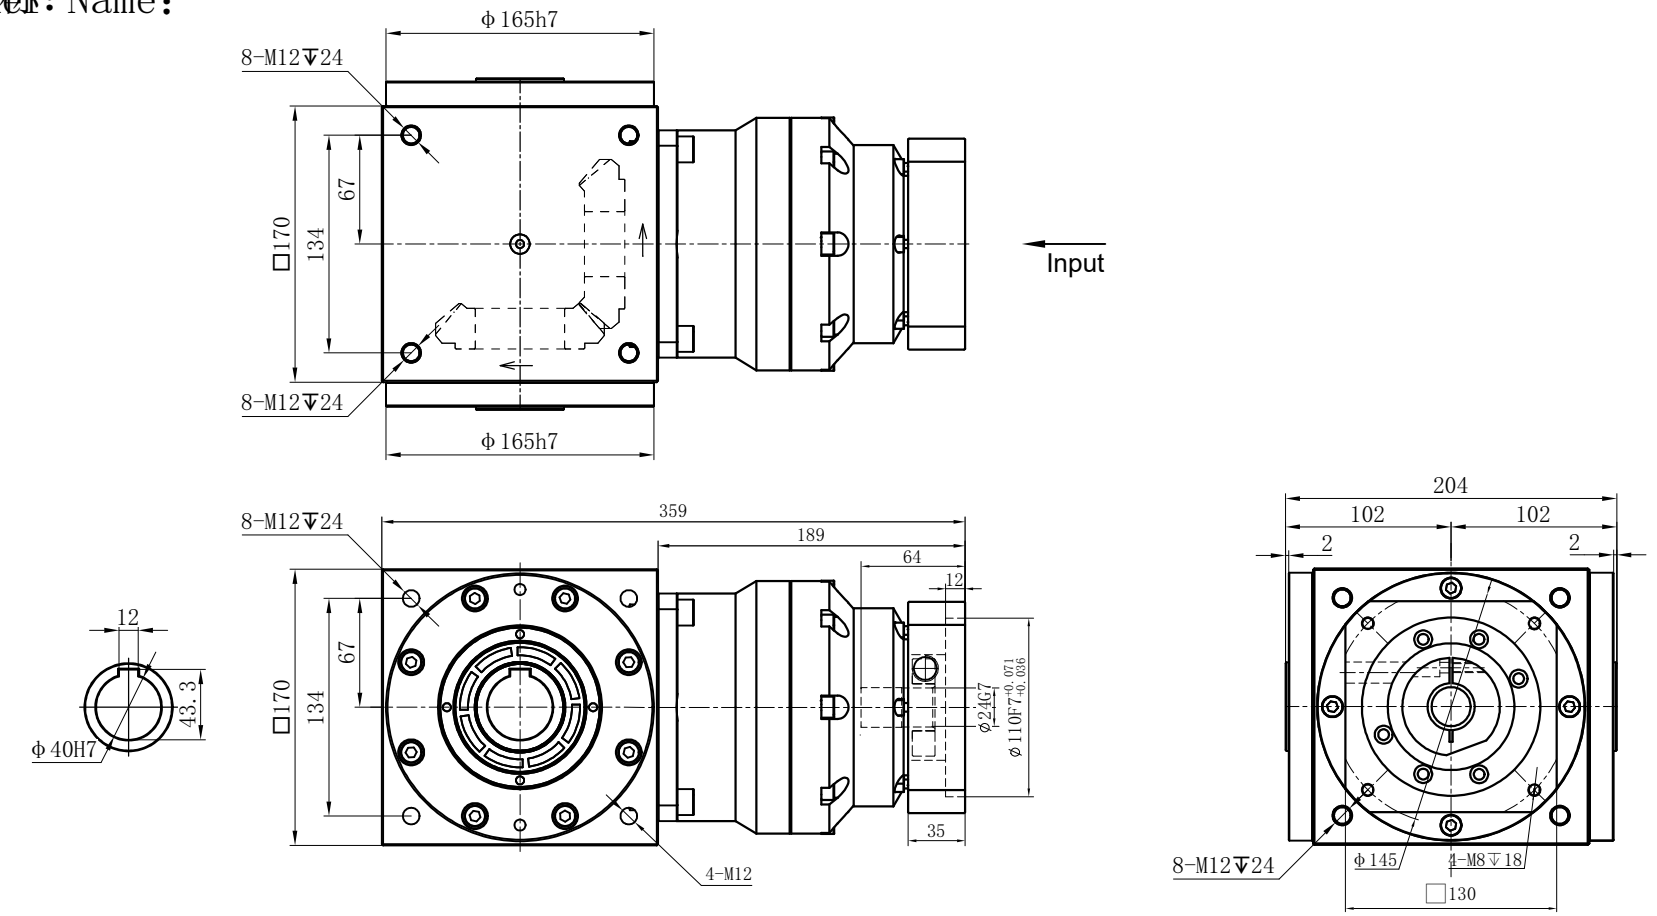

Transmission Ratio	1:70				
Nominal output torque	550 Nm		Mass Moments Of Inertia	3.25 Kg.cm^2	
Rated Input Speed	2000 rpm		Max Acceleration Torque	825 Nm	
Max.Radial Load	9100 N		Max Acceleration Input Speed	4000 rpm	
Efficiency	≥ 90%		Max.Axial Load	4550 N	
Weight ±3%	-- Kg		Operating Temperature	-20° ~ +90°	
Standard Backlash	P0	≤ 6 arcmin	Service Life	20000 h	
	P1	≤ 8 arcmin			
	P2	≤ 10 arcmin	Noise Level	≤ 76 dB	

Note

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

High Precision Spieal Bevel Gearboxes

GST170

GEARKO

GST170-ROT-L2

Shaft Type	Precision

(Above specification are for standard reducer, No standard reducer only for reference)