Customer name：

Output

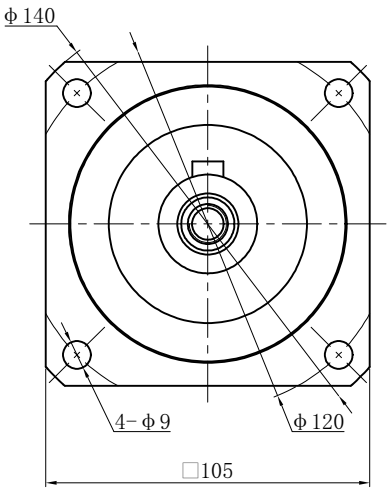

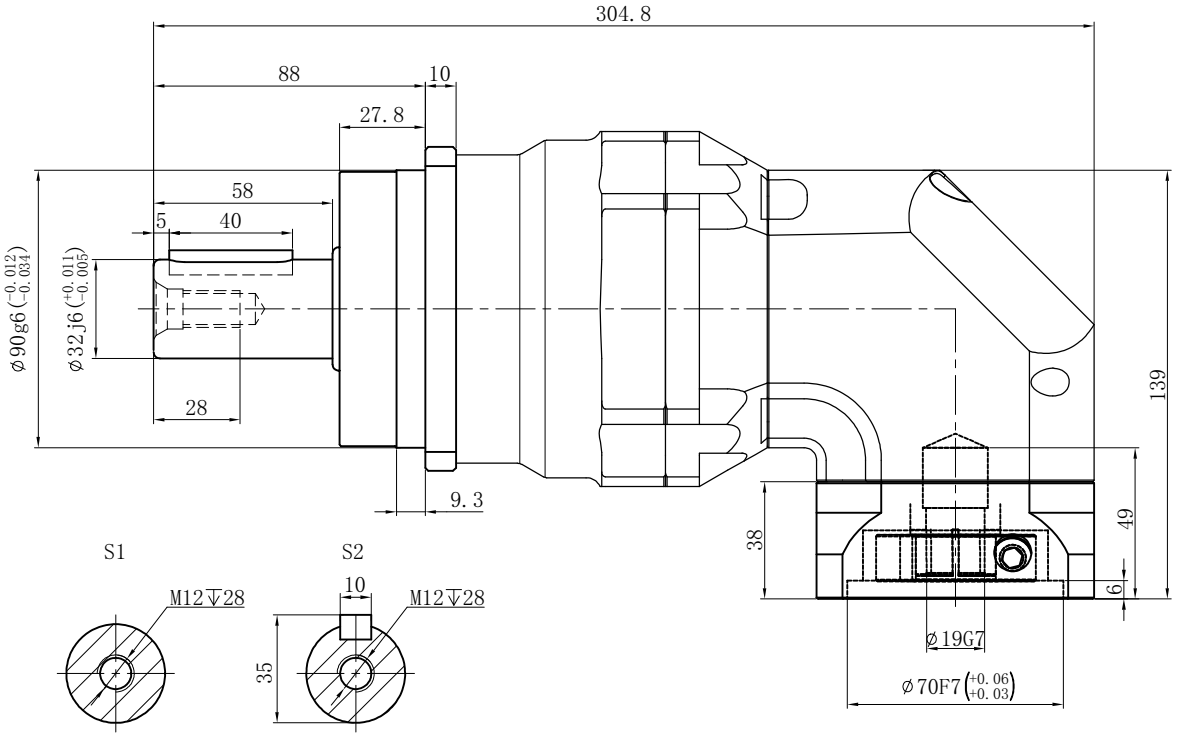

Input

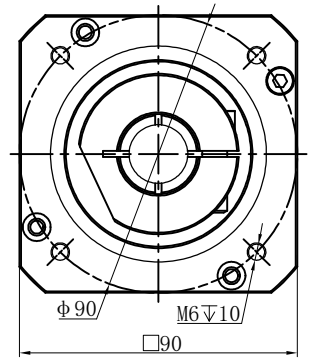

Transmission ratio	(A):1	Mass moments of inertia	(B)Kg.cm 2
Rated output torque	(C)Nm	Max.Output torque	(D)Nm
Rated input speed	4000rpm	Max input speed	8000rpm
Max.radial force	9200N	Max.axial force	5820N
Efficiency	≥ 92%	Operating temperature	-20°~+90°
Mounting position	Any	Lubrication method	Synthetic grease
Weight ±3%	-Kg	Service life	20000h
Standard backlash	≤ 9 arcmin	Protection class	IP65
Motor power		Noise level	68dB
Motor dimensions			

Ratio	A	B	C	D
	40	2.25	260	465
	35	2.25	300	540
	30	2.25	310	558
	25	2.25	320	576

Sign/Date

Ratio	A	B	C	D
	100	2.25	230	410
	80	2.25	260	465
	70	2.25	300	540
	60	2.25	310	558
	50	2.25	230	410

NOTE

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

Precision Planetary Reducer

GFR100

GFR100-L2

Shaft Type	Precision