



Customer Name:

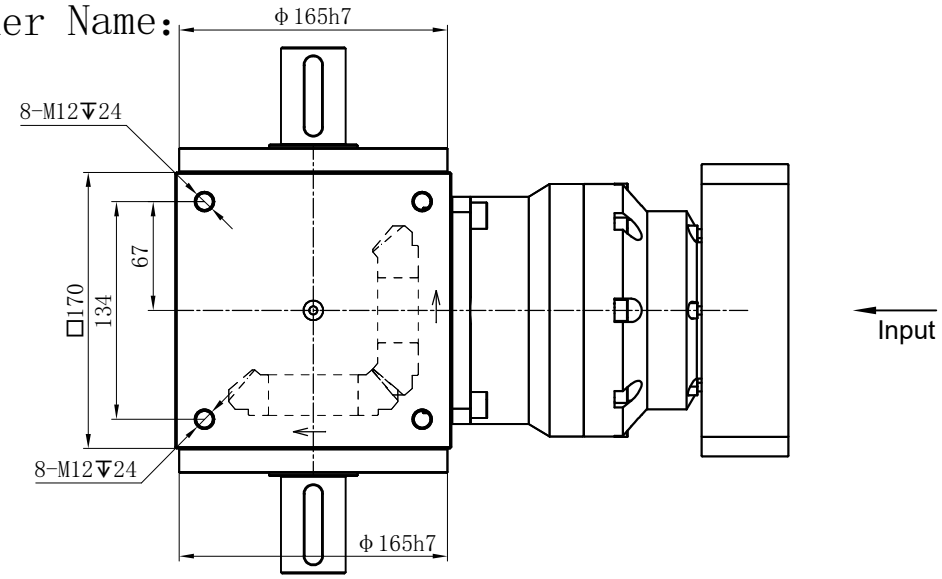

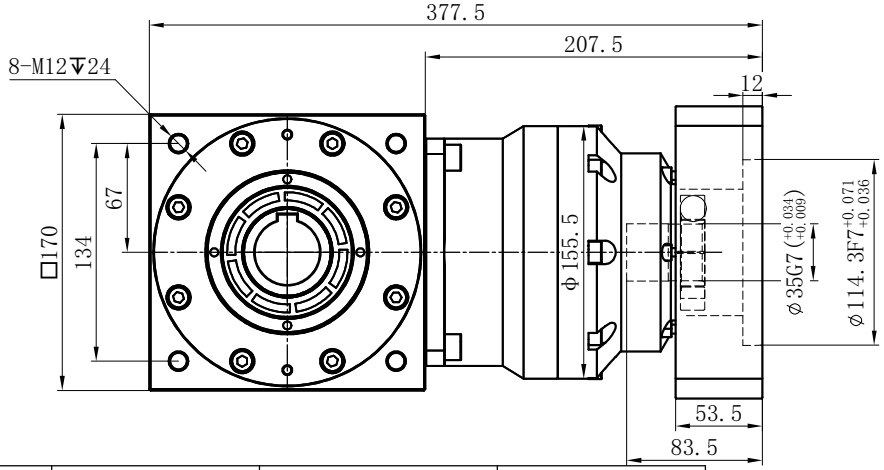

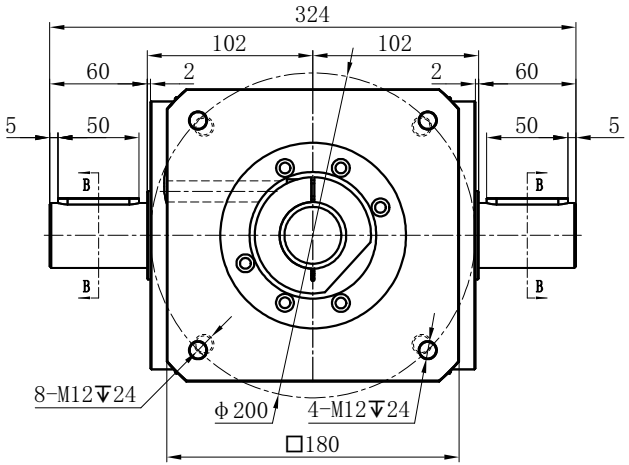



B-B SECTION

Transmission Ratio	1:20	Mass Moments Of Inertia	3.25 Kg.cm^2
Nominal output torque	376 Nm	Max Acceleration Torque	564 Nm
Rated Input Speed	2000 rpm	Max Acceleration Input Speed	4000 rpm
Max.Radial Load	9100 N	Max.Axial Load	4550 N
Efficiency	≥ 94%	Operating Temperature	-30° ~ +100°
Weight ±3%	-- Kg	Service Life	20000 h
Standard Backlash	≤ 10 arcmin	Noise Level	≤ 76 dB

Note

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

High Precision Spieal Bevel Gearboxes

GST170

GST170-RVT-L2

Shaft Type	Precision

(Above specification are for standard reducer, No standard reducer only for reference)