



Customer Name:

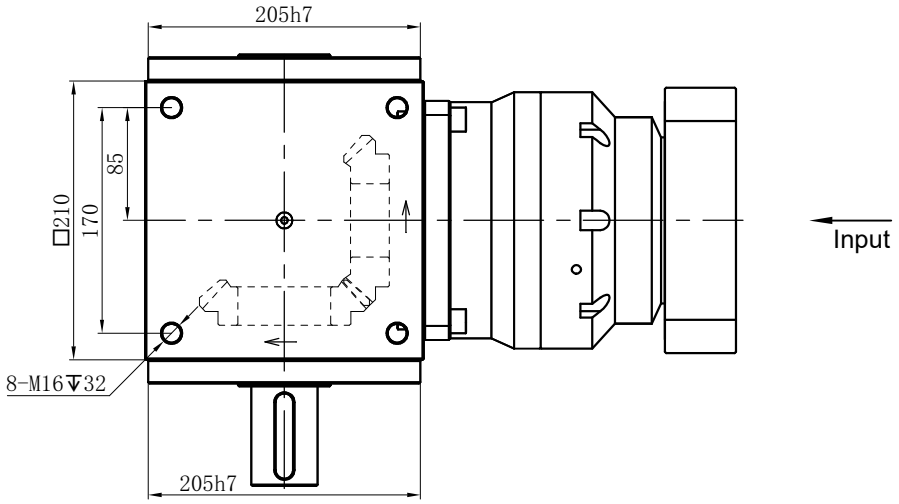

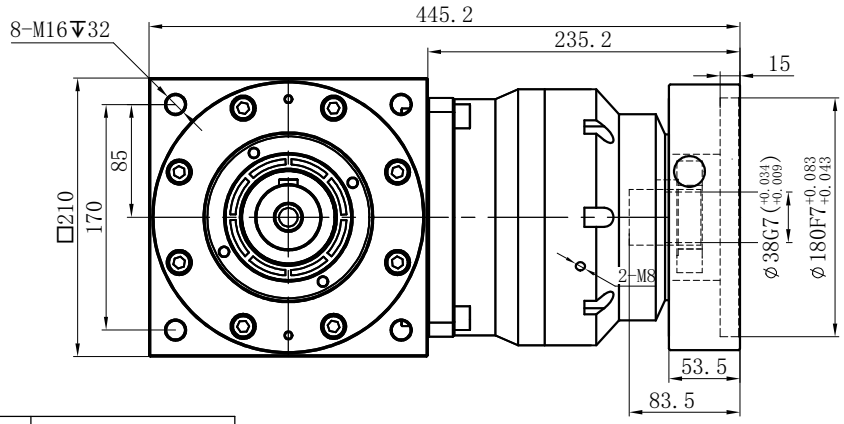

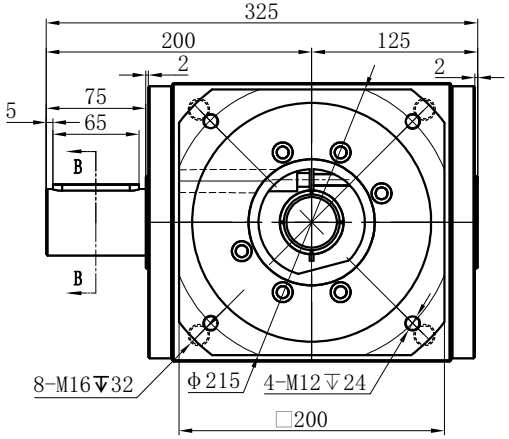



B-B SECTION

Transmission Ratio	1:15			
Nominal output torque	580 Nm	Mass Moments Of Inertia	9 Kg.cm^2	
Rated Input Speed	2000 rpm	Max Acceleration Torque	1044 Nm	
Max.Radial Load	13000 N	Max Acceleration Input Speed	4000 rpm	
Efficiency	≥ 94%	Max.Axial Load	6500 N	
Weight ±3%	-- Kg	Operating Temperature	-20° ~ +90°	
Standard Backlash	P0 ≤ 6 arcmin	Service Life	20000 h	
	P1 ≤ 8 arcmin			
	P2 ≤ 10 arcmin	Noise Level	≤ 78 dB	

Note

Mark	No.	Sign	Date
DRAW			
CHEC			
APPR			
RULE			

High Precision Spieal Bevel Gearboxes

GST210

GEARKO

GST210-RST-L2

Shaft Type	Precision

(Above specification are for standard reducer, No standard reducer only for reference)