


Customer Name:

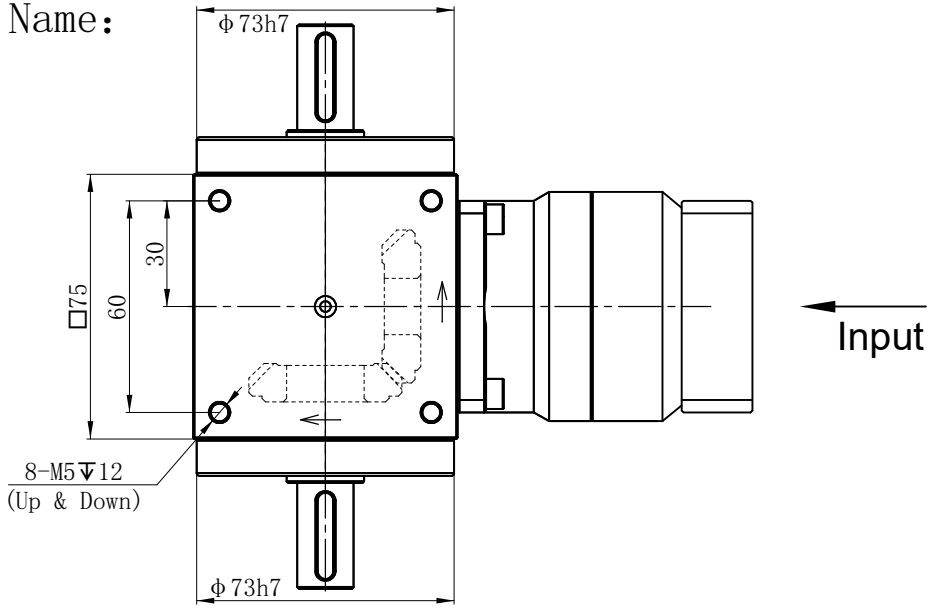

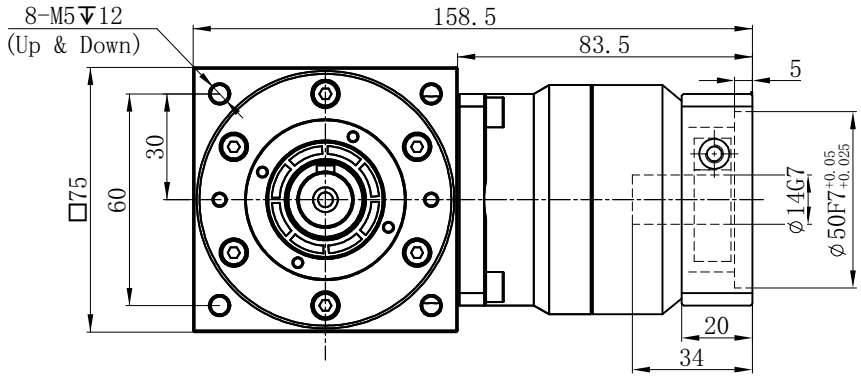

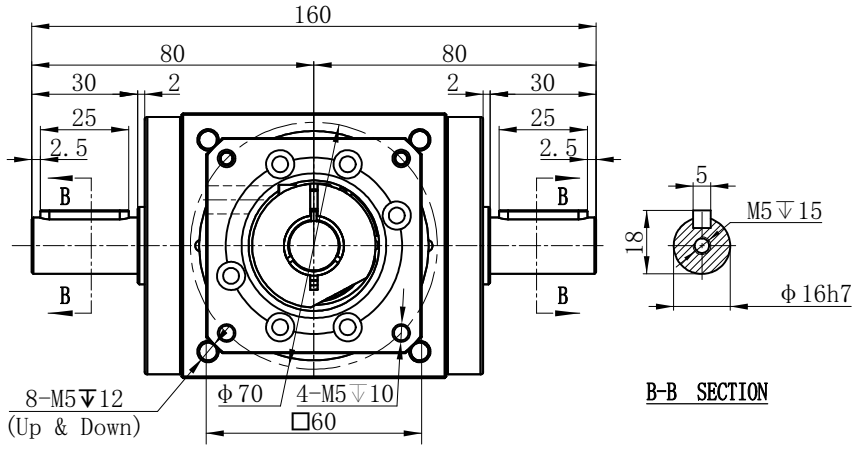

Transmission Ratio	1:3/4/5/7/10	Mass Moments Of Inertia	1.8 Kg.cm ^{2}
Nominal output torque	45 Nm	Max Acceleration Torque	68 Nm
Rated Input Speed	3000 rpm	Max Acceleration Input Speed	6000 rpm
Max.Radial Load	2400 N	Max.Axial Load	1200 N
Efficiency	≥ 98%	Operating Temperature	-30° ~ +100°
Weight ±3%	-- Kg	Service Life	20000 h
Standard Backlash	≤ 6 arcmin	Noise Level	≤ 67 dB

Note

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

High Precision Spieal Bevel Gearboxes

GST075

GST075-RVT-L1

Shaft Type	Precision

(Above specification are for standard reducer, No standard reducer only for reference)