



Customer Name:

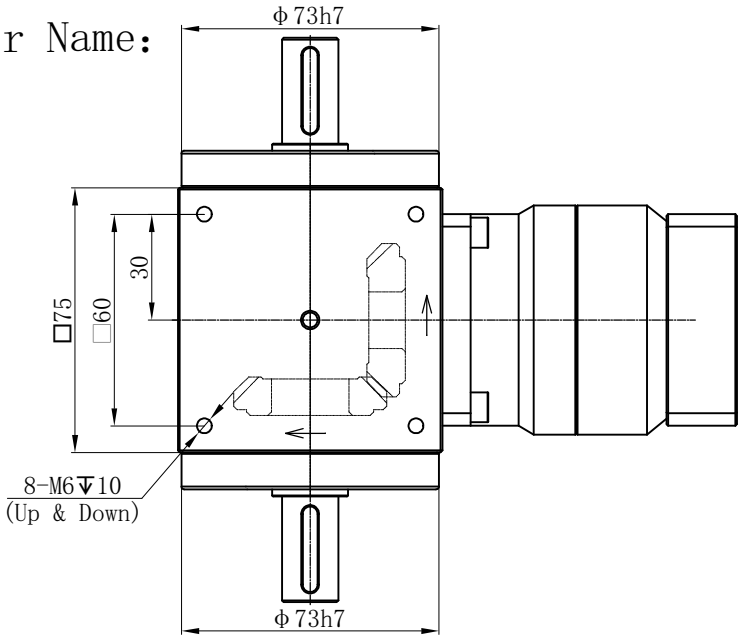


Input

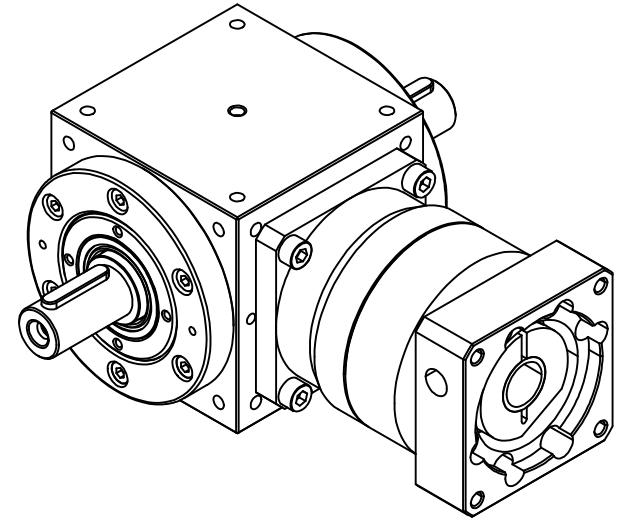

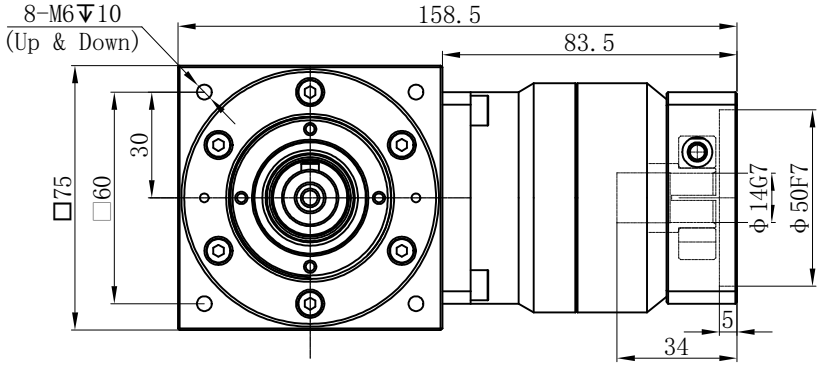

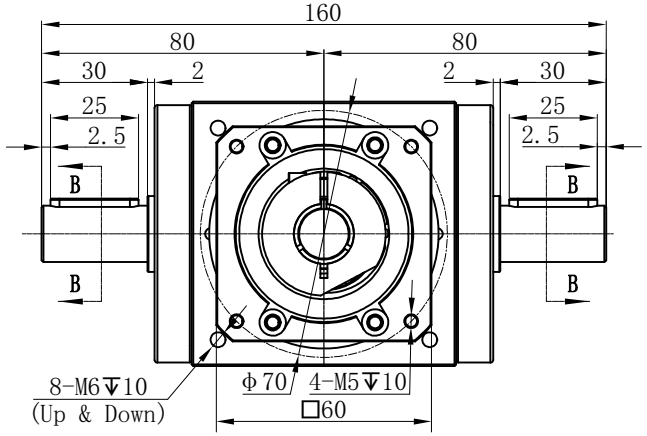



B-B SECTION

Transmission Ratio	1:10			
Nominal output torque	35 Nm		Mass Moments Of Inertia	0.15 Kg.cm^2
Rated Input Speed	3000 rpm		Max Acceleration Torque	52.5 Nm
Max.Radial Load	2400 N		Max Acceleration Input Speed	6000 rpm
Efficiency	≥ 94%		Max.Axial Load	1200 N
Weight ±3%	-- Kg		Operating Temperature	-20° ~ +90°
Standard Backlash	P0	≤ 4 arcmin	Service Life	20000 h
	P1	≤ 7 arcmin	Noise Level	≤ 69 dB
	P2	≤ 10 arcmin		

Note

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

High Precision Spieal Bevel Gearboxes

GST075

GST075-RVT-010/L1/060

Shaft Type	Precision

(Above specification are for standard reducer, No standard reducer only for reference)