


Customer name:

Output

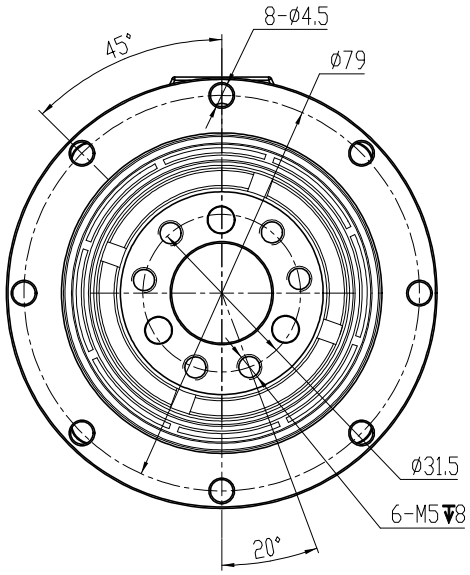

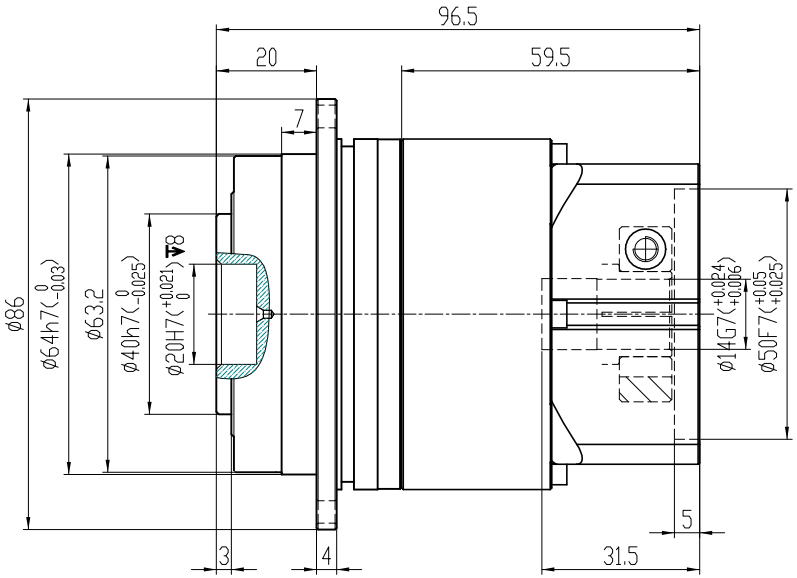


Input

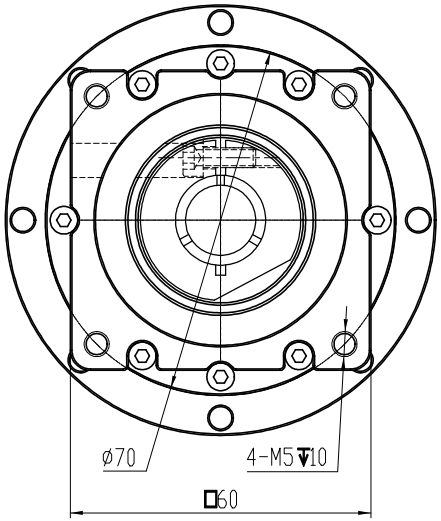

Transmission ratio	(A):1	Mass moments of inertia	(B)Kg.cm^2
Rated output torque	(C)Nm	Max.output torque	(D)Nm
Rated input speed	3000rpm	Max input speed	6000rpm
Max.Tilting moment	125Nm	Max.axial force	1050N
Efficiency	≥ 95%	Operating temperature	-20°~+90°
Mounting position	Any	Lubrication method	Synthetic grease
Weight ±3%	1.4Kg	Service life	20000h
Standard backlash	≤ 1.5 arcmin	Protection class	IP65
	≤ 3 arcmin	Noise level	54dB
Motor dimensions			

	16	0.14	48	86	Sign/Date
	21	0.14	60	108	
	31	0.14	50	90	
	46	0.14	40	72	
Ratio	A	B	C	D	



Note

Mark	No.	Sign	Date
	DRAW		
	CHEC		
	APPR		
	RULE		

Precision planetary reducer

GHA064

GHA064-L2

Shaft Type	Precision

Above specifications are for standard reducer and may be subject to change without notice.