


Customer name：

Output

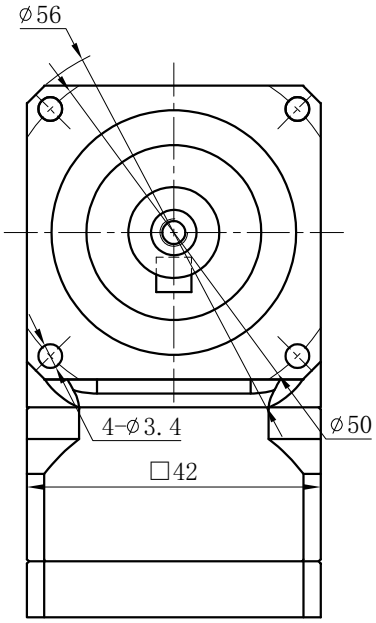

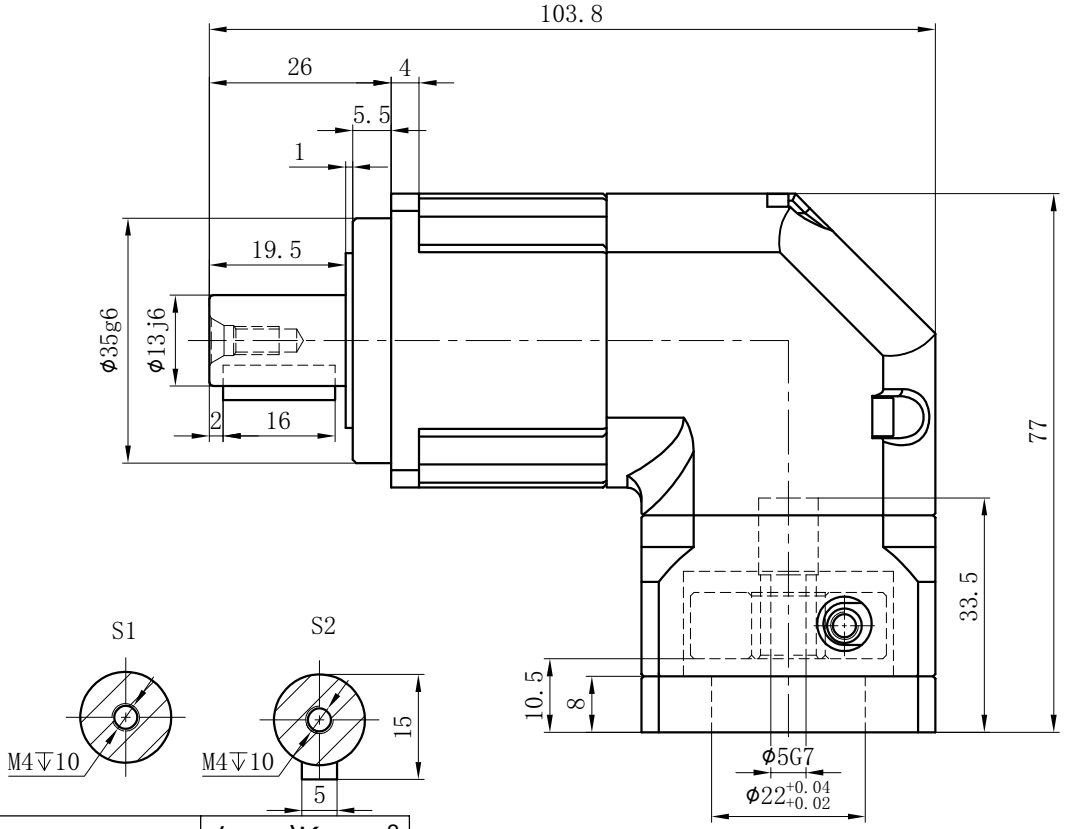

Input

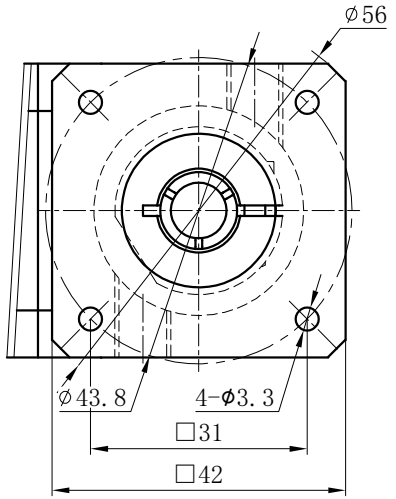

Transmission ratio	(A):1	Mass moments of inertia	(B)Kg.cm²
Rated output torque	(C)Nm	Max.Output torque	(D)Nm
Rated input speed	5000rpm	Max input speed	10000rpm
Max.radial force	780N	Max.axial force	390N
Efficiency	≥ 95%	Operating temperature	-20°~+90°
Mounting position	Any	Lubrication method	Synthetic grease
Weight ±3%	0.9Kg	Service life	20000h
Standard backlash	≤ 6 arcmin	Protection class	IP65
Motor power		Noise level	61dB
Motor dimensions			

	10	0.03	14	25	Sign/Date					
	7	0.03	19	34			8	0.03	17	30
	5	0.03	15	27			6	0.03	18	32
	4	0.03	12	21						
Ratio	A	B	C	D		Ratio	A	B	C	D

NOTE

ϕ8 to ϕ5

Mark	No.	Sign	Date

DRAW			
CHEC			
APPR			
RULE			

Precision Planetary Reducer	GBR042
GEARKO®	GBR042-L1
Shaft Type	Precision

(Above specifications are for standard reducer and may be subject to change without notice.)