GEARKO®



GLE/GLP/GLQ

系列直齒行星減速機

SPUR PLANETARY REDUCER

台灣格高有限公司

GearKo Drive Technology Limited

直齒行星減速機

Spur Planetary Reducer

GLE / GLP / GLQ

系列 / Series

台灣格高
GearKo Taiwan

目錄
Table of Contents

台灣格高｜技術標準與品質保證
GearKo Taiwan | Technical Standards and Quality Assurance 02

直齒系列概覽
Spur Gear Series Overview 04

GLE 系列 GLE Series

GLE060 06

GLE080 08

GLE120 10

GLP 系列 GLP Series

GLP070 12

GLP090 14

GLP120 16

GLQ 系列 GLQ Series

GLQ060 18

GLQ080 20

GLQ120 22

技術標準與品質保證

Technical Standards and Quality Assurance











檢測設備與作業環境

Inspection Equipment and Work Environment

台灣格高的品質優勢

GearKo's Quality Strengths


以完整的檢驗與測試流程，搭配高精度量測與檢測設備，
逐項確認品質要求。

GearKo uses high-precision measuring and inspection equipment
to verify each quality requirement through comprehensive inspection and testing.


品質管理與檢驗

Quality Management and Inspection



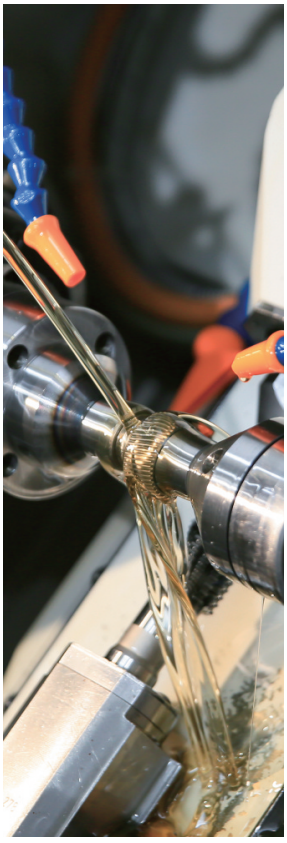



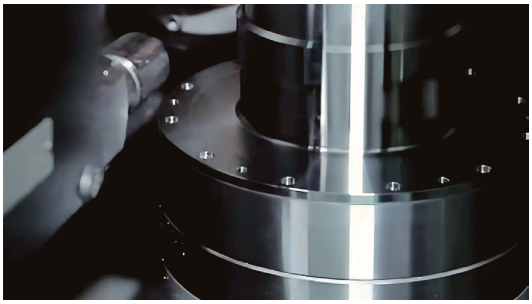

專業品質團隊 Quality Control Team

由具實務經驗的品質管制與品質管理團隊執行檢驗與管理。

An experienced quality control and quality management team handles inspection and oversight.

檢測設備與標準 Inspection Equipment and Standards

配備檢測設備，並建立完整的檢測標準與檢驗流程。

GearKo uses inspection equipment and maintains comprehensive testing standards and procedures.

品質管理與監督 Quality Management and Oversight

建立品質管理制度與監督考核機制，並參照 ISO 9000 系列的品質管理原則。

Quality management and oversight procedures draw on the principles of the ISO 9000 family.

零件檢驗與組裝 Component Inspection and Assembly

零件經全面檢驗後，再進行分類組裝。

All components are inspected before sorting and assembly.

直齒系列概覽

Spur Gear Series Overview

GLE / GLP / GLQ 系列

Spur Planetary Reducer

GLE / GLP / GLQ 系列直齒行星減速機結構精巧、安裝空間小、驅動扭矩大，經濟實用、穩定高效，並可依需求提供非標準品客製化。

GLE, GLP and GLQ spur planetary reducers feature a compact structure, small installation space and high output torque. They are economical, stable and efficient, and non-standard customization is available on request.



高剛性
High Rigidity

高扭矩密度
High Torque Density

高功率密度
High Power Density

高精度
High Precision

高效率
High Efficiency

低慣量、高動態響應
Low Inertia, High Dynamics

系列規格比較

Series Comparison

型號選型一覽

Model Selection Overview

型號 Model	段數 Stage	減速比 Ratio (i)	額定輸出扭矩 Nominal Output Torque (Nm)	背隙 Backlash (arcmin)	最大徑向力 Max. Radial Force (N)	最大軸向力 Max. Axial Force (N)	額定輸入轉速 Nominal Input Speed (rpm)	最大輸入轉速 Max. Input Speed (rpm)	重量 Weight (kg)	頁碼 Page
GLE060	1	3–10	15–40	≤10	700	800	4000	8000	0.9	06
	2	12–64	18–44	≤12	700	800	4000	8000	1.1	
	3	60–512	18–44	≤15	700	800	4000	8000	1.3	
GLE080	1	3–10	38–115	≤7	1000	1450	4000	7000	2.2	08
	2	12–64	50–120	≤9	1000	1450	4000	7000	2.7	
	3	60–512	50–120	≤11	1000	1450	4000	7000	3.2	
GLE120	1	3–10	95–195	≤7	2000	3800	3500	6500	5.9	10
	2	12–64	120–260	≤9	2000	3800	3500	6500	7.7	
	3	60–512	120–260	≤11	2000	3800	3500	6500	9.5	
GLP070	1	3–10	15–33	≤10	1500	2000	4000	8000	1.4	12
	2	12–100	15–33	≤12	1500	2000	4000	8000	1.9	
GLP090	1	3–10	38–90	≤7	3100	3800	4000	7000	3.3	14
	2	12–100	38–90	≤9	3100	3800	4000	7000	4.1	
GLP120	1	3–10	95–172	≤7	4000	5900	3500	6500	7.7	16
	2	12–100	95–195	≤9	4000	5900	3500	6500	9.8	
GLQ060	1	3–10	15–40	≤10	1500	1950	4000	8000	0.9	18
	2	12–64	18–44	≤12	1500	1950	4000	8000	1.1	
	3	60–512	18–44	≤15	1500	1950	4000	8000	1.3	
GLQ080	1	3–10	38–115	≤7	2500	3800	4000	7000	3	20
	2	12–64	50–120	≤9	2500	3800	4000	7000	3.5	
	3	60–512	50–120	≤11	2500	3800	4000	7000	4	
GLQ120	1	3–10	95–195	≤7	4000	3800	3500	6500	6.7	22
	2	12–64	120–260	≤9	4000	3800	3500	6500	8.5	
	3	60–512	120–260	≤11	4000	3800	3500	6500	10.3	


＊ 各型號完整規格與尺寸請參閱對應頁碼。此型錄中所有產品型號及參數如有變更，恕不另行公告。訂購前請與我們確認。

* See the page listed for each model for full specifications and dimensions. All parameters are subject to change without prior notice. Please confirm before ordering.


GLE060 尺寸圖

GLE060 Dimensions


GLE060 單段 1 Stage

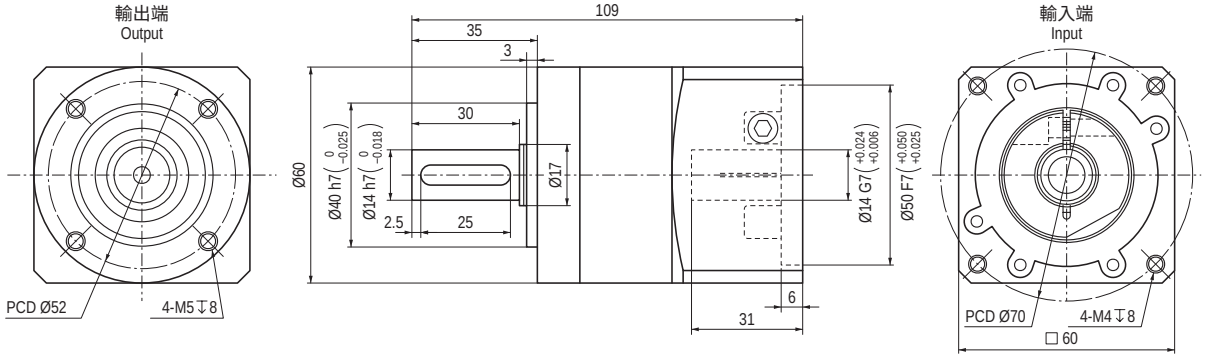

GLE060 雙段 2 Stage

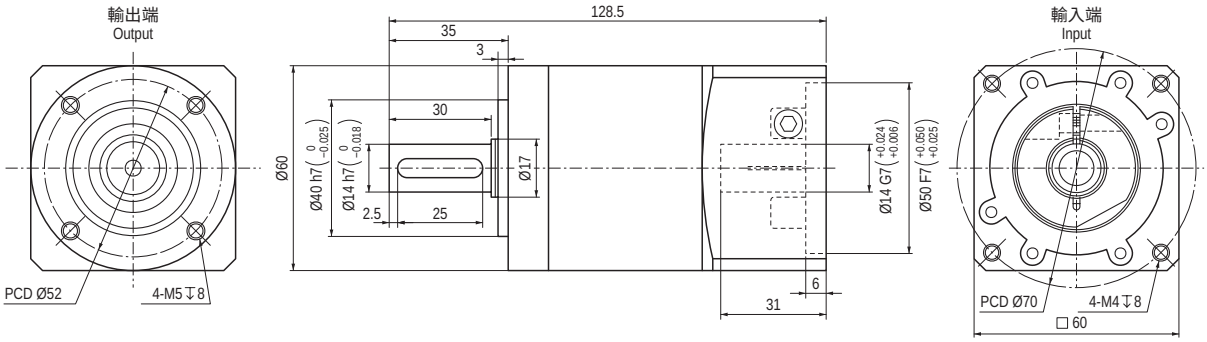

GLE060 三段 3 Stage

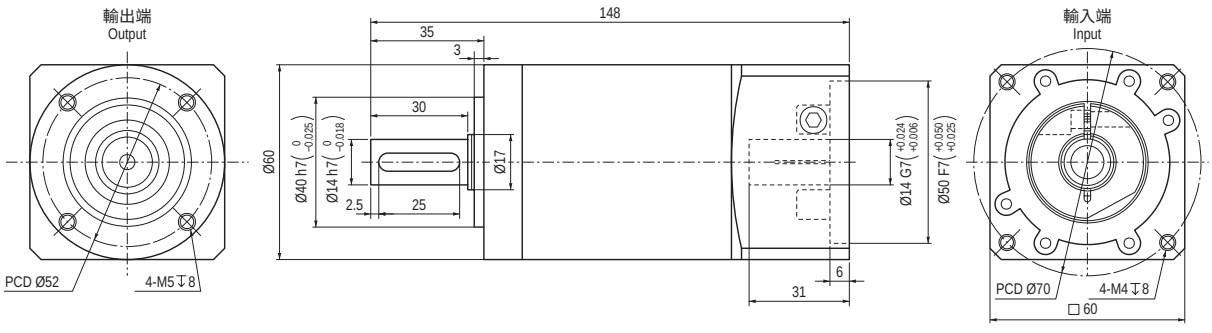

GLE060 性能資料

GLE060 Performance Data


GLE 系列——嚴格把關，承載扭矩大，齒輪滲碳硬化

GLE 系列減速機結構精巧、安裝空間小、驅動扭矩大，經濟實用、穩定高效，並可依需求提供非標準品客製化。

The GLE series planetary reducer features a modular, compact design with high reliability and efficiency, offering an optimal balance of performance and cost.

GLE060		GLE060-L1 1 段 1-Stage						GLE060-L2 2 段 2-Stage								GLE060-L3 3 段 3-Stage								
減速比 Speed Ratio	i	3	4	5	7	8	10	12	15	16	20	25	32	40	64	60	80	100	120	160	200	256	320	512
額定輸出扭矩 Nominal Output Torque	Nm	28	38	40	25	18	15	44	44	44	44	40	44	40	18	44	44	44	44	44	40	44	40	18
最大輸出扭矩 Maximum Output Torque	Nm	45	61	64	40	29	24	70	70	70	70	64	70	64	29	70	70	70	70	70	64	70	64	29
急停扭矩 Emergency Stop Torque	Nm	2 倍額定輸出扭矩 2 times nominal output torque																						
最大徑向力 Maximum Radial Force	N	700																						
最大軸向力 Maximum Axial Force	N	800																						
額定輸入轉速 Nominal Input Speed	rpm	4000																						
最大輸入轉速 Maximum Input Speed	rpm	8000																						
效率 Efficiency	%	≥98						≥97								≥92								
使用壽命 Service Life	h	20000																						
噪音值 Noise	dB	≤58																						
重量 Weight	kg	0.9						1.1								1.3								
背隙 Backlash	arcmin	≤10						≤12								≤15								
使用溫度 Operating Temperature	°C	-25~90																						
潤滑 Lubrication	-	合成潤滑油脂 Synthetic Grease																						
防護等級 Protection Class	-	IP54																						
安裝位置 Mounting Position	-	任意方向 Any Direction																						
轉動慣量 Moment of Inertia	kg·cm²	0.06	0.14	0.13				0.13								0.13								

GLE060 鍵槽 Keyway




此型錄中所有產品型號及參數如有變更，恕不另行公告。訂購前請與我們確認。

All product models and parameters in this catalog are subject to change without prior notice. Please confirm with the company before ordering.


GLE080 尺寸圖

GLE080 Dimensions


GLE080 單段 1 Stage

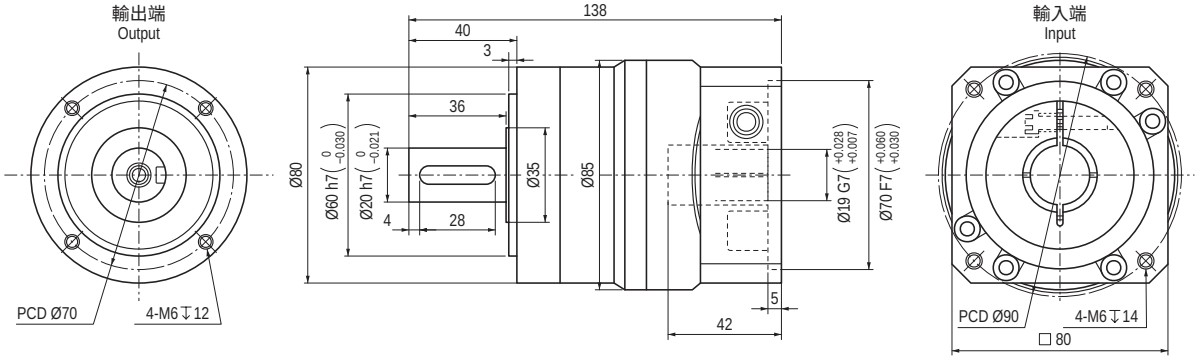

GLE080 雙段 2 Stage

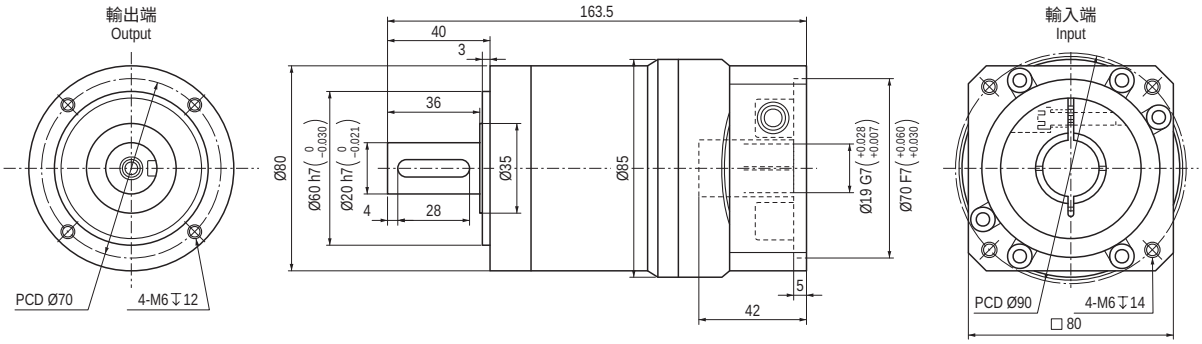

GLE080 三段 3 Stage

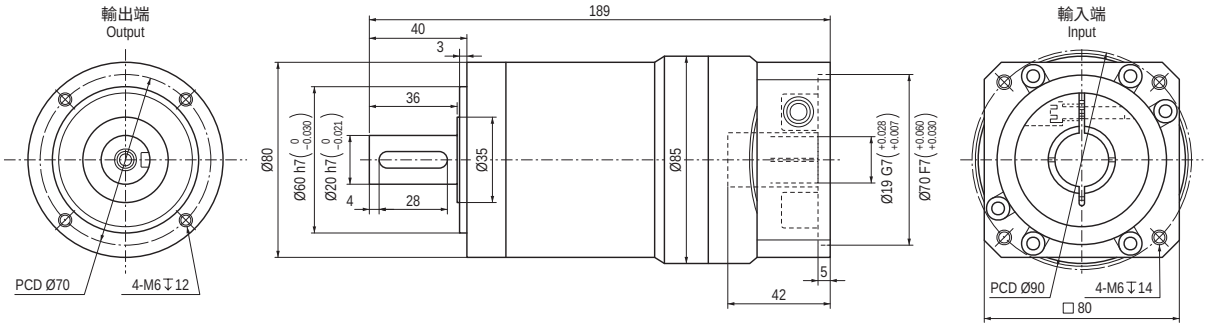

GLE080 性能資料

GLE080 Performance Data


GLE 系列——嚴格把關，承載扭矩大，齒輪滲碳硬化

GLE 系列減速機結構精巧、安裝空間小、驅動扭矩大，經濟實用、穩定高效，並可依需求提供非標準品客製化。

The GLE series planetary reducer features a modular, compact design with high reliability and efficiency, offering an optimal balance of performance and cost.

GLE080		GLE080-L1 1 段 1-Stage						GLE080-L2 2 段 2-Stage								GLE080-L3 3 段 3-Stage								
減速比 Speed Ratio	i	3	4	5	7	8	10	12	15	16	20	25	32	40	64	60	80	100	120	160	200	256	320	512
額定輸出扭矩 Nominal Output Torque	Nm	85	115	110	65	50	38	120	110	120	120	110	120	110	50	110	120	120	110	120	110	120	110	50
最大輸出扭矩 Maximum Output Torque	Nm	136	184	176	104	80	61	192	176	192	192	176	192	176	80	70	70	70	70	70	64	70	64	29
急停扭矩 Emergency Stop Torque	Nm	2 倍額定輸出扭矩 2 times nominal output torque																						
最大徑向力 Maximum Radial Force	N	1000																						
最大軸向力 Maximum Axial Force	N	1450																						
額定輸入轉速 Nominal Input Speed	rpm	4000																						
最大輸入轉速 Maximum Input Speed	rpm	7000																						
效率 Efficiency	%	≥98						≥97								≥92								
使用壽命 Service Life	h	20000																						
噪音值 Noise	dB	≤60																						
重量 Weight	kg	2.2						2.7								3.2								
背隙 Backlash	arcmin	≤7						≤9								≤11								
使用溫度 Operating Temperature	°C	-25~90																						
潤滑 Lubrication	-	合成潤滑油脂 Synthetic Grease																						
防護等級 Protection Class	-	IP54																						
安裝位置 Mounting Position	-	任意方向 Any Direction																						
轉動慣量 Moment of Inertia	kg·cm²	0.61	0.48	0.47	0.45	0.44	0.44	0.47							0.44	0.44								

GLE080 鍵槽 Keyway




此型錄中所有產品型號及參數如有變更，恕不另行公告。訂購前請與我們確認。

All product models and parameters in this catalog are subject to change without prior notice. Please confirm with the company before ordering.


GLE120 尺寸圖

GLE120 Dimensions


GLE120 單段 1 Stage

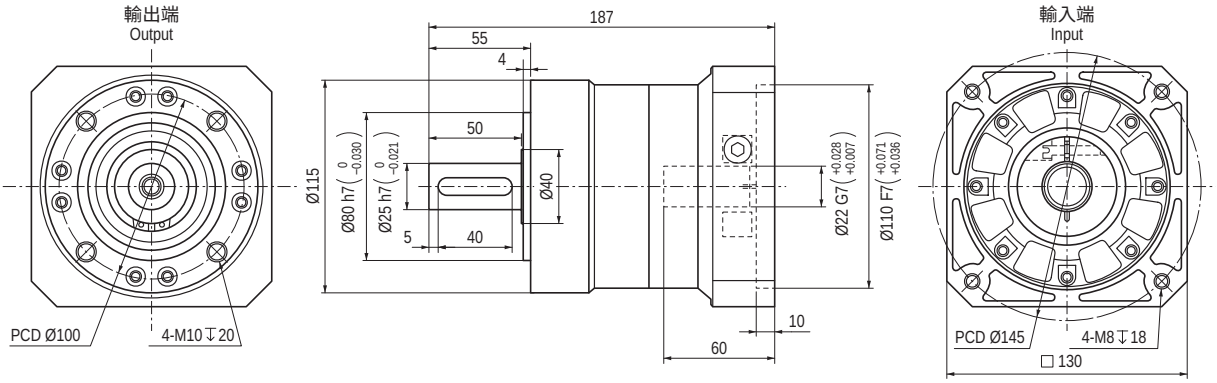

GLE120 雙段 2 Stage

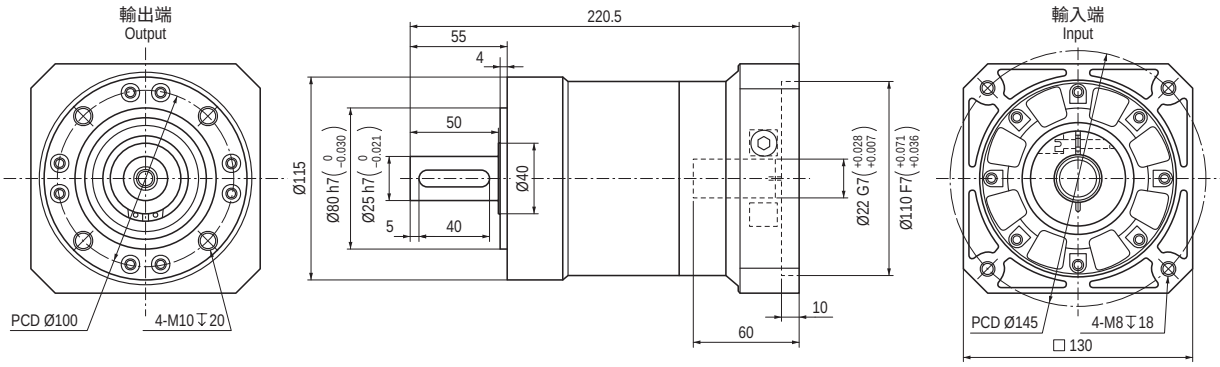

GLE120 三段 3 Stage

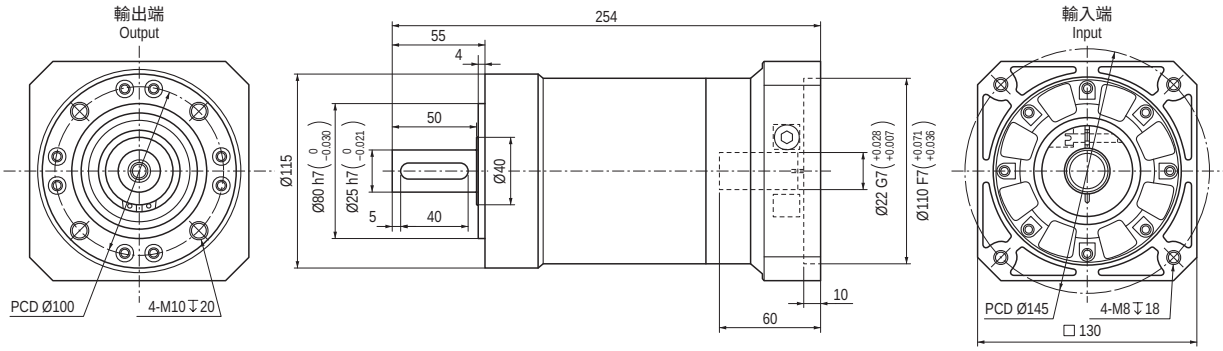

GLE120 性能資料

GLE120 Performance Data


GLE 系列——嚴格把關，承載扭矩大，齒輪滲碳硬化

GLE 系列減速機結構精巧、安裝空間小、驅動扭矩大，經濟實用、穩定高效，並可依需求提供非標準品客製化。

The GLE series planetary reducer features a modular, compact design with high reliability and efficiency, offering an optimal balance of performance and cost.

GLE120		GLE120-L1 1 段 1-Stage						GLE120-L2 2 段 2-Stage								GLE120-L3 3 段 3-Stage								
減速比 Speed Ratio	i	3	4	5	7	8	10	12	15	16	20	25	32	40	64	60	80	100	120	160	200	256	320	512
額定輸出扭矩 Nominal Output Torque	Nm	115	155	195	135	120	95	260	230	260	260	230	260	230	120	260	260	260	230	260	230	260	230	120
最大輸出扭矩 Maximum Output Torque	Nm	184	248	312	216	192	152	416	368	416	416	368	416	368	192	416	416	416	368	416	368	416	368	192
急停扭矩 Emergency Stop Torque	Nm	2 倍額定輸出扭矩 2 times nominal output torque																						
最大徑向力 Maximum Radial Force	N	2000																						
最大軸向力 Maximum Axial Force	N	3800																						
額定輸入轉速 Nominal Input Speed	rpm	3500																						
最大輸入轉速 Maximum Input Speed	rpm	6500																						
效率 Efficiency	%	≥98						≥97								≥92								
使用壽命 Service Life	h	20000																						
噪音值 Noise	dB	≤65																						
重量 Weight	kg	5.9						7.7								9.5								
背隙 Backlash	arcmin	≤7						≤9								≤11								
使用溫度 Operating Temperature	°C	-25~90																						
潤滑 Lubrication	-	合成潤滑油脂 Synthetic Grease																						
防護等級 Protection Class	-	IP54																						
安裝位置 Mounting Position	-	任意方向 Any Direction																						
轉動慣量 Moment of Inertia	kg·cm²	3.25	2.74	2.71	2.65	2.58	2.57	0.47							0.44	0.47							0.44	0.44

GLE120 鍵槽 Keyway




此型錄中所有產品型號及參數如有變更，恕不另行公告。訂購前請與我們確認。

All product models and parameters in this catalog are subject to change without prior notice. Please confirm with the company before ordering.


GLP070 尺寸圖

GLP070 Dimensions

GLP070 單段 1 Stage

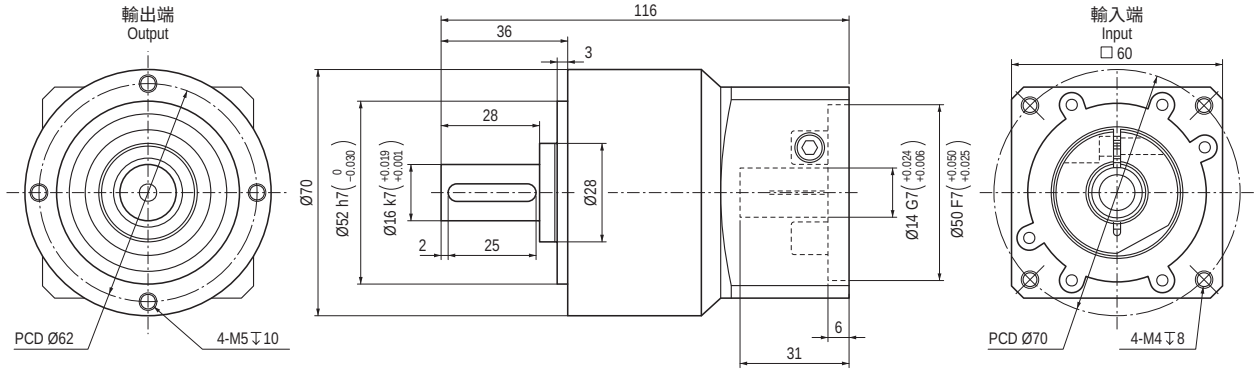

GLP070 雙段 2 Stage

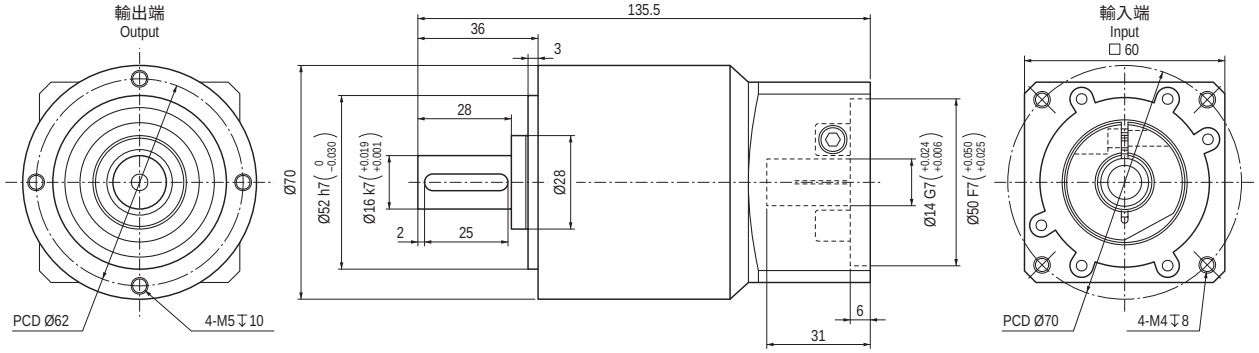

GLP070 性能資料

GLP070 Performance Data


GLP 系列——嚴格把關，承載扭矩大，齒輪滲碳硬化

GLP 系列減速機結構精巧、安裝空間小、驅動扭矩大，經濟實用、穩定高效，並可依需求提供非標準品客製化。

The GLP series planetary reducer features a modular, compact design with high reliability and efficiency, offering an optimal balance of performance and cost.

GLP070		GLP070-L1 1 段 1-Stage						GLP070-L2 2 段 2-Stage								
減速比 Speed Ratio	i	3	4	5	7	8	10	12	15	16	20	25	32	40	64	100
額定輸出扭矩 Nominal Output Torque	Nm	28	33	30	25	18	15	33	33	33	33	30	33	30	18	15
最大輸出扭矩 Maximum Output Torque	Nm	45	53	48	40	29	24	416	368	416	416	368	416	368	192	192
急停扭矩 Emergency Stop Torque	Nm	2 倍額定輸出扭矩 2 times nominal output torque														
最大徑向力 Maximum Radial Force	N	1500														
最大軸向力 Maximum Axial Force	N	2000														
額定輸入轉速 Nominal Input Speed	rpm	4000														
最大輸入轉速 Maximum Input Speed	rpm	8000														
效率 Efficiency	%	≥98						≥97								
使用壽命 Service Life	h	20000														
噪音值 Noise	dB	≤58														
重量 Weight	kg	1.4						1.9								
背隙 Backlash	arcmin	≤10						≤12								
使用溫度 Operating Temperature	°C	-25~90														
潤滑 Lubrication	-	合成潤滑油脂 Synthetic Grease														
防護等級 Protection Class	-	IP54														
安裝位置 Mounting Position	-	任意方向 Any Direction														
轉動慣量 Moment of Inertia	kg·cm²	0.06	0.14	0.13				0.13								

GLP070 鍵槽 Keyway




此型錄中所有產品型號及參數如有變更，恕不另行公告。訂購前請與我們確認。

All product models and parameters in this catalog are subject to change without prior notice. Please confirm with the company before ordering.


GLP090 尺寸圖

GLP090 Dimensions

GLP090 單段 1 Stage

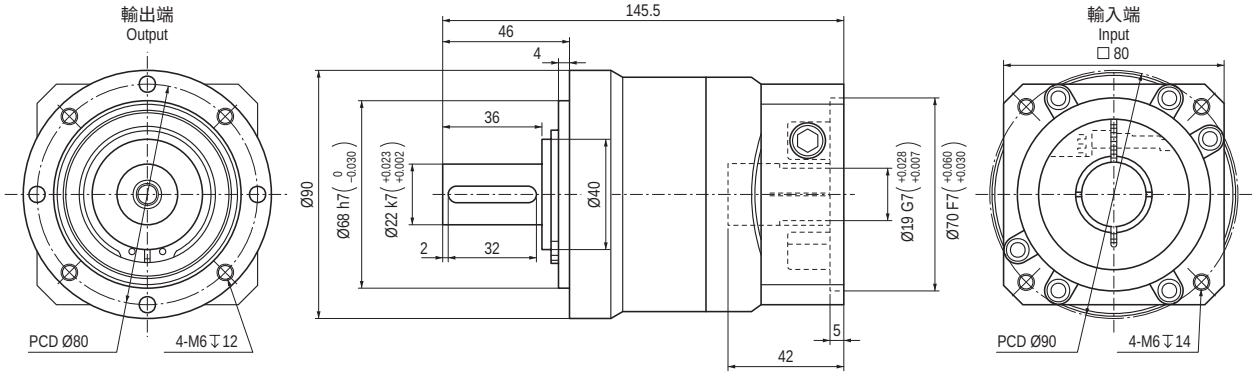

GLP090 雙段 2 Stage

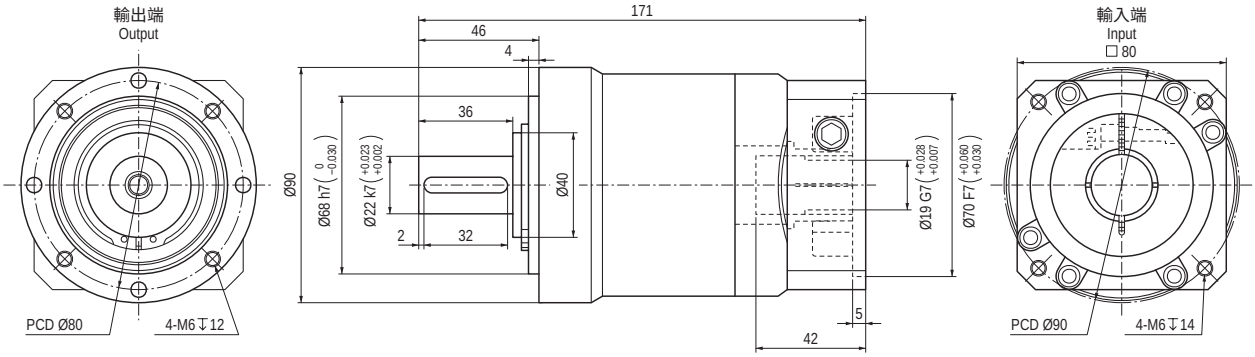

GLP090 性能資料

GLP090 Performance Data


GLP 系列——嚴格把關，承載扭矩大，齒輪滲碳硬化

GLP 系列減速機結構精巧、安裝空間小、驅動扭矩大，經濟實用、穩定高效，並可依需求提供非標準品客製化。

The GLP series planetary reducer features a modular, compact design with high reliability and efficiency, offering an optimal balance of performance and cost.

GLP090		GLP090-L1 1 段 1-Stage						GLP090-L2 2 段 2-Stage								
減速比 Speed Ratio	i	3	4	5	7	8	10	12	15	16	20	25	32	40	64	100
額定輸出扭矩 Nominal Output Torque	Nm	85	90	82	65	50	38	90	82	90	90	82	90	82	50	38
最大輸出扭矩 Maximum Output Torque	Nm	136	144	131	104	80	61	144	131	144	144	131	144	131	80	61
急停扭矩 Emergency Stop Torque	Nm	2 倍額定輸出扭矩 2 times nominal output torque														
最大徑向力 Maximum Radial Force	N	3100														
最大軸向力 Maximum Axial Force	N	3800														
額定輸入轉速 Nominal Input Speed	rpm	4000														
最大輸入轉速 Maximum Input Speed	rpm	7000														
效率 Efficiency	%	≥98						≥97								
使用壽命 Service Life	h	20000														
噪音值 Noise	dB	≤60														
重量 Weight	kg	3.3						4.1								
背隙 Backlash	arcmin	≤7						≤9								
使用溫度 Operating Temperature	°C	-25~90														
潤滑 Lubrication	-	合成潤滑油脂 Synthetic Grease														
防護等級 Protection Class	-	IP54														
安裝位置 Mounting Position	-	任意方向 Any Direction														
轉動慣量 Moment of Inertia	kg·cm²	136	144	131	104	80	61	0.47							0.44	0.44

GLP090 鍵槽 Keyway




此型錄中所有產品型號及參數如有變更，恕不另行公告。訂購前請與我們確認。

All product models and parameters in this catalog are subject to change without prior notice. Please confirm with the company before ordering.


GLP120 尺寸圖

GLP120 Dimensions

GLP120 單段 1 Stage

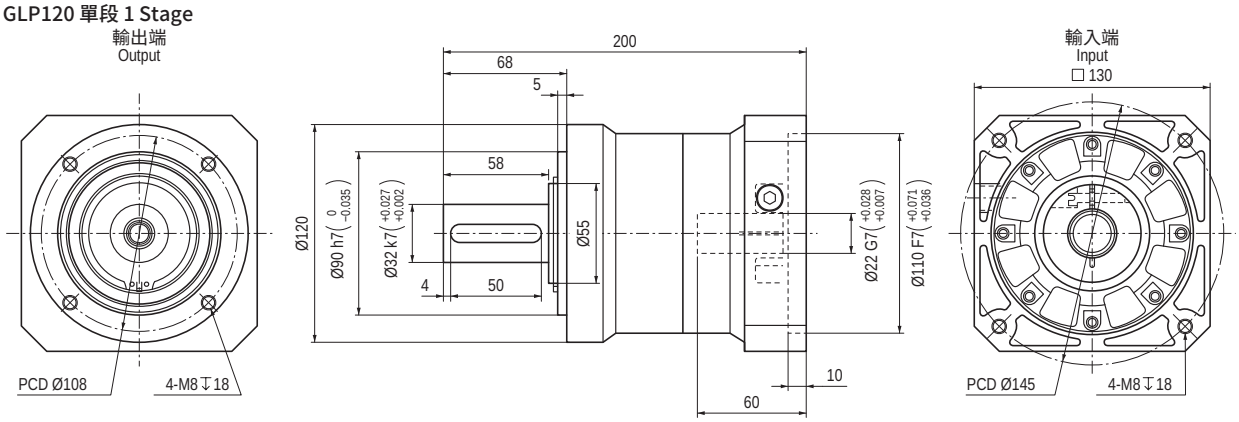

GLP120 雙段 2 Stage

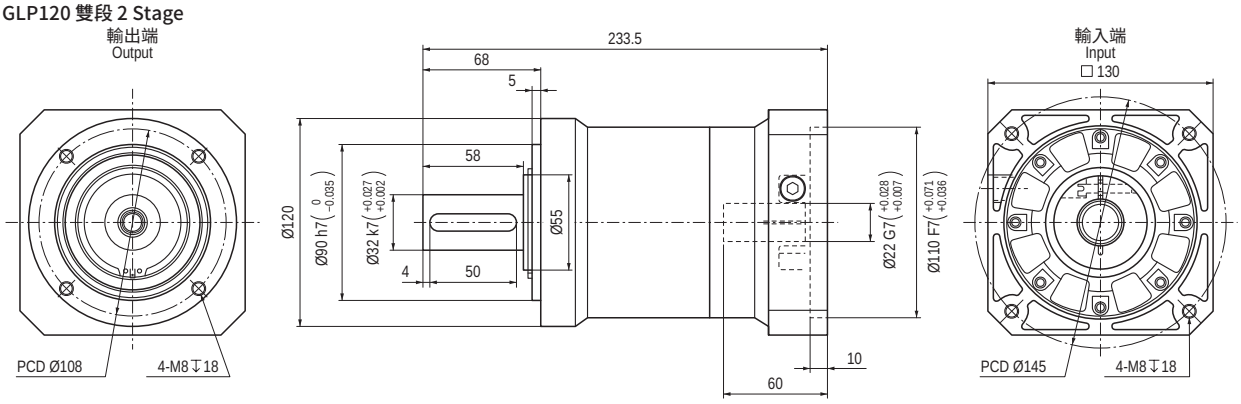

GLP120 性能資料

GLP120 Performance Data


GLP 系列——嚴格把關，承載扭矩大，齒輪滲碳硬化

GLP 系列減速機結構精巧、安裝空間小、驅動扭矩大，經濟實用、穩定高效，並可依需求提供非標準品客製化。

The GLP series planetary reducer features a modular, compact design with high reliability and efficiency, offering an optimal balance of performance and cost.

GLP120		GLP120-L1 1 段 1-Stage						GLP120-L2 2 段 2-Stage								
減速比 Speed Ratio	i	3	4	5	7	8	10	12	15	16	20	25	32	40	64	100
額定輸出扭矩 Nominal Output Torque	Nm	115	155	172	135	120	95	195	172	195	195	172	195	172	120	95
最大輸出扭矩 Maximum Output Torque	Nm	184	248	275	216	192	152	312	275	312	312	275	312	275	192	152
急停扭矩 Emergency Stop Torque	Nm	2 倍額定輸出扭矩 2 times nominal output torque														
最大徑向力 Maximum Radial Force	N	4000														
最大軸向力 Maximum Axial Force	N	5900														
額定輸入轉速 Nominal Input Speed	rpm	3500														
最大輸入轉速 Maximum Input Speed	rpm	6500														
效率 Efficiency	%	≥98						≥97								
使用壽命 Service Life	h	20000														
噪音值 Noise	dB	≤65														
重量 Weight	kg	7.7						9.8								
背隙 Backlash	arcmin	≤7						≤9								
使用溫度 Operating Temperature	°C	-25~90														
潤滑 Lubrication	-	合成潤滑油脂 Synthetic Grease														
防護等級 Protection Class	-	IP54														
安裝位置 Mounting Position	-	任意方向 Any Direction														
轉動慣量 Moment of Inertia	kg·cm²	184	248	275	216	192	152	2.05								

GLP120 鍵槽 Keyway




此型錄中所有產品型號及參數如有變更，恕不另行公告。訂購前請與我們確認。

All product models and parameters in this catalog are subject to change without prior notice. Please confirm with the company before ordering.


GLQ060 尺寸圖

GLQ060 Dimensions


GLQ060 單段 1 Stage

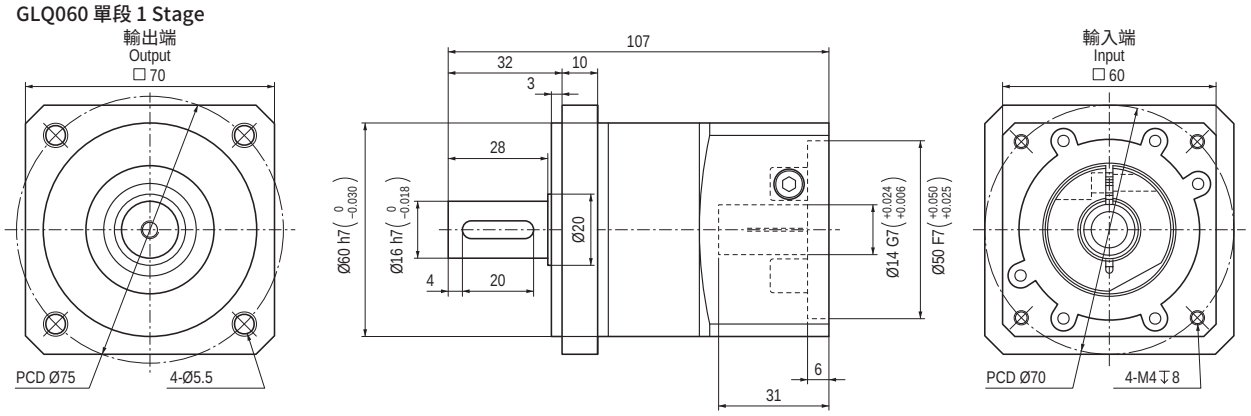

GLQ060 雙段 2 Stage

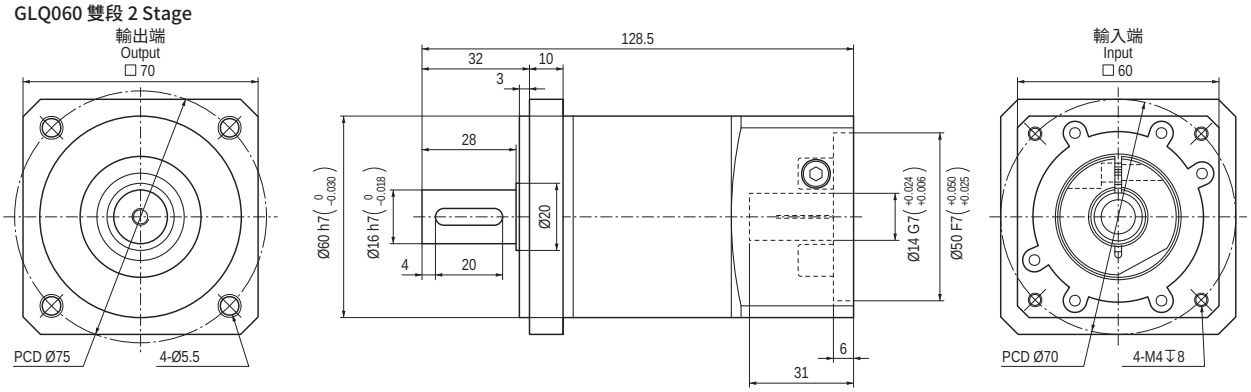

GLQ060 三段 3 Stage

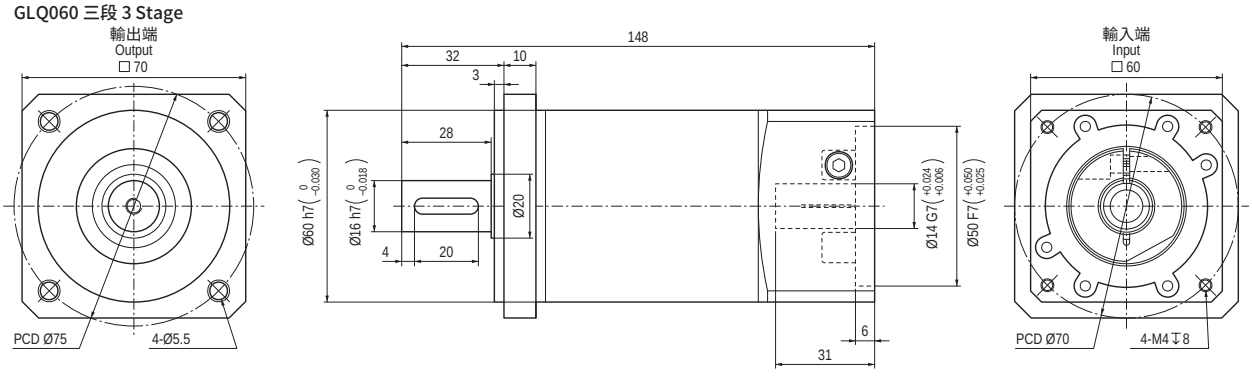

GLQ060 性能資料

GLQ060 Performance Data


GLQ 系列——嚴格把關，承載扭矩大，齒輪滲碳硬化

GLQ 系列減速機結構精巧、安裝空間小、驅動扭矩大，經濟實用、穩定高效，並可依需求提供非標準品客製化。

The GLQ series planetary reducer features a modular, compact design with high reliability and efficiency, offering an optimal balance of performance and cost.

GLQ060		GLQ060-L1 1 段 1-Stage						GLQ060-L2 2 段 2-Stage								GLQ060-L3 3 段 3-Stage								
減速比 Speed Ratio	i	3	4	5	7	8	10	12	15	16	20	25	32	40	64	60	80	100	120	160	200	256	320	512
額定輸出扭矩 Nominal Output Torque	Nm	28	38	40	25	18	15	44	44	44	44	40	44	40	18	44	44	44	44	44	40	44	40	18
最大輸出扭矩 Maximum Output Torque	Nm	45	61	64	40	29	24	70	70	70	70	64	70	64	29	70	70	70	70	70	64	70	64	29
急停扭矩 Emergency Stop Torque	Nm	2 倍額定輸出扭矩 2 times nominal output torque																						
最大徑向力 Maximum Radial Force	N	1500																						
最大軸向力 Maximum Axial Force	N	1950																						
額定輸入轉速 Nominal Input Speed	rpm	4000																						
最大輸入轉速 Maximum Input Speed	rpm	8000																						
效率 Efficiency	%	≥98						≥97								≥92								
使用壽命 Service Life	h	20000																						
噪音值 Noise	dB	≤58																						
重量 Weight	kg	0.9						1.1								1.3								
背隙 Backlash	arcmin	≤10						≤12								≤15								
使用溫度 Operating Temperature	°C	-25~90																						
潤滑 Lubrication	-	合成潤滑油脂 Synthetic Grease																						
防護等級 Protection Class	-	IP54																						
安裝位置 Mounting Position	-	任意方向 Any Direction																						
轉動慣量 Moment of Inertia	kg·cm²	0.06	0.14	0.13				0.13								0.13								

GLQ060 鍵槽 Keyway




此型錄中所有產品型號及參數如有變更，恕不另行公告。訂購前請與我們確認。

All product models and parameters in this catalog are subject to change without prior notice. Please confirm with the company before ordering.


GLQ080 尺寸圖

GLQ080 Dimensions


GLQ080 單段 1 Stage

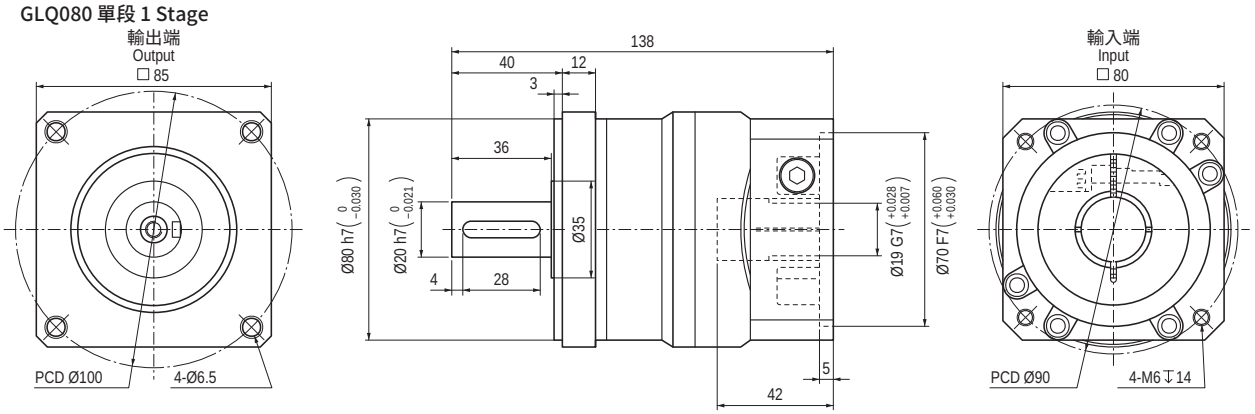

GLQ080 雙段 2 Stage

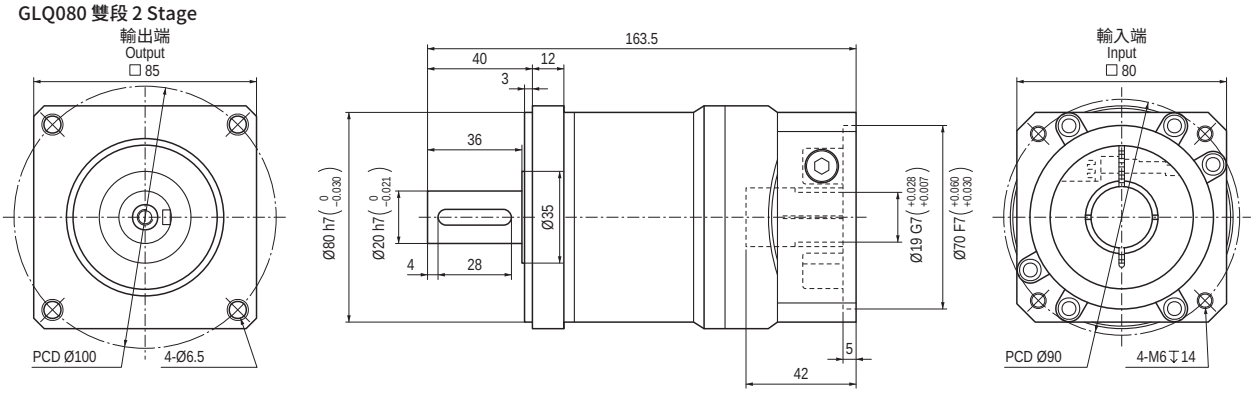

GLQ080 三段 3 Stage

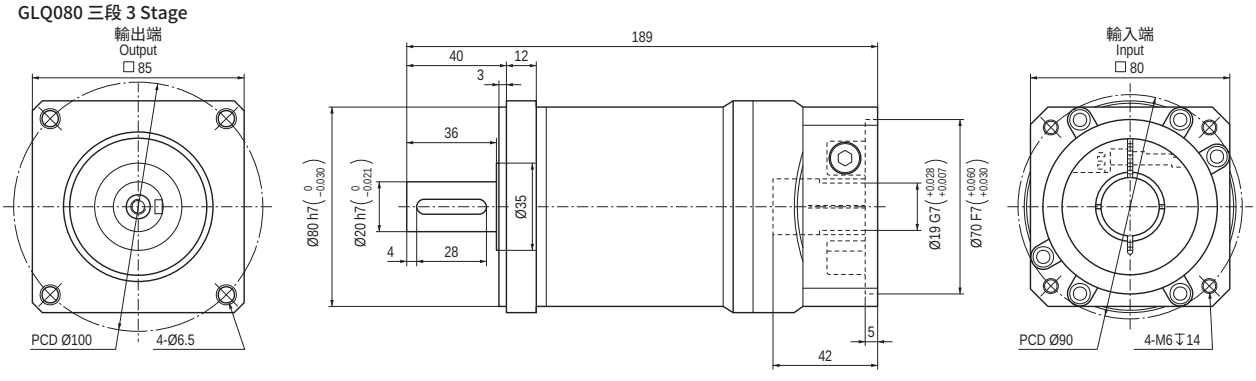

GLQ080 性能資料

GLQ080 Performance Data


GLQ 系列——嚴格把關，承載扭矩大，齒輪滲碳硬化

GLQ 系列減速機結構精巧、安裝空間小、驅動扭矩大，經濟實用、穩定高效，並可依需求提供非標準品客製化。

The GLQ series planetary reducer features a modular, compact design with high reliability and efficiency, offering an optimal balance of performance and cost.

GLQ080		GLQ080-L1 1 段 1-Stage						GLQ080-L2 2 段 2-Stage								GLQ080-L3 3 段 3-Stage								
減速比 Speed Ratio	i	3	4	5	7	8	10	12	15	16	20	25	32	40	64	60	80	100	120	160	200	256	320	512
額定輸出扭矩 Nominal Output Torque	Nm	85	115	110	65	50	38	120	110	120	120	110	120	110	50	110	120	120	110	120	110	120	110	50
最大輸出扭矩 Maximum Output Torque	Nm	136	184	176	104	80	61	192	176	192	192	176	192	176	80	176	192	192	176	192	176	192	176	80
急停扭矩 Emergency Stop Torque	Nm	2 倍額定輸出扭矩 2 times nominal output torque																						
最大徑向力 Maximum Radial Force	N	2500																						
最大軸向力 Maximum Axial Force	N	3800																						
額定輸入轉速 Nominal Input Speed	rpm	4000																						
最大輸入轉速 Maximum Input Speed	rpm	7000																						
效率 Efficiency	%	≥98						≥97								≥92								
使用壽命 Service Life	h	20000																						
噪音值 Noise	dB	≤60																						
重量 Weight	kg	3						3.5								4								
背隙 Backlash	arcmin	≤7						≤9								≤11								
使用溫度 Operating Temperature	°C	-25~90																						
潤滑 Lubrication	-	合成潤滑油脂 Synthetic Grease																						
防護等級 Protection Class	-	IP54																						
安裝位置 Mounting Position	-	任意方向 Any Direction																						
轉動慣量 Moment of Inertia	kg·cm²	0.61	0.48	0.47	0.45	0.44	0.44	0.47							0.44	0.44								

GLQ080 鍵槽 Keyway




此型錄中所有產品型號及參數如有變更，恕不另行公告。訂購前請與我們確認。

All product models and parameters in this catalog are subject to change without prior notice. Please confirm with the company before ordering.


GLQ120 尺寸圖

GLQ120 Dimensions


GLQ120 單段 1 Stage

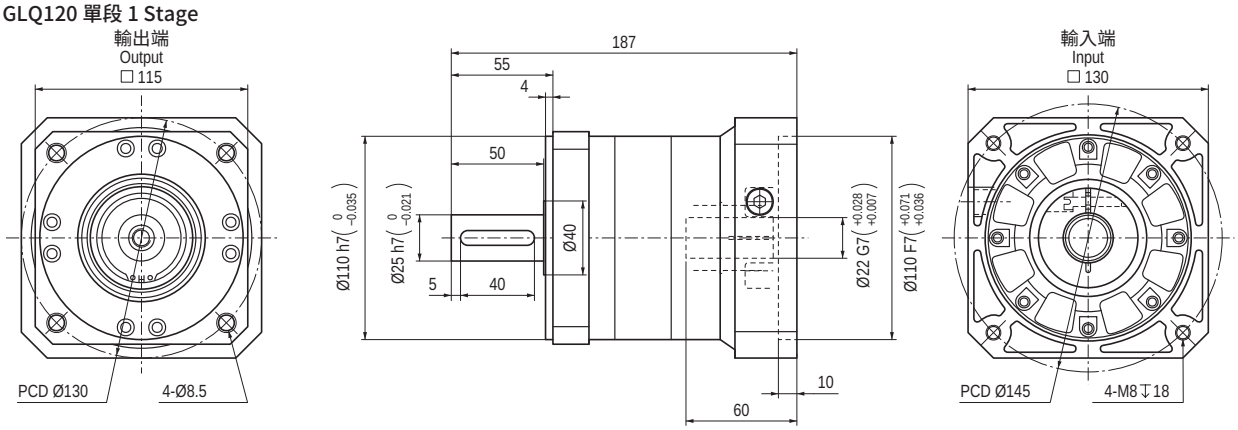

GLQ120 雙段 2 Stage

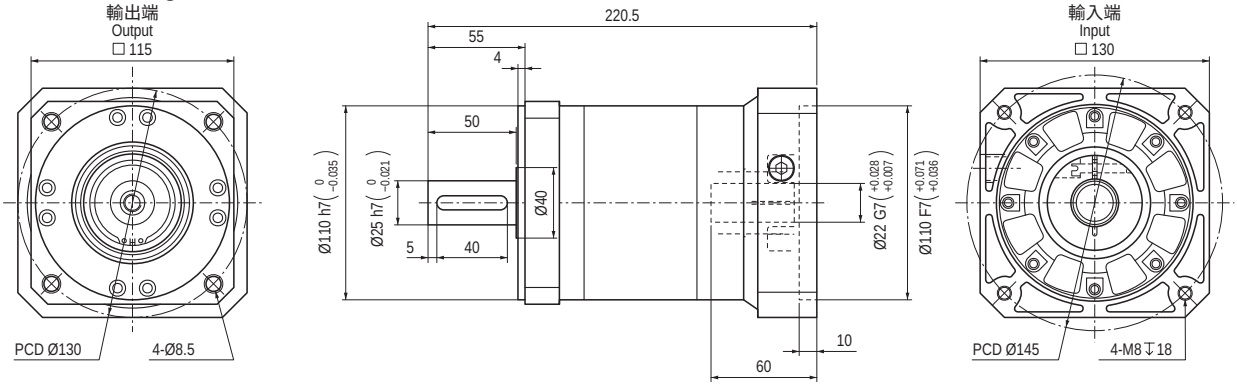

GLQ120 三段 3 Stage

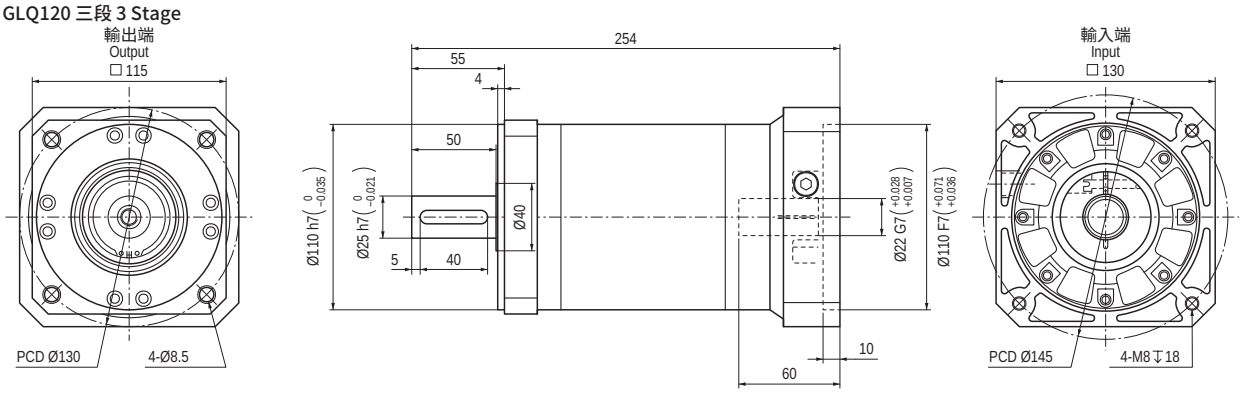

GLQ120 性能資料

GLQ120 Performance Data


GLQ 系列——嚴格把關，承載扭矩大，齒輪滲碳硬化

GLQ 系列減速機結構精巧、安裝空間小、驅動扭矩大，經濟實用、穩定高效，並可依需求提供非標準品客製化。

The GLQ series planetary reducer features a modular, compact design with high reliability and efficiency, offering an optimal balance of performance and cost.

GLQ120		GLQ120-L1 1 段 1-Stage						GLQ120-L2 2 段 2-Stage								GLQ120-L3 3 段 3-Stage								
減速比 Speed Ratio	i	3	4	5	7	8	10	12	15	16	20	25	32	40	64	60	80	100	120	160	200	256	320	512
額定輸出扭矩 Nominal Output Torque	Nm	115	155	195	135	120	95	260	230	260	260	230	260	230	120	260	260	260	230	260	230	260	230	120
最大輸出扭矩 Maximum Output Torque	Nm	184	248	312	216	192	152	416	368	416	416	368	416	368	192	416	416	416	368	416	368	416	368	192
急停扭矩 Emergency Stop Torque	Nm	2 倍額定輸出扭矩 2 times nominal output torque																						
最大徑向力 Maximum Radial Force	N	4000																						
最大軸向力 Maximum Axial Force	N	3800																						
額定輸入轉速 Nominal Input Speed	rpm	3500																						
最大輸入轉速 Maximum Input Speed	rpm	6500																						
效率 Efficiency	%	≥98						≥97								≥92								
使用壽命 Service Life	h	20000																						
噪音值 Noise	dB	≤65																						
重量 Weight	kg	6.7						8.5								10.3								
背隙 Backlash	arcmin	≤7						≤9								≤11								
使用溫度 Operating Temperature	°C	-25~90																						
潤滑 Lubrication	-	合成潤滑油脂 Synthetic Grease																						
防護等級 Protection Class	-	IP54																						
安裝位置 Mounting Position	-	任意方向 Any Direction																						
轉動慣量 Moment of Inertia	kg·cm²	2.28	2.11	1.88	1.75	1.67	1.63	2.05								0.47							0.44	0.44

GLQ120 鍵槽 Keyway



此型錄中所有產品型號及參數如有變更，恕不另行公告。訂購前請與我們確認。

All product models and parameters in this catalog are subject to change without prior notice. Please confirm with the company before ordering.

我們的品質保證

Our Quality Assurance

精度檢驗

Precision Inspection

依各機型規格確認背隙。
以耐久試驗評估使用壽命。

Backlash is checked against each model's specifications. Endurance testing helps assess service life.

製程管制

Process Control

針對核心齒輪組與組裝對心，
設定檢驗項目以管控制程品質。

Inspection criteria for key gear sets and assembly alignment guide process quality control.

可靠度驗證

Reliability Verification

以動態負載循環與額定扭矩下的
溫升試驗，評估運轉可靠度。

Dynamic load cycling and temperature rise tests at rated torque assess operating reliability.

客製技術支援

Custom Engineering Support

依專案需求評估運動學模擬、
固有頻率分析及現場動平衡校正。

Project-specific support may include kinematic simulation, natural frequency analysis, and on-site dynamic balancing.

全生命週期品質管理

Quality Management Throughout the Product Life Cycle

備忘錄

Memo

日期 Date _____

台灣格高有限公司
GearKo Drive Technology Limited
338020 桃園市蘆竹區長興路二段72巷23號3樓
3F., No. 23, Ln. 72, Sec. 2, Changxing Rd., Luzhu Dist.,
Taoyuan City 338020, Taiwan
TEL: 03-324-0039
FAX: 03-324-0260
E-mail: info@gearko-tw.com
Web: www.gearko-tw.com